LTR	DATE	REVISION	CHK	APD
B	6/19/00	80487C - REVISE & REDRAWN ON NEW FORMAT JMB		
C	3/06/08	00833SEC-000 057883 COLOR CONCENTRATE TO BRN. CHG. NYLON 6/6 FROM 057333 TO 057318 JMB		

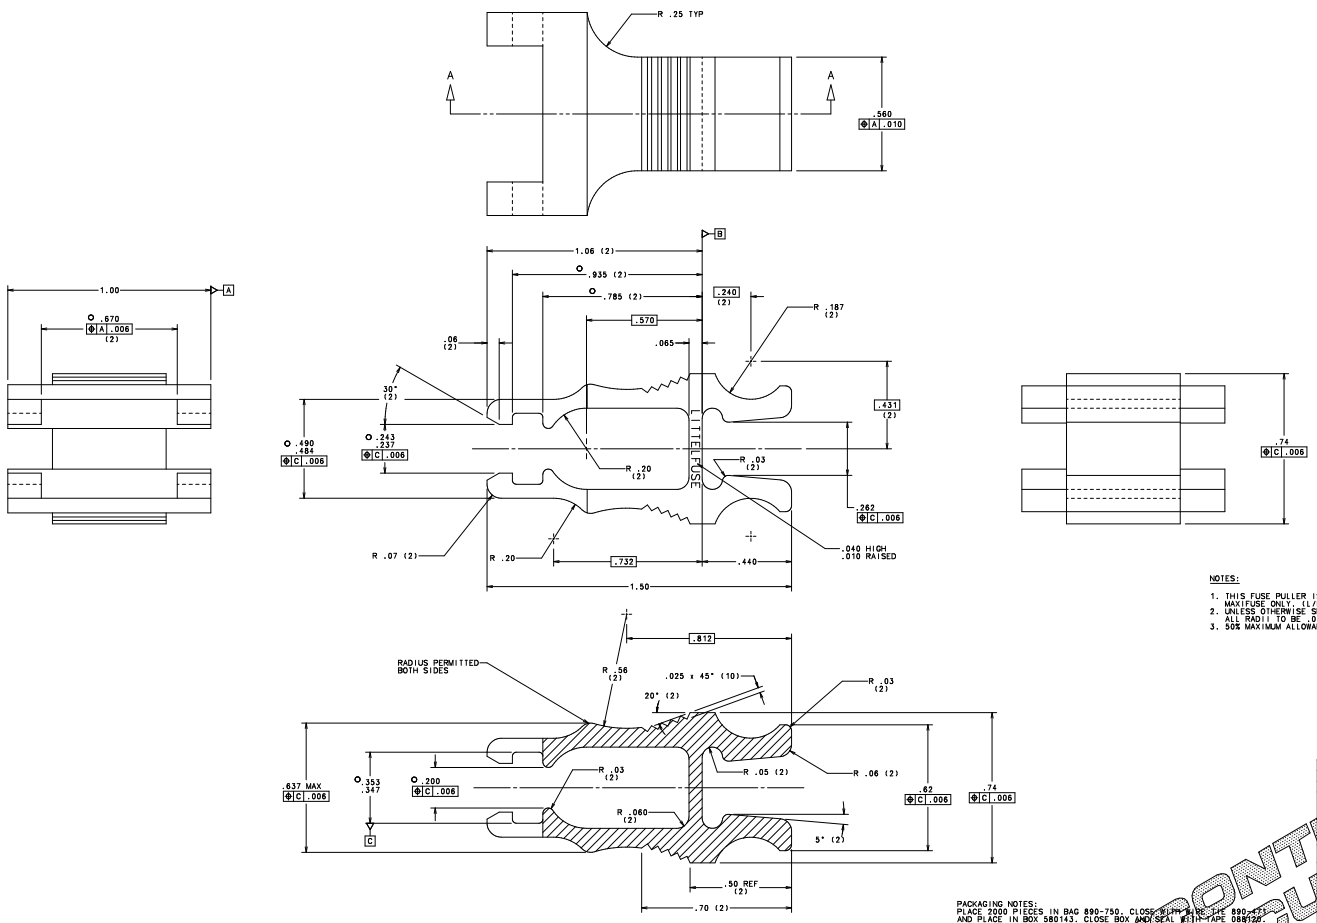

SECT. A-A

NOTES:

1. THIS FUSE PULLER IS TO MATE WITH MAXIFUSE ONLY. (L/F 0299000 SERIES)
2. UNLESS OTHERWISE SPECIFIED: ALL RADII TO BE .020 MAX.
3. 50% MAXIMUM ALLOWABLE REGRIND.

PACKAGING NOTES:
PLACE 2000 PIECES IN BAG 890-750. CLOSE WITH WIRE TIE 890-771 AND PLACE IN BOX 580143. CLOSE BOX AND SEAL WITH TAPE 088120. LABEL WITH 914-796 PRINTED TO GENERAL LABEL SPEC. LS-00000A.

ITEM	COMPONENT NO	DESCRIPTION	QTY/UNIT	U/M
5	914-796	LABEL	.500	EAD
4	890-750	PLASTIC BAG	.500	EAD
3	580143	CARTON	.500	EAD
2	057348	NYLON 6/6	8.000	LB
1	057883	GREEN CONCENTRATE	.0625	LB

BILL OF MATERIAL

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

O	DENOTES CRITICAL CHARACTERISTICS.
CPK	DENOTES KEY CHARACTERISTICS. MINIMUM CPK VALUE
SI	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE, FREQUENCY OF MEASUREMENT WILL BE DEFINED BY CUSTOMER INSPECTION INSTRUCTIONS.
SC	DENOTES SIGNIFICANT CHARACTERISTICS. MINIMUM CPK VALUE MUST BE ASSIGNED BY CUSTOMER INSTRUCTIONS WHEN CHARACTERISTICS ARE NOT CLEARLY LOCATED TO ALL DRAWINGS. (MAX. SOIL SITE).

COPIES TO

1	8	18	
2	10	19	
3	11	20	
4	12	21	
5	13	22	
6	14	23	
7	15	33	
8	16	43	
9	17	53	

DRN	JMB	DATE 5/19/00	SCALE 4:1
CHK		DATE	SUPER DR
APPD		DATE	RAW STK BY

TOLERANCE UNLESS OTHERWISE SPECIFIED
TWO PLACE DEC ±.010 FRACTION ±
THREE PLACE DEC ±.005 ANGULAR ±1°

TITLE MAXIFUSE PULLER

Littelfuse DES PLAINES, ILLINOIS 60018

REVISION C DRWG NO. FINAL 00970026N

D

UNCONTROLLED DOCUMENT

Downloaded from Elcodis.com electronic components distributor