


Axial Lead and Cartridge Fuses

Designed to UL/CSA Standards

5 x 20 mm Fast-Acting Fuse 235 Series



- Designed to UL/CSA/ANCE 248 Standard.
- Available in Cartridge and Axial Lead Format.
- Available in ratings of 0.100 to 6 amperes.

ELECTRICAL CHARACTERISTICS:

% of Ampere Rating	Opening Time
110%	4 hours, Minimum
135%	1 hour, Maximum
200%	5 second, Maximum

AGENCY APPROVALS: Listed by Underwriters Laboratories and Certified by CSA. Approved by METI from 1 through 6 amperes.



INTERRUPTING RATING:

0.10-1A	10,000 amperes at 125 VAC, 0.7-0.8 power factor 35 amperes at 250 VAC, 0.7-0.8 power factor
1.25A-3.15A	10,000 amperes at 125 VAC, 0.7-0.8 power factor 100 amperes at 250 VAC, 0.7-0.8 power factor
4A-6A	10,000 amperes at 125 VAC, 0.7-0.8 power factor

PACKAGING: For Axial Leads add packaging suffix XE. For tape and reel options contact Littelfuse.

ORDERING INFORMATION:

Catalog Number	Ampere Rating	Voltage Rating	Nominal Resistance Cold Ohms	Nominal Melting Pt A ² Sec.
235.100	.100	250	8.40	0.00160
235.125	.125	250	5.75	0.00280
235.200	.200	250	3.15	0.00890
235.250	.250	250	2.25	0.0170
235.300	.300	250	1.60	0.0330
235.400	.400	250	1.08	0.0600
235.500	.500	250	0.455	0.0710
235.600	.600	250	0.318	0.115
235.700	.700	250	0.263	0.160
235.800	.800	250	0.195	0.260
235.001	1	250	0.153	0.480
235.1.25	1.25	250	0.106	1.12
235.01.6	1.6	250	0.0775	2.08
235.002	2	250	0.0600	2.72
235.02.5	2.5	250	0.0438	5.59
235.003	3	250	0.0348	8.62
235.004	4	125	0.0248	17.60
235.005	5	125	0.0185	28.15
235.006	6	125	0.0150	48.60

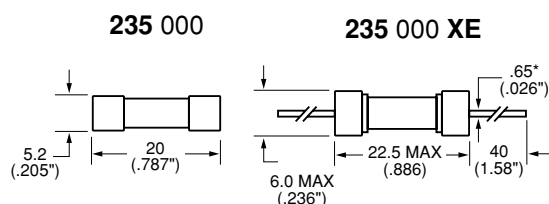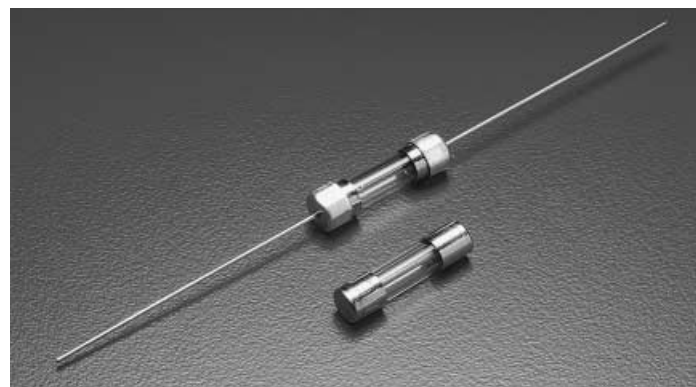

* Ratings above 6.3A have 0.8mm dia lead.

Average Time Current Curves

