

ATOF® BLADE FUSE RATED 32V



Also available:
ATO® Ag Fuse
(silver plated)



Specifications

Voltage Rating:	32 VDC
Interrupting Rating:	1000A @ 32 VDC
Operating Temperature Range:	-40°C to +105°C (Ag=-40°C to +125°C)
Terminals:	Sn plated zinc alloy
Housing Material:	PA66
Complies with:	ISO 8820-3
UL Listed:	File AU1410
CSA Certified:	File No. 29862

Ordering Information

Part Number	Package Size
0287xxx.PXCN	2000
0287xxx.U	500
0287xxx.H	100
0287xxx.L	50
ATO® Ag Fuse	
0287xxx.PXS	2000

Description

Developed by Littelfuse for the automotive industry, the ATOF® fuse has become the original equipment circuit protection standard for foreign and domestic automobiles and trucks. Readily identifiable and easily replaced, this fuse can be specified for a variety of low voltage electronic applications.

Ratings

Part Number	Current Rating	Housing Material Color	Typ. Voltage Drop	Cold Resistance	I ² t
0287001._	1 A	Black	176 mV	123 mΩ	0.4 A²s
0287002._	2 A	Grey	141 mV	53.5 mΩ	1.4 A²s
0287003._	3 A	Purple	137 mV	31.1 mΩ	7.4 A²s
0287004._	4 A	Pink	136 mV	22.8 mΩ	14 A²s
0287005._	5 A	Brown	128 mV	17.85 mΩ	26 A²s
028707.5._	7.5 A	Dark Brown	116 mV	10.91 mΩ	60 A²s
0287010._	10 A	Red	109 mV	7.70 mΩ	115 A²s
0287015._	15 A	Blue	102 mV	4.80 mΩ	340 A²s
0287020._	20 A	Yellow	98 mV	3.38 mΩ	520 A²s
0287025._	25 A	White	92 mV	2.52 mΩ	1080 A²s
0287030._	30 A	Dark Green	84 mV	1.97 mΩ	1510 A²s
0287035._	35 A	Dark Green	87 mV	1.61 mΩ	2280 A²s
0287040._	40 A	Orange	96 mV	1.44 mΩ	3310 A²s


Corresponding holder see Section "Fuse Holders."

ATOF® BLADE FUSE RATED 32V




Dimensions

Dimensions in mm

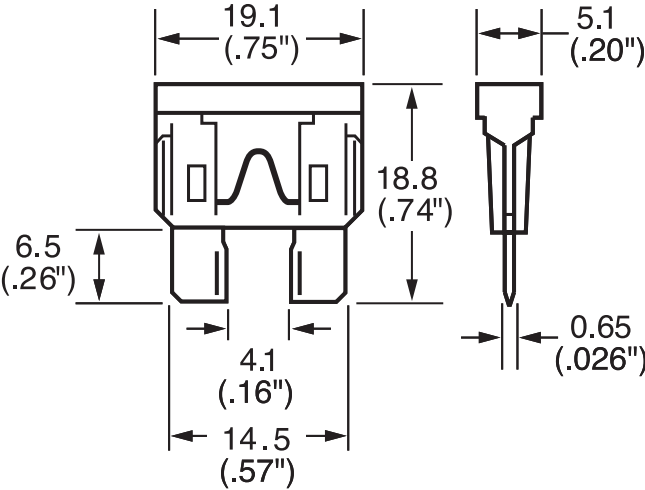


Temperature Rerating Curve

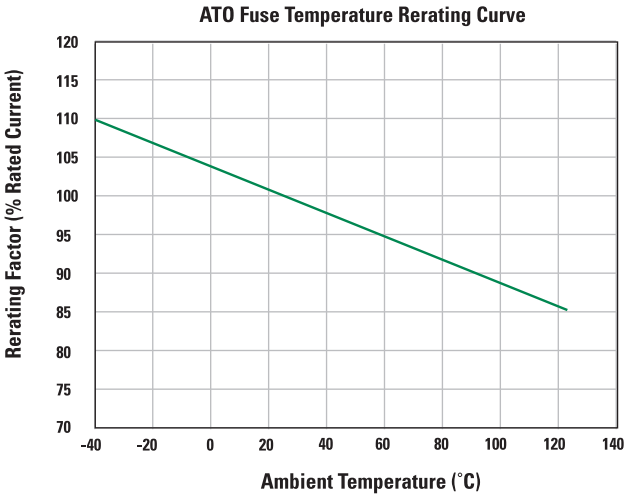

Time-Current Characteristics

% of Rating	Opening Time	Opening Time Min / Max (s)
100	35-40	360,000 s / -
110	1-30	360,000 s / -
135	1-2 3-40	350 ms / 600 s 0.750 s / 600 s
160	1-40	250 ms / 50 s
200	1-2 3-40	100 ms / 5.0 s 0.150 s / 5.0 s
350	1-2 3-40	20 ms / 500 ms 80 ms / 500 ms
600	1-30 35-40	- / 100 ms - / 150 ms

Time-Current Characteristic Curves

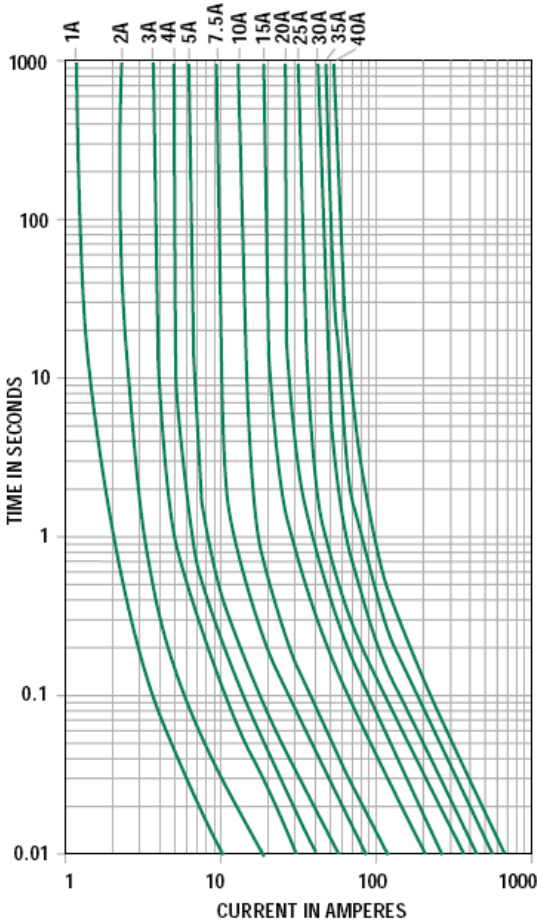

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Littelfuse:

[0287005.PXCN](#) [0287020.PXCN](#) [0287015.PXCN](#) [0287030.PXCN](#) [0287003.L](#) [0287025.PXCN](#) [0287002.PXCN](#)
[0287001.PXCN](#) [0287003.PXCN](#) [0287035.PXCN](#) [0287004.PXCN](#) [0287001.L](#) [0287002.L](#) [0287004.H](#) [0287003.H](#)
[0287030.L](#) [0287040.H](#) [0287040.L](#) [0287040.PXCN](#) [028707.5H](#) [0287010.H](#) [0287015.H](#) [0287005.H](#) [0287035.L](#)
[0287020.H](#) [0287025.L](#) [0287010.L](#) [0287004.L](#) [0287001.H](#) [028707.5L](#) [0287025.H](#) [0287005.L](#) [0287020.L](#) [0287030.H](#)
[0287010.PXCN](#) [0287002.H](#) [0287015.L](#)