


REVISIONS		
ISS	ZONE	DESCRIPTION/PER REQUEST/DATE
A1	A-6	LOGO WAS CHANGED\N/A\09-08-00
B	B-3	NO.13 WAS CHANGED\RD-DW92012402W\01-24-03

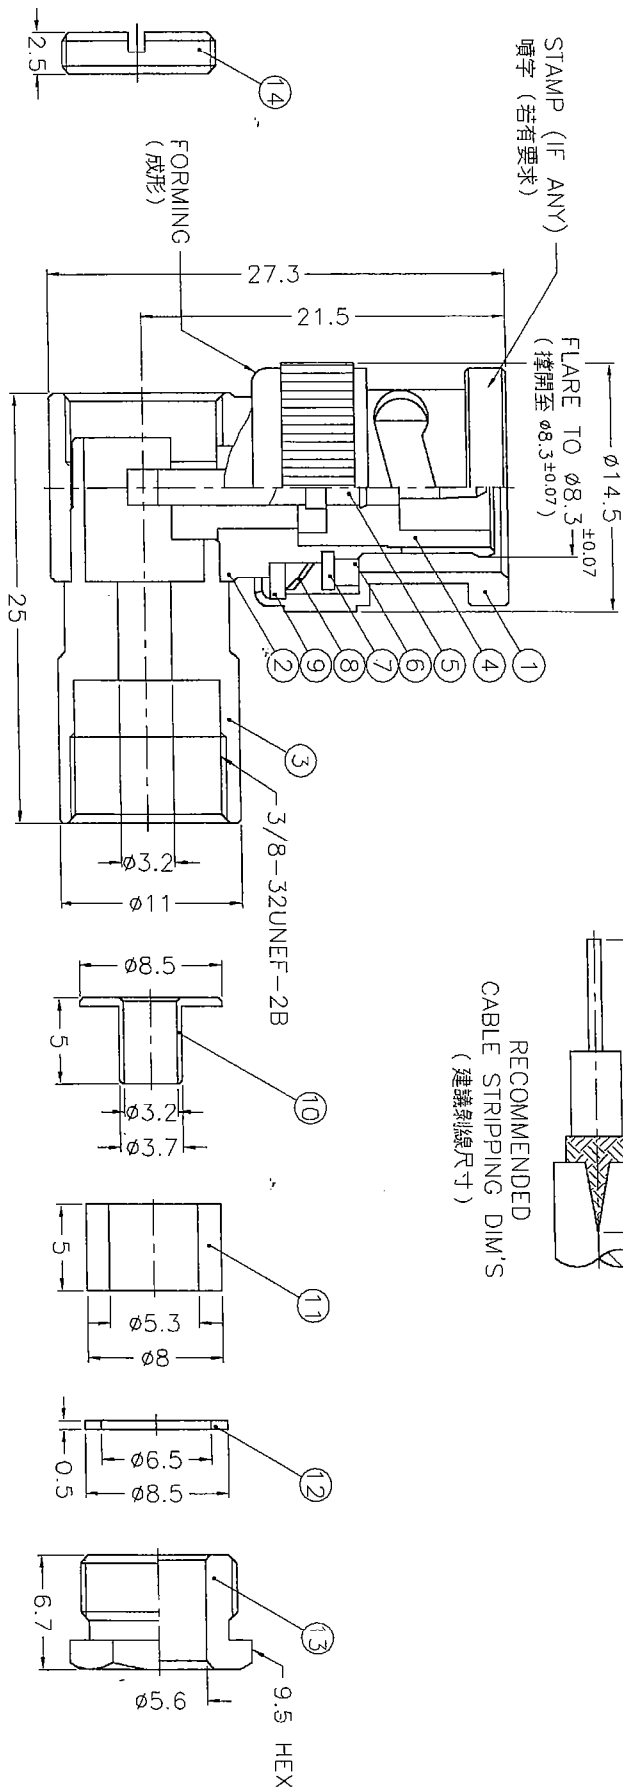

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER 00-B-626
2. BRASS PER 00-B-613
3. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
4. NICKEL PL. 200 MIN. THICK OVER COPPER STRIKE
5. SILVER PL. 80 MIN. THICK OVER COPPER STRIKE
6. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE

1. CONTACT PIN TO SOLDER

NO.	DESCRIPTION	MATERIAL	FINISH	QTY	DRAWING NO.
1	SHELL	NOTE 1	NOTE 3	1	BS0000-1-B
2	HOUSING	NOTE 1	NOTE 3	1	BS0091-2
3	BODY	NOTE 1	NOTE 3	1	BS291-3-11/32
4	INSULATOR	DELIRIN	NATURAL	1	BS0002-3-50
5	CONTACT PIN	NOTE 1	NOTE 6	1	BS0091-6-50
6	GASKET	RUBBER	RED	1	GS-115/8x15
7	RETAINER RING	NOTE 1	NOTE 3	1	BS0000-5
8	SPRING	SKS	NOTE 4	1	BS0000-6
9	WASHER	NOTE 2	NOTE 3	1	WS-128/9x08
10	TOP HAT	NOTE 1	NOTE 5	1	B1141E1-11-37/32
11	GASKET	SILICONE	RED	1	GS-8/53x5
12	WASHER	NOTE 2	NOTE 3	1	WS-85/65x05
13	HEX NUT	NOTE 1	NOTE 3	1	HN000AF14A
14	NUT	NOTE 1	NOTE 3	1	BS291-14

DIMENSIONS ARE IN MILLIMETERS

UNLESS OTHERWISE SPECIFIED

TOLERANCES

0.5-6	= ±0.2
6-30	= ±0.4
30-120	= ±0.6
120-315	= ±1.1
315-1000	= ±1.6
1000-2000	= ±2.4

APPROVED

CHECKED

DRAWN

DATE

DATE

DATE

Amphenol

Danbury,CT,USA-Tainan,Taiwan-Shenzhen,China

BNC R/A CLAMP PLUG

(FOR RG-58C/U, 58/U, 142A/U, 223/U)

DRAWING NO.

B1142E1-ND3G-58U-50

ITEM NO.

011142AA58ND5F

1 2 3 4 5 6 7 8