



# SAW Components

Data Sheet B3825


Data Sheet

**SAW Components**
**B3825**
**Low-Loss Filter**
**380,00 MHz**
**Data Sheet**
**Features**

- IF low-loss filter for base stations
- Channel selection in W-CDMA systems
- Balanced and unbalanced operation possible
- 3,84 MHz usable bandwidth
- Ceramic SMD package

**Terminals**


- Gold plated

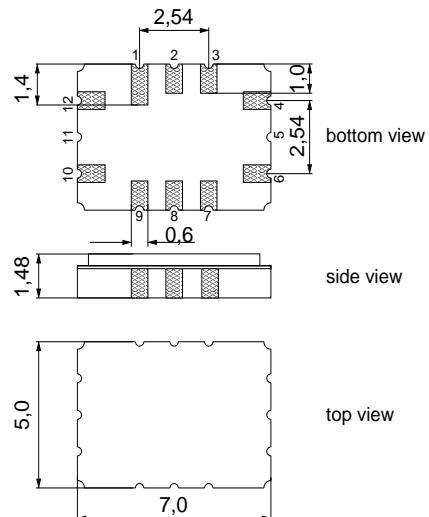**Ceramic package QCC12C**


Dim. in mm, aprox. weight 0,22 g

**Pin configuration**

12	Input
10	Input ground or balanced input
6	Output
4	Output ground or balanced output
1, 2, 7, 8	to be grounded
3, 9	Case - ground

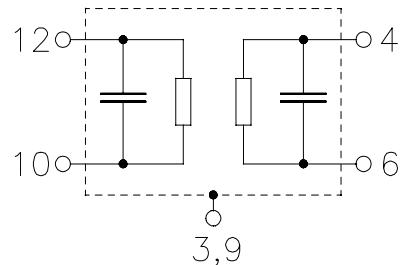

Type	Ordering code	Marking and Package according to	Packing according to
B3825	B39381-B3825-H310	C61157-A7-A95	F61074-V8170-Z000

**Electrostatic Sensitive Device (ESD)**
**Maximum ratings**

Operable temperature range	$T$	- 40/+ 85	°C	
Storage temperature range	$T_{stg}$	- 40/+ 85	°C	
DC voltage	$V_{DC}$	0	V	
Source power	$P_s$	10	dBm	

**SAW Components****B3825****Low-Loss Filter****380,00 MHz****Data Sheet****Characteristics (unbalanced operation)**Operating temperature:  $T = -10$  to  $+85$  °CTerminating source impedance:  $Z_S = 577 \Omega \parallel 20 \text{ nH}$ Terminating load impedance:  $Z_L = 817 \Omega \parallel 21 \text{ nH}$ 

		<b>min.</b>	<b>typ.</b>	<b>max.</b>	
<b>Nominal frequency</b>	$f_N$	—	380,0	—	MHz
<b>Minimum insertion attenuation</b> (including matching network <sup>1)</sup> )	$\alpha_{\min}$	8,0	8,9	10,0	dB
<b>Passband width</b>	$B_{3,0\text{dB}}$				
	$\alpha_{\text{rel}} \leq 3,0 \text{ dB}$	4,9	5,1	5,3	MHz
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$				
	$f_N \pm 1,92 \text{ MHz}$	0,2	1,0	1,2	dB
<b>Phase ripple (p-p)</b>	$\Delta\varphi$				
	$f_N \pm 1,92 \text{ MHz}$	3,0	5,0	7,0	°
<b>Absolute group delay</b>	$\tau$				
	@ $f_N$	360	460	560	ns
<b>Group delay ripple (p-p)</b>	$\Delta\tau$				
	$f_N \pm 1,92 \text{ MHz}$	40	80	180	ns
<b>Mean value of absolute group delay</b>	$\bar{\tau}$				
	$f_N \pm 1,92 \text{ MHz}$	440	460	480	ns
<b>Adjacent channel selectivity</b>	ACS	24	32	39	dB
<b>Intermodulation</b>	$IM3$				
	$f_1 = 360 \text{ MHz}$ , input power 0 dBm				
	$f_2 = 370 \text{ MHz}$ , input power 0 dBm				
	@ $f_N$	-120	-95	-85	dBm
	$f_1 = 360 \text{ MHz}$ , input power -5 dBm				
	$f_2 = 370 \text{ MHz}$ , input power -5 dBm				
	@ $f_N$	-135	-110	-100	dBm


**SAW Components**
**B3825**
**Low-Loss Filter**
**380,00 MHz**
**Data Sheet**


	min.	typ.	max.	
$f_1 = 390 \text{ MHz, input power } 0 \text{ dBm}$ $f_2 = 400 \text{ MHz, input power } 0 \text{ dBm}$ $\text{at } f_N$	-120	-95	-85	dBm
$f_1 = 390 \text{ MHz, input power } -5 \text{ dBm}$ $f_2 = 400 \text{ MHz, input power } -5 \text{ dBm}$ $\text{at } f_N$	-135	-110	-100	dBm
<b>Minimum relative attenuation</b> (relative to $\alpha_{\min}$ ) $\alpha_{\text{rel}}$				
at $f_N - 5,0 \text{ MHz}$	37	40	50	dB
at $f_N + 5,0 \text{ MHz}$	40	45	50	dB
DC ... $f_N - 20,0 \text{ MHz}$	42	46	55	dB
$f_N - 20,0 \text{ MHz} \dots f_N - 17,5 \text{ MHz}$	35	38	45	dB
$f_N - 17,5 \text{ MHz} \dots f_N - 13,5 \text{ MHz}$	42	45	55	dB
$f_N - 13,5 \text{ MHz} \dots f_N - 7,5 \text{ MHz}$	38	40	45	dB
$f_N - 7,5 \text{ MHz} \dots f_N - 4,1 \text{ MHz}$	35	38	45	dB
$f_N - 4,1 \text{ MHz} \dots f_N - 3,2 \text{ MHz}$	20	22	40	dB
$f_N + 3,2 \text{ MHz} \dots f_N + 4,1 \text{ MHz}$	20	23	40	dB
$f_N + 4,1 \text{ MHz} \dots f_N + 5,0 \text{ MHz}$	34	37	45	dB
$f_N + 5,0 \text{ MHz} \dots f_N + 8,0 \text{ MHz}$	37	39	45	dB
$f_N + 8,0 \text{ MHz} \dots f_N + 10,5 \text{ MHz}$	32	35	45	dB
$f_N + 10,5 \text{ MHz} \dots f_N + 17,5 \text{ MHz}$	39	42	50	dB
$f_N + 17,5 \text{ MHz} \dots f_N + 20,0 \text{ MHz}$	35	38	45	dB
$f_N + 20,0 \text{ MHz} \dots f_N + 100,0 \text{ MHz}$	40	43	55	dB
<b>Impedance at <math>f_N</math> (without matching)</b>				
Input: $Z_{\text{IN}} = R_{\text{IN}} \parallel C_{\text{IN}}$	—	795 $\parallel$ 6	—	$\Omega \parallel \text{pF}$
Output: $Z_{\text{OUT}} = R_{\text{OUT}} \parallel C_{\text{OUT}}$	—	652 $\parallel$ 6	—	$\Omega \parallel \text{pF}$
<b>Temperature coefficient of frequency</b> <sup>2)</sup>	$TC_f$	—	-0,036	ppm/K <sup>2</sup>
<b>Turnover temperature</b>	$T_0$	—	25	°C

<sup>1)</sup> Matching inductor Q=40

<sup>2)</sup> Temperature dependance of  $f_c$ :  $f_c(T_A) = f_c(T_0)(1 + TC_f(T_A - T_0)^2)$

**Matching network**

(Element values depend upon PCB layout)

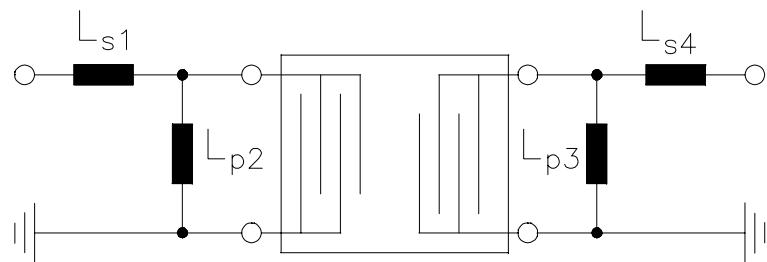

**SAW Components**


**B3825**

**Low-Loss Filter**


**380,00 MHz**

**Data Sheet**

**Normalized frequency response**

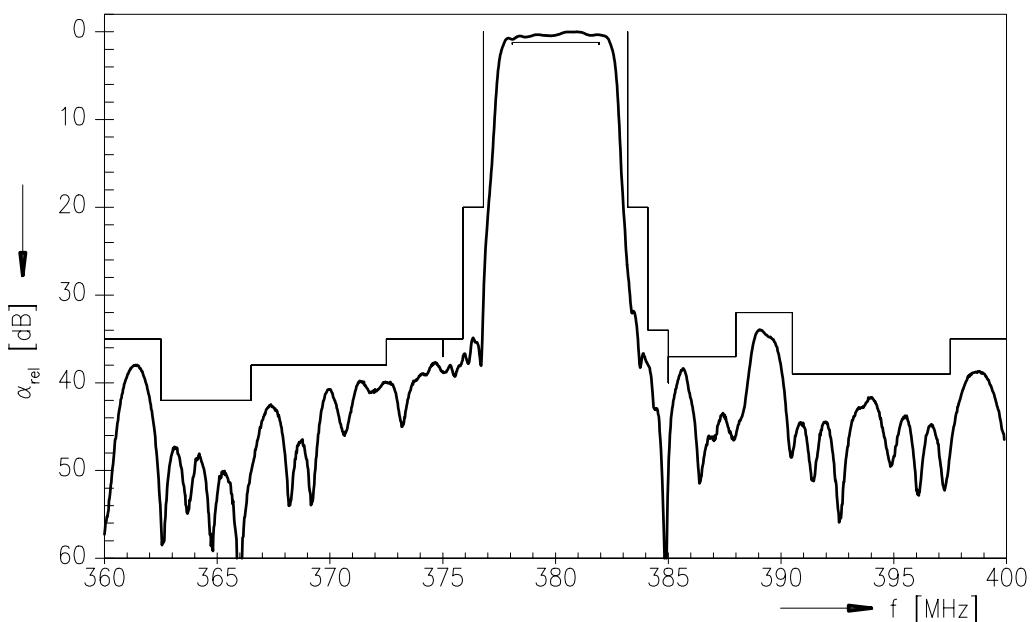

**Normalized frequency response (pass band)**

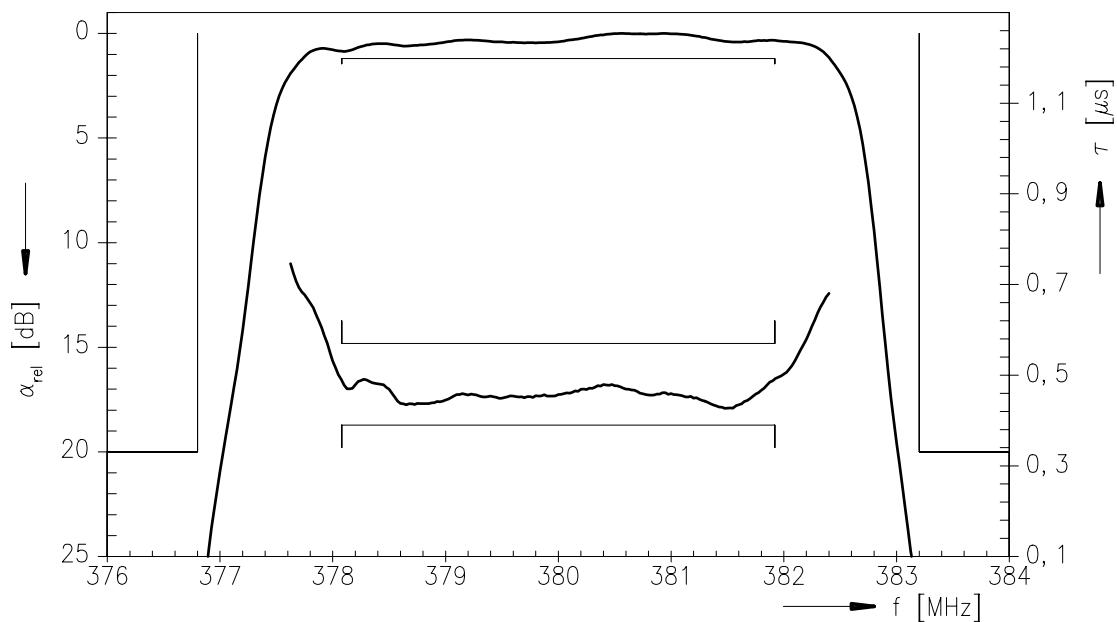



<b>SAW Components</b>	<b>B3825</b>
<b>Low-Loss Filter</b>	<b>380,00 MHz</b>

Data Sheet

**Published by EPCOS AG**

**Surface Acoustic Wave Components Division, SAW MC IS**

**P.O. Box 80 17 09, D-81617 München**

© EPCOS AG 2003. All Rights Reserved. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this brochure describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.