




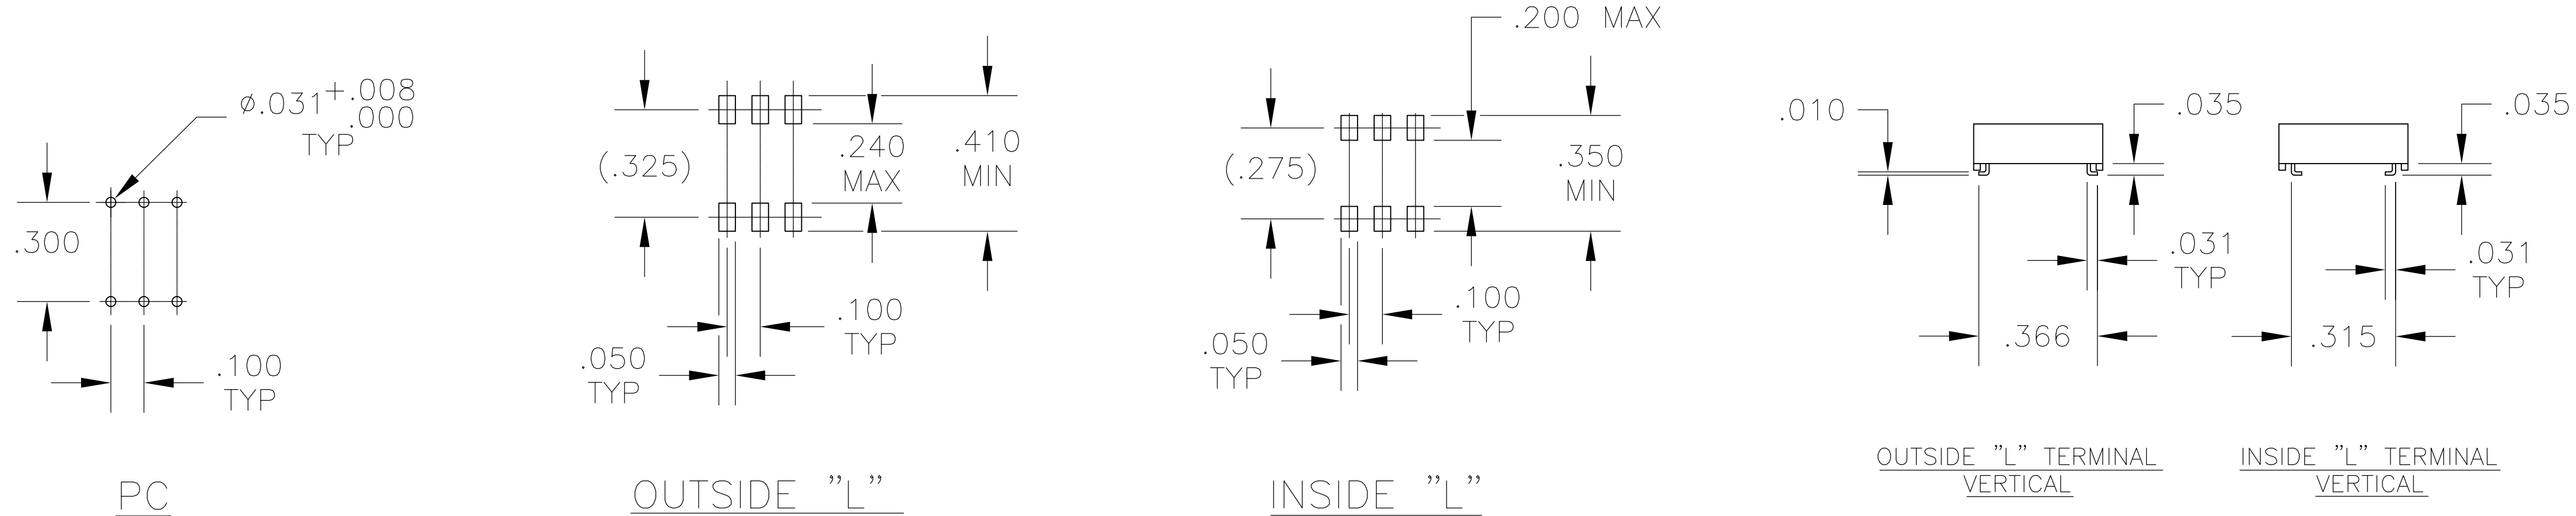


# PRINTED CIRCUIT BOARD LAYOUTS

## TERMINAL CONFIGURATIONS

## TRUTH TABLES

TERMINAL IDENTIFICATION  
(VIEWED FROM BOTTOM OF SWITCH)



10-POSITION, BCD ROTOR - RED

[illegible]

16-POSITION, HEXADECIMAL ROTOR - BLACK

| POS | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | A | B | C | D | E | F |
|-----|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| C   | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X |
| 1   |   | X |   | X |   | X |   | X |   | X |   | X |   | X |   | X |
| 2   |   |   | X | X |   |   | X | X |   |   | X | X |   |   | X | X |
| 4   |   |   |   |   | X | X | X | X |   |   |   |   | X | X | X | X |
| 8   |   |   |   |   |   |   |   |   | X | X | X | X | X | X | X | X |

10 POSITION,  
BCD COMPLEMENT ROTOR - ORANGE

[illegible]

16-POSITION, HEXADECIMAL COMPLEMENT ROTOR - WHITE

| POS            | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | A | B | C | D | E | F |
|----------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| $\overline{C}$ | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X |
| $\overline{1}$ | X |   | X |   | X |   | X |   | X |   | X |   | X |   | X |   |
| $\overline{2}$ | X | X |   |   | X | X |   |   | X | X |   |   | X | X |   |   |
| $\overline{4}$ | X | X | X | X |   |   |   |   | X | X | X | X |   |   |   |   |
| $\overline{8}$ | X | X | X | X | X | X | X | X |   |   |   |   |   |   |   |   |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[DRD10CE04](#)