



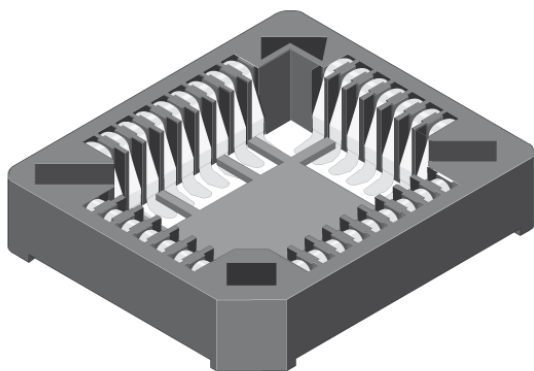

Pitch (mm)	1,27
No of contacts	20, 28, 32, 44, 68, 84
Material contact	Phosphor bronze
Material insulator	High temp. thermoplast UL94V-0
Rated current	1,0 A
Rated voltage	100 V _{RMS} / V _{DC}
Withstand voltage	600 V _{RMS} for 1 minute
Operating temperature	-40°C to +85°C
Max. processing temper.	260°C for 10 seconds
Packaging	Reel, Tube

PLCC sockets with SMD terminations (acc. JEDEC MO-047 / MO-052) offering the same PCB layout as the IC package.

Standard Variation.

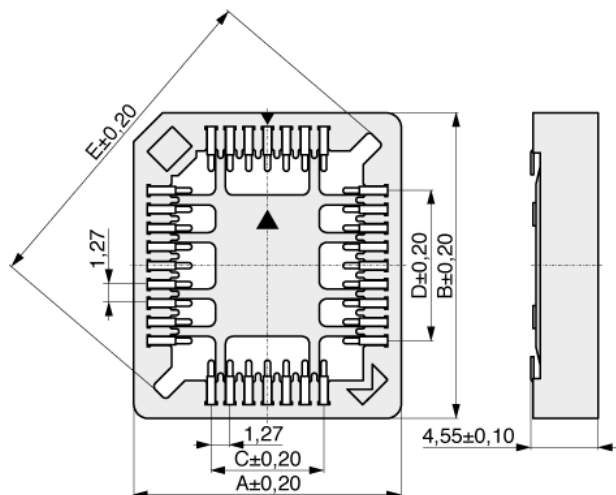

PCB layout

