


© MPE-GARRY

Right angled pin headers 2,54 mm pitch and 0,64 mm square pins. Any pin length available on request.

Single row pinheader.

Pitch (mm)	2,54
Mating contact size	sq. 0,64
No of contacts	1, 2, 3, 4, 5, ... 50
Polarising	No
Locking	No
Material contact	Copper alloy
Plating contact	Sn, Au, Selective Au (min 5 mm on mating side)
Material insulator	High temp. thermoplast UL94V-0
Rated current	3,0 A
Rated voltage	250 V _{RMS} / V _{DC} Please consider air- and creepage distances
Withstand voltage	500 V _{RMS} for 1 minute
Operating temperature	-40°C to +105°C
Max. processing temper.	260°C for 10 seconds
Packaging	Standard
A (Length)	7,40 8,70 10,00 10,80 13,80 ...
B (Mating)	21,00 3,50 4,80 6,10 6,90 9,90 ...
C (PCB side)	Custom 3,30

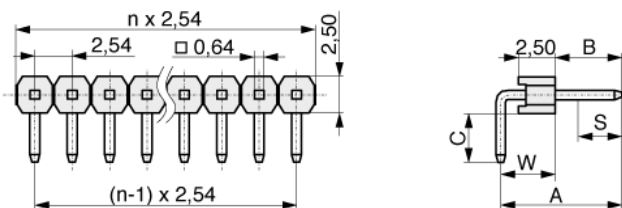

PCB layout

