


## SINGLE OPERATIONAL AMPLIFIERS

|                                       | LM101A<br>LM201A | LM301A |
|---------------------------------------|------------------|--------|
| ■ INPUT OFFSET VOLTAGE                | 0.7mV            | 2mV    |
| ■ INPUT BIAS CURRENT                  | 25nA             | 70nA   |
| ■ INPUT OFFSET CURRENT                | 1.5nA            | 2nA    |
| ■ SLEW RATE AS INVERTING<br>AMPLIFIER | 10V/μs           | 10V/μs |

### DESCRIPTION

The LM101A is a general-purpose operational amplifier. This amplifier offers many features : supply voltages from  $\pm 5$  V to  $\pm 22$  V, low current drain, overload protection on the input and output, no latch-up when the common-mode range is exceeded, freedom from oscillations and compensation with a single 30pF capacitor. It has advantages over internally compensated amplifiers in that the compensation can be tailored to the particular application : slew rates of 10 V/μs and bandwidths of 3.5MHz can be easily achieved.

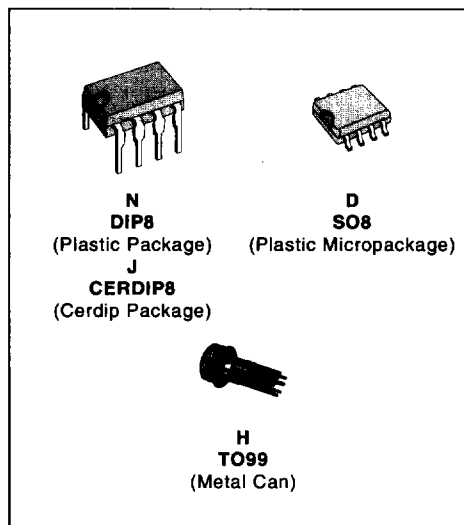


### ORDER CODES

| Part Number | Temperature Range | Package |   |   |   |
|-------------|-------------------|---------|---|---|---|
|             |                   | H       | N | J | D |
| LM101A      | -55, +125°C       | •       | • | • | • |
| LM201A      | -40, +105°C       | •       | • | • | • |
| LM301A      | 0, +70°C          | •       | • | • | • |


Examples : LM101AH, LM201AN

101-01.TBL

### PIN CONNECTIONS (top views)

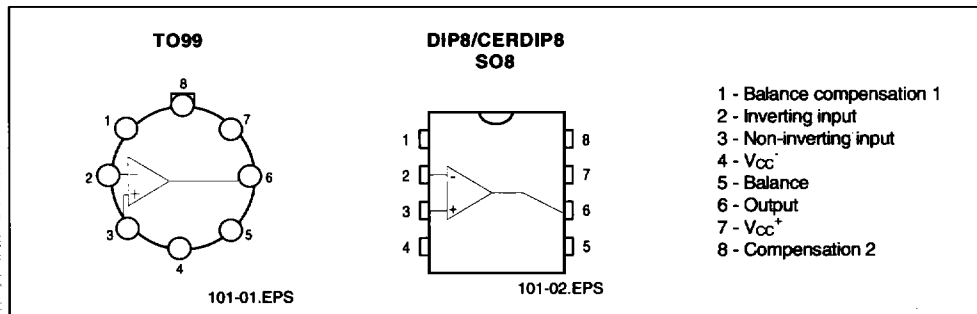

## SCHEMATIC DIAGRAM

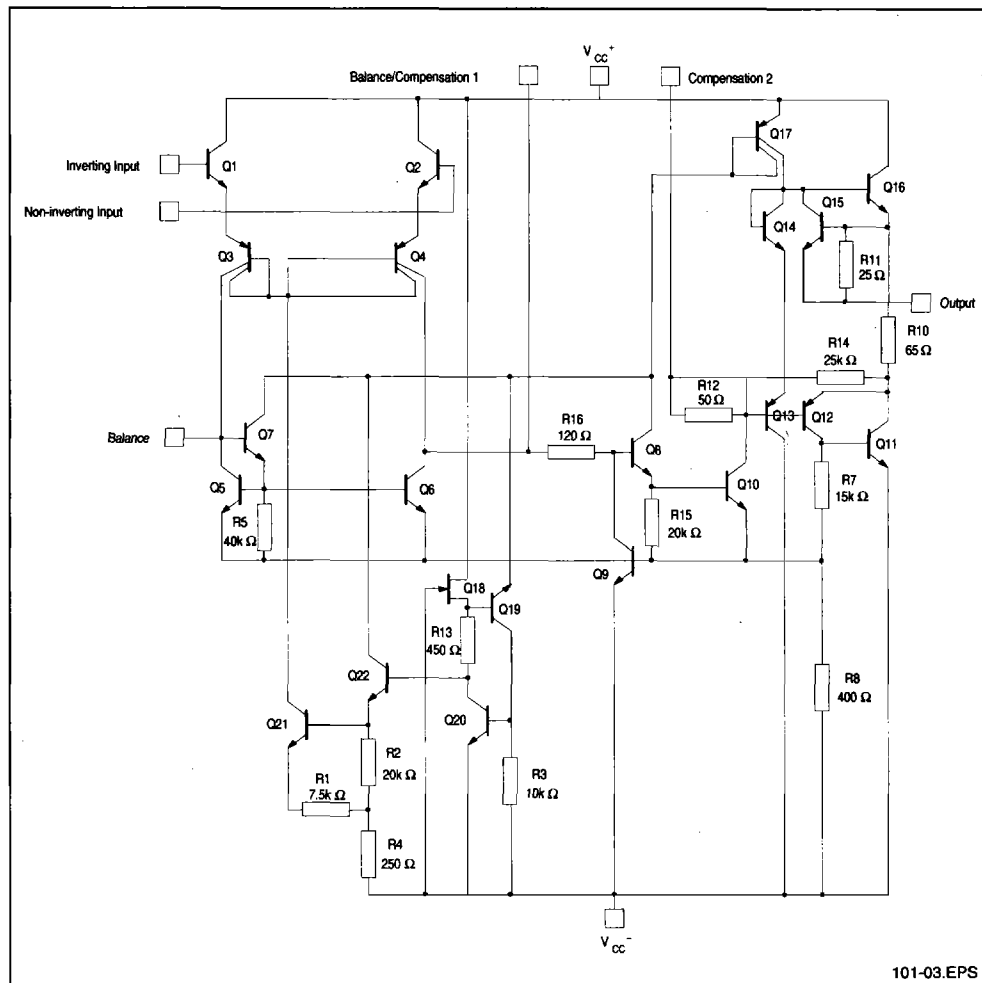

## ABSOLUTE MAXIMUM RATINGS

| Symbol     | Parameter                            | LM101A                    | LM201A          | LM301A          | Unit               |
|------------|--------------------------------------|---------------------------|-----------------|-----------------|--------------------|
| $V_{CC}$   | Supply Voltage                       | $\pm 22$                  | $\pm 22$        | $\pm 22$        | V                  |
| $V_{id}$   | Differential Input Voltage           | $\pm 30$                  | $\pm 30$        | $\pm 30$        | V                  |
| $V_i$      | Input Voltage                        | $\pm 15$                  | $\pm 15$        | $\pm 15$        | V                  |
|            | Output Short-circuit Duration        | Infinite                  |                 |                 |                    |
| $P_{tot}$  | Power Dissipation                    | 500<br>300                |                 |                 | mW                 |
|            |                                      | N.J.H. Suffix<br>D Suffix |                 |                 |                    |
| $T_{oper}$ | Operating Free-air Temperature Range | $-55$ to $+125$           | $-40$ to $+105$ | $0$ to $+70$    | $^{\circ}\text{C}$ |
| $T_{slg}$  | Storage Temperature Range            | $-65$ to $+150$           | $-65$ to $+150$ | $-65$ to $+150$ | $^{\circ}\text{C}$ |

## ELECTRICAL CHARACTERISTICS

|        |                                                               |                                                        |                     |
|--------|---------------------------------------------------------------|--------------------------------------------------------|---------------------|
| LM301A | $0^{\circ}\text{C} < T_{\text{amb}} < +70^{\circ}\text{C}$    | $\pm 5\text{V} \leq V_{\text{CC}} \leq \pm 20\text{V}$ | $C_1 = 30\text{pF}$ |
| LM201A | $-40^{\circ}\text{C} < T_{\text{amb}} < +105^{\circ}\text{C}$ | $\pm 5\text{V} \leq V_{\text{CC}} \leq \pm 20\text{V}$ | $C_1 = 30\text{pF}$ |
| LM101A | $-55^{\circ}\text{C} < T_{\text{amb}} < +125^{\circ}\text{C}$ | $\pm 5\text{V} \leq V_{\text{CC}} \leq \pm 20\text{V}$ | $C_1 = 30\text{pF}$ |

\*  $\Rightarrow V_{\text{CC}} = \pm 15\text{V}$ ,  $T_{\text{amb}} = 25^{\circ}\text{C}$  (unless otherwise specified)


| Symbol               | Parameter                                                                                                                                                                                                    | LM101A - LM201A                                                                                                                                |                      |           | LM301A               |          |            | Unit |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|-----------|----------------------|----------|------------|------|
|                      |                                                                                                                                                                                                              | Min.                                                                                                                                           | Typ.                 | Max.      | Min.                 | Typ.     | Max.       |      |
| $V_{\text{io}}$      | Input Offset Voltage ( $R_{\text{S}} \leq 10\text{k}\Omega$ )<br>$T_{\text{amb}} = 25^{\circ}\text{C}$<br>$T_{\text{min.}} \leq T_{\text{amb}} \leq T_{\text{max.}}$                                         |                                                                                                                                                | 0.7                  | 2<br>3    |                      | 2        | 7.5<br>10  | mV   |
| $I_{\text{ib}}$      | Input Bias Current<br>$T_{\text{amb}} = 25^{\circ}\text{C}$<br>$T_{\text{min.}} \leq T_{\text{amb}} \leq T_{\text{max.}}$                                                                                    |                                                                                                                                                | 25                   | 75<br>100 |                      | 70       | 250<br>300 | nA   |
| $I_{\text{io}}$      | Input Offset Current<br>$T_{\text{amb}} = 25^{\circ}\text{C}$<br>$T_{\text{min.}} \leq T_{\text{amb}} \leq T_{\text{max.}}$                                                                                  |                                                                                                                                                | 1.5                  | 10<br>20  |                      | 2        | 50<br>70   | nA   |
| $A_{\text{vd}}$      | Large Signal Voltage Gain *<br>( $V_{\text{O}} = \pm 10\text{V}$ , $R_{\text{L}} = 2\text{k}\Omega$ )<br>$T_{\text{amb}} = 25^{\circ}\text{C}$<br>$T_{\text{min.}} \leq T_{\text{amb}} \leq T_{\text{max.}}$ | 50<br>25                                                                                                                                       | 100                  |           | 25<br>15             | 100      |            | V/mV |
| SVR                  | Supply Voltage Rejection Ratio ( $R_{\text{S}} \leq 10\text{k}\Omega$ )<br>$T_{\text{amb}} = 25^{\circ}\text{C}$<br>$T_{\text{min.}} \leq T_{\text{amb}} \leq T_{\text{max.}}$                               | 80<br>80                                                                                                                                       | 96                   |           | 70<br>70             | 96       |            | dB   |
| $I_{\text{CC}}$      | Supply Current no Load<br>$T_{\text{amb}} = 25^{\circ}\text{C}$<br>$T_{\text{min.}} \leq T_{\text{amb}} \leq T_{\text{max.}}$                                                                                |                                                                                                                                                | 1.8                  | 3<br>3    |                      | 1.8      | 3<br>3     | mA   |
| $V_{\text{icm}}$     | Input Common Mode Voltage Range<br>( $V_{\text{CC}} = \pm 20\text{V}$ )<br>$T_{\text{amb}} = 25^{\circ}\text{C}$<br>$T_{\text{min.}} \leq T_{\text{amb}} \leq T_{\text{max.}}$                               | $\pm 15$<br>$\pm 15$                                                                                                                           |                      |           | $\pm 15$<br>$\pm 15$ |          |            | V    |
| CMR                  | Common Mode Rejection Ratio ( $R_{\text{S}} \leq 10\text{k}\Omega$ )<br>$T_{\text{amb}} = 25^{\circ}\text{C}$<br>$T_{\text{min.}} \leq T_{\text{amb}} \leq T_{\text{max.}}$                                  | 80<br>80                                                                                                                                       | 96                   |           | 70<br>70             | 96       |            | dB   |
| $I_{\text{OS}}$      | Output Short-circuit Current *<br>$T_{\text{amb}} = 25^{\circ}\text{C}$                                                                                                                                      | 10                                                                                                                                             | 30                   | 50        | 10                   | 30       | 50         | mA   |
| $\pm V_{\text{OPP}}$ | Output Voltage Swing *<br>$T_{\text{amb}} = 25^{\circ}\text{C}$<br>$T_{\text{min.}} \leq T_{\text{amb}} \leq T_{\text{max.}}$                                                                                | $R_{\text{L}} = 10\text{k}\Omega$<br>$R_{\text{L}} = 2\text{k}\Omega$<br>$R_{\text{L}} = 10\text{k}\Omega$<br>$R_{\text{L}} = 2\text{k}\Omega$ | 12<br>14<br>10<br>13 |           | 12<br>10<br>12<br>10 | 14<br>13 |            | V    |

101-03.TBL


ELECTRICAL CHARACTERISTICS (continued)

| Symbol    | Parameter                                                                                                                             | LM101A - LM201A |          |            | LM301A |          |            | Unit                   |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------|------------|--------|----------|------------|------------------------|
|           |                                                                                                                                       | Min.            | Typ.     | Max.       | Min.   | Typ.     | Max.       |                        |
| SR        | Slew Rate ( $V_I = \pm 10V$ , $R_L = 2k\Omega$ , $C_L = 100pF$ , $T_{amb} = 25^\circ C$ , unity gain) - (note 1) *                    | 0.25            | 0.5      |            | 0.25   | 0.5      |            | V/ $\mu s$             |
| $t_r$     | Rise Time ( $V_I = \pm 20 \mu V$ , $R_L = 2k\Omega$ , $C_L = 100pF$ , $T_{amb} = 25^\circ C$ , unity gain) *                          |                 | 0.3      |            |        | 0.3      |            | $\mu s$                |
| $K_{OV}$  | Overshoot ( $V_I = 20 mV$ , $R_L = 2k\Omega$ , $C_L = 100pF$ , $T_{amb} = 25^\circ C$ , unity gain)                                   |                 | 5        |            |        | 5        |            | %                      |
| $Z_i$     | Input Impedance *                                                                                                                     | 1.5             | 4        |            | 1.5    | 4        |            | M $\Omega$             |
| $R_o$     | Output Resistance *                                                                                                                   |                 | 75       |            |        | 75       |            | $\Omega$               |
| GBP       | Gain Bandwidth Product * ( $V_I = 10mV$ , $R_L = 2k\Omega$ , $C_L = 100pF$ , $f = 100kHz$ , $T_{amb} = 25^\circ C$ )                  | 0.5             | 1        |            | 0.5    | 1        |            | MHz                    |
| THD       | Total Harmonic Distortion ( $f = 1kHz$ , $A_V = 20dB$ , $R_L = 2k\Omega$ , $V_O = 2V_{PP}$ , $C_L = 100pF$ , $T_{amb} = 25^\circ C$ ) |                 | 0.015    |            |        | 0.015    |            | %                      |
| $e_n$     | Equivalent Input Noise Voltage ( $f = 1kHz$ , $R_s = 100\Omega$ )                                                                     |                 | 25       |            |        | 25       |            | $\frac{nV}{\sqrt{Hz}}$ |
| $DV_{IO}$ | Input Offset Voltage Drift<br>$T_{min.} \leq T_{amb} \leq T_{max.}$                                                                   |                 | 3        | 15         |        | 6        | 30         | $\mu V/^\circ C$       |
| $DI_{IO}$ | Input Offset Current Drift<br>$25^\circ C \leq T_{amb} \leq T_{max.}$<br>$T_{min.} \leq T_{amb} \leq 25^\circ C$                      |                 | 10<br>20 | 100<br>200 |        | 10<br>20 | 300<br>600 | $pA/^\circ C$          |


Note : 1. May be improved up to 10V/ $\mu s$  in inverting amplifier configuration (see basic diagram).

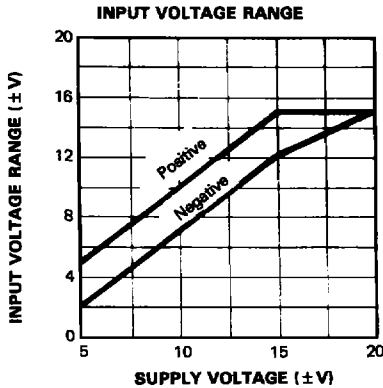


101-04.EPS

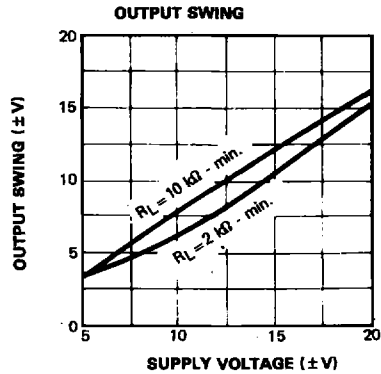


101-05.EPS

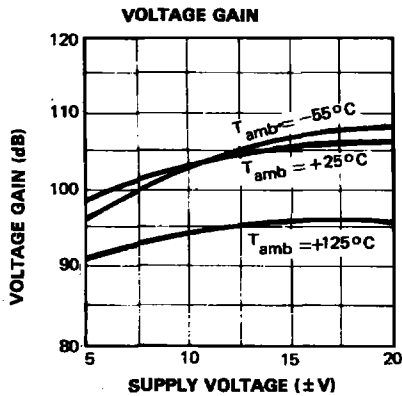


101-06.EPS

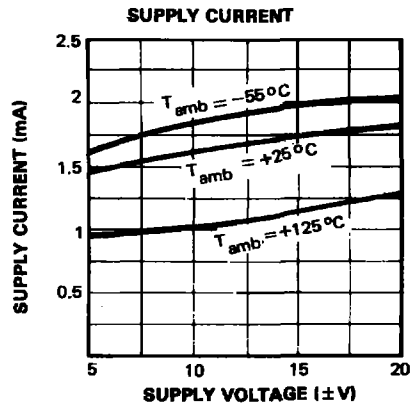


101-07.EPS

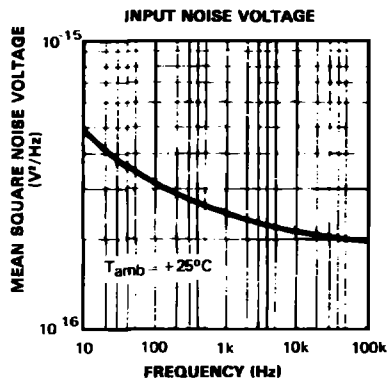


101-08.EPS

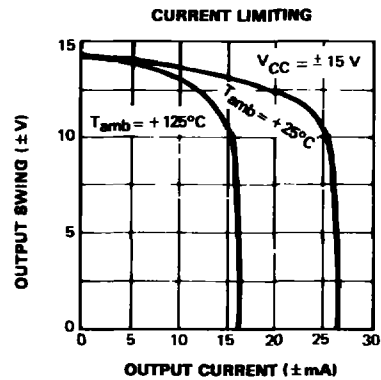

101-09.EPS

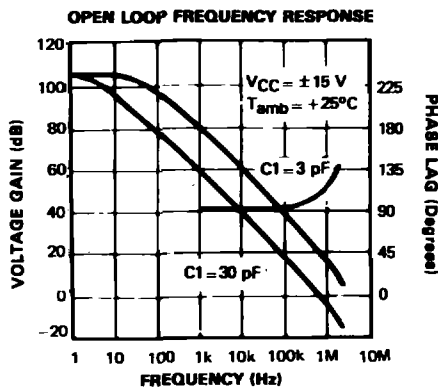
**SINGLE POLE COMPENSATION**

101-10.EPS

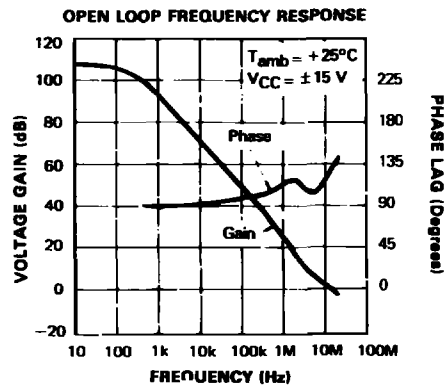**FEED FORWARD COMPENSATION**


101-11.EPS

# SINGLE POLE COMPENSATION

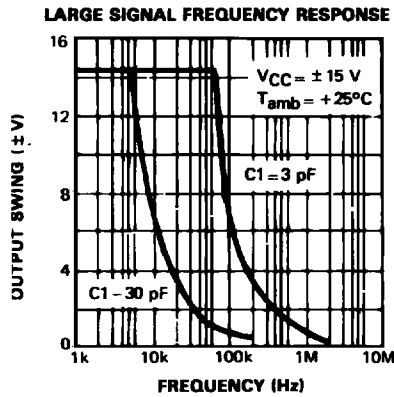


101-12.EPS


# FEED FORWARD COMPENSATION

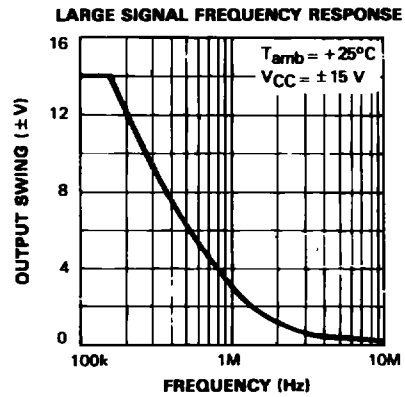


101-13.EPS

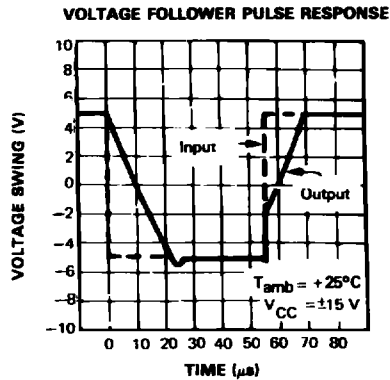


101-14.EPS

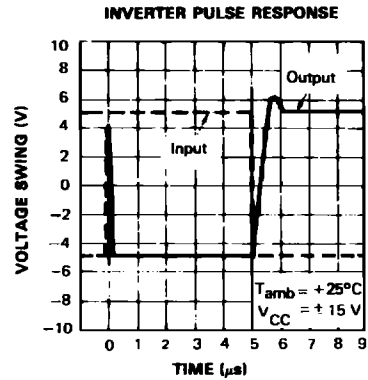

101-15.EPS

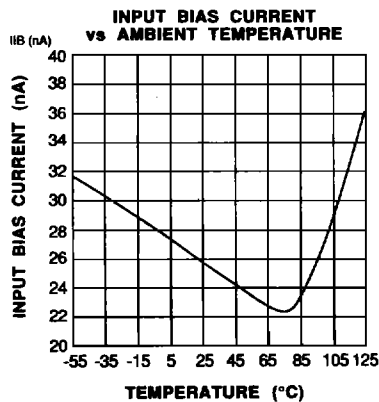


101-16.EPS

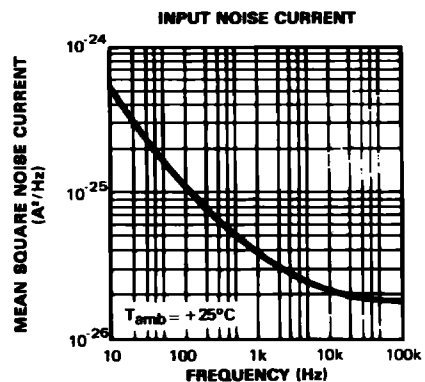


101-17.EPS

## BASIC DIAGRAM


### BALANCING CIRCUIT

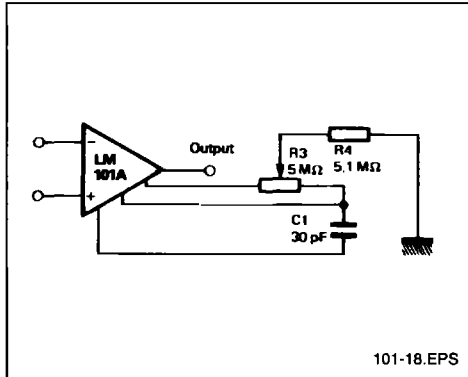


### ALTERNATE BALANCING CIRCUIT

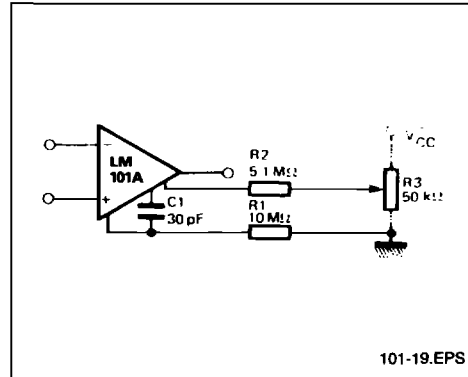


### SINGLE POLE COMPENSATION

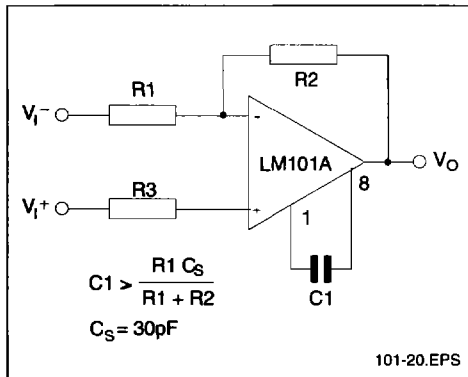

### FEEDFORWARD COMPENSATION

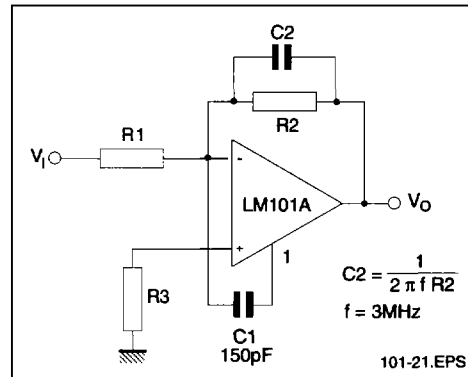


### PROTECTING AGAINST GROSS FAULT CONDITIONS

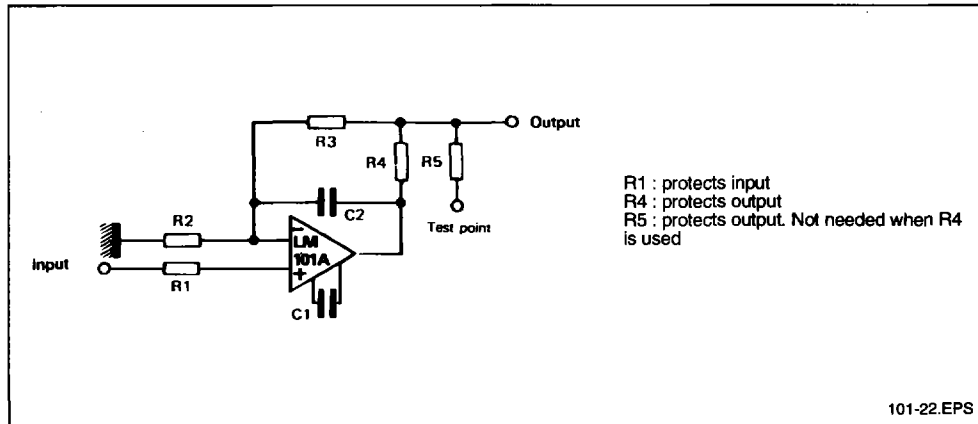


# BASIC DIAGRAM (continued)

## COMPENSATING FOR STRAY INPUT CAPACITANCES OR LARGE FEEDBACK RESISTOR

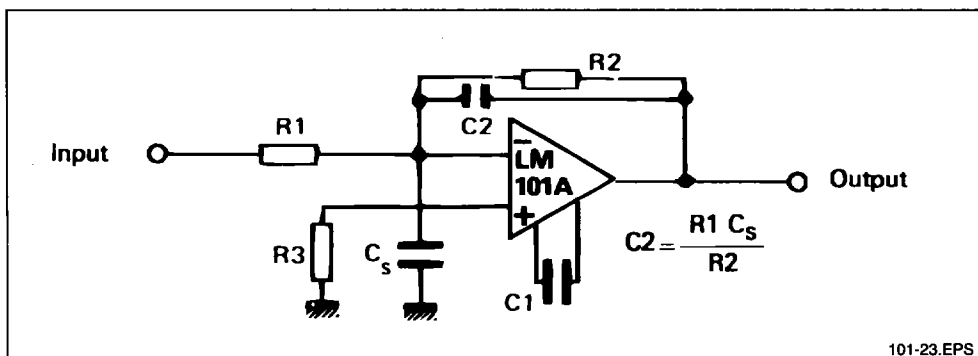


## ISOLATING LARGE CAPACITIVE LOADS

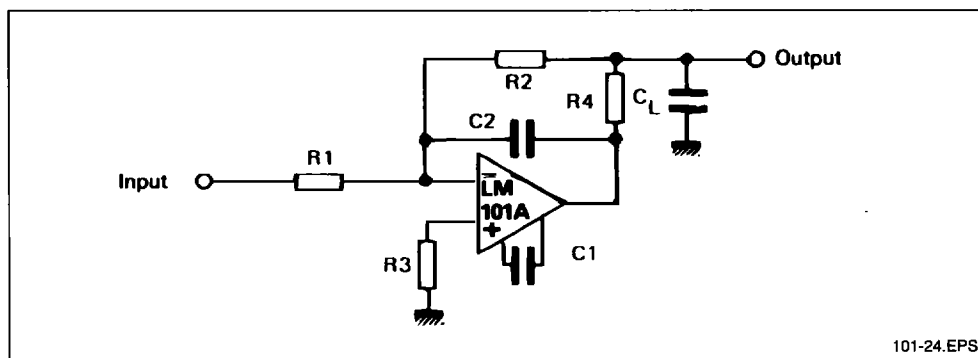


## TYPICAL APPLICATIONS

### SIMULATED INDUCTOR

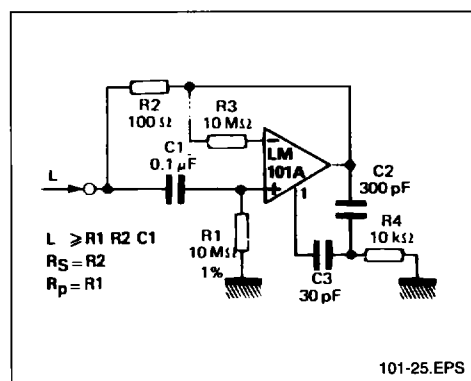


### FAST AMPLIFIER WITH HIGH INPUT IMPEDANCE

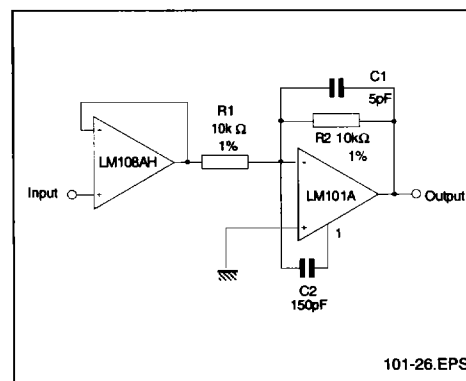




TYPICAL APPLICATIONS (continued)

VARIABLE CAPACITANCE MULTIPLIER

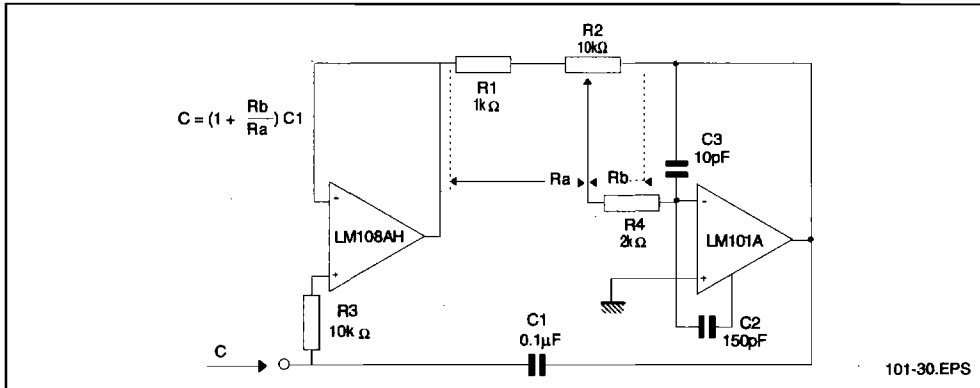

LOW FREQUENCY SQUARE WAVE GENERATOR

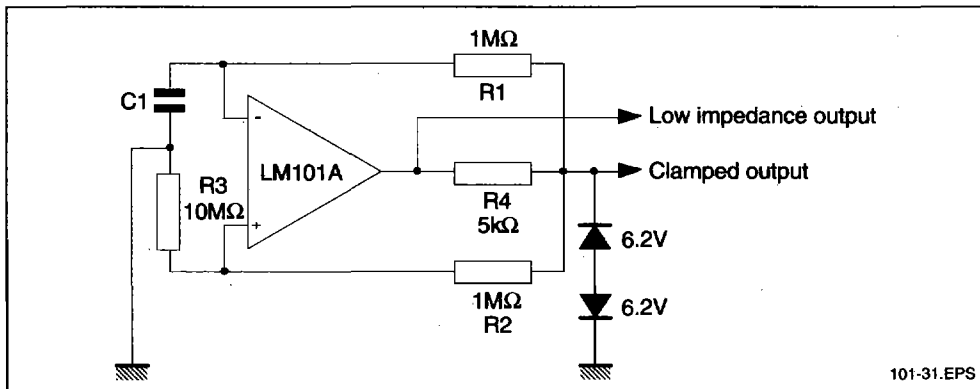

FAST HALF WAVE RECTIFIER

