




Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 481473

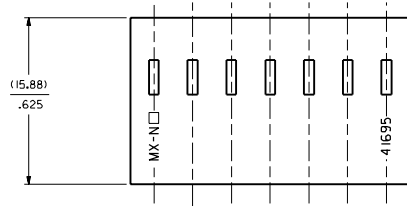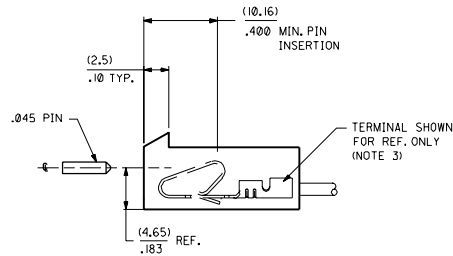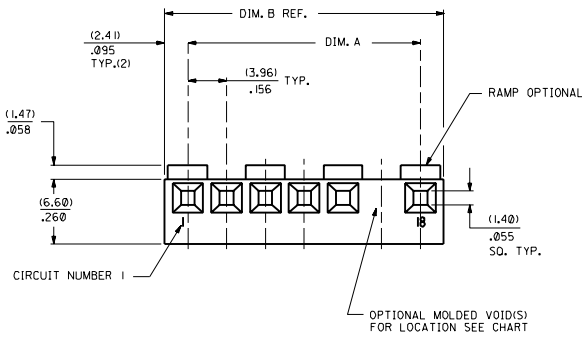

NOTES:

- MATERIAL: GLASS FILLED POLYESTER, 94V-0, MOLDED NATURAL.
- MATES WITH .156 CENTER HEADERS AND .045 SQ. OR RD. PIN.
- HOUSING ACCEPTS STANDARD TERMINAL NOS.:
 - 2478 (18-24 AWG) WITH (2.79)/.110 MAX. INSULATION DIA.
 - 2578 (22-26 AWG) WITH (1.65)/.065 MAX. INSULATION DIA. OR TRIFURCON TERMINAL NOS.:
 - 6438 (18-22 AWG) WITH (2.79)/.110 MAX. INSULATION DIA.
 - 6838 (18-24 AWG) WITH (2.79)/.110 MAX. INSULATION DIA.
 - 7258 (22-26 AWG) WITH (1.65)/.065 MAX. INSULATION DIA.
- BOW .006 IN/IN.
- THIS PART CONFORMS TO PRODUCT SPEC. 08-50 & 40-02.
- .005 MAX. FLASH ALLOWED ALONG DIMENSION B AND IN LOCKING WINDOW.

41695 - * - * N - ## - * *

COLOR CODE
N=MOLDED NATURAL
B=BLACK

OPTION CODE

CODE	RAMP	POLARIZE	PACKAGING	RIB	PEG
A	NO	NO	BULK PER PK-41695-001	NO	NO
B	YES	NO	BULK PER PK-41695-002	NO	NO
D	YES	YES	BULK PER PK-41695-003	NO	NO
E	YES	NO	BULK PER PK-41695-002	YES	NO
F	NO	NO	TBD	NO	YES
G	END RAMP ONLY	YES	BULK PER PK-41695-003	NO	NO

PEG LOCATION
A=CKT NO. 1
B=CKT NO 2 ETC

VOID CODE

BLANK=NO VOIDS
NO.-NO. CORRESPONDS TO CKT. NO. VOIDED
MULT. VOIDS=START WITH 51

NO. OF CKTS.

NO. OF CKTS	DIM. A	DIM. B
1	NOT AVAILABLE	
2	(3.96±.05)	(8.79)
3	(7.92±.05)	(12.75)
4	(11.89±.05)	(16.71)
5	(15.85±.08)	(20.67)
6	(19.81±.08)	(24.64)
7	(23.77±.10)	(28.60)
8	(27.74±.10)	(32.56)
9	(31.70±.10)	(36.53)
10	(35.66±.15)	(40.49)
11	(39.62±.15)	(44.45)
12	(43.59±.15)	(48.41)
13	(47.55±.15)	(52.37)
14	(51.51±.18)	(56.34)
15	(55.47±.18)	(60.30)
16	(59.44±.20)	(64.26)
17	(63.40±.20)	(68.22)
18	(67.36±.23)	(72.19)
19	(71.32±.20)	(76.15)
20	(75.28±.23)	(80.11)

REVISIONS

NO.	DATE	DESCRIPTION
1	04/05/86	REV. 1

MOLEX INCORPORATED

SEE CHART

SD-41695

