
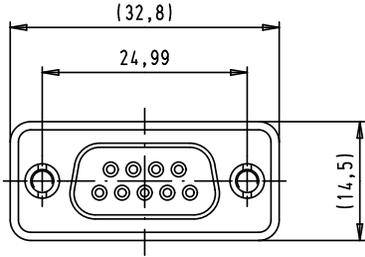




Alle Rechte vorbehalten/ All rights reserved

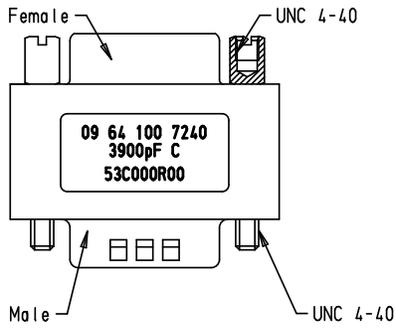

SPECIFICATIONS

Filter type	C
Capacitance	3900 pF±20%
Working voltage	100 V
Current rating	6,5 A

Minimum insertion loss

FREQUENCY (MHz)	ATTENUATION (dB)
1	1
5	6
10	11
50	25
100	35
500	35
1000	32

Note: Jack-screws are not pre-mounted to allow mounting from any ends

Mod.	Det.	Name	Detail.	Det.	Name	 All Dim. in mm Orig. Size DIN A 4	Male / Female D-Sub filter adapter, 9 poles, 3900 pF	Maßstab/ Scale 1,5:1
			03/09/07		JS			
34901	01/04/08	BB	Insp.					
34894	12/03/08	PK	Stand.					
	03/09/07	JS						
			HARTING EURL F-95972 Paris 			<b>TB 09 64 100 7240</b> Sub.	Blatt/ Page 1 / 1	