


DATE	SYM	REVISION RECORD	AUTH.	DR.	CK.
5/30/97	-	ISSUED		NT	MM
3/26/02	1	OTHERWISE SPECIFIED TOLERANCE ±.005 WAS ±.010		NT	DG
9/9/02	2	UPDATE 088 AND 063 PLATING		NT	DG

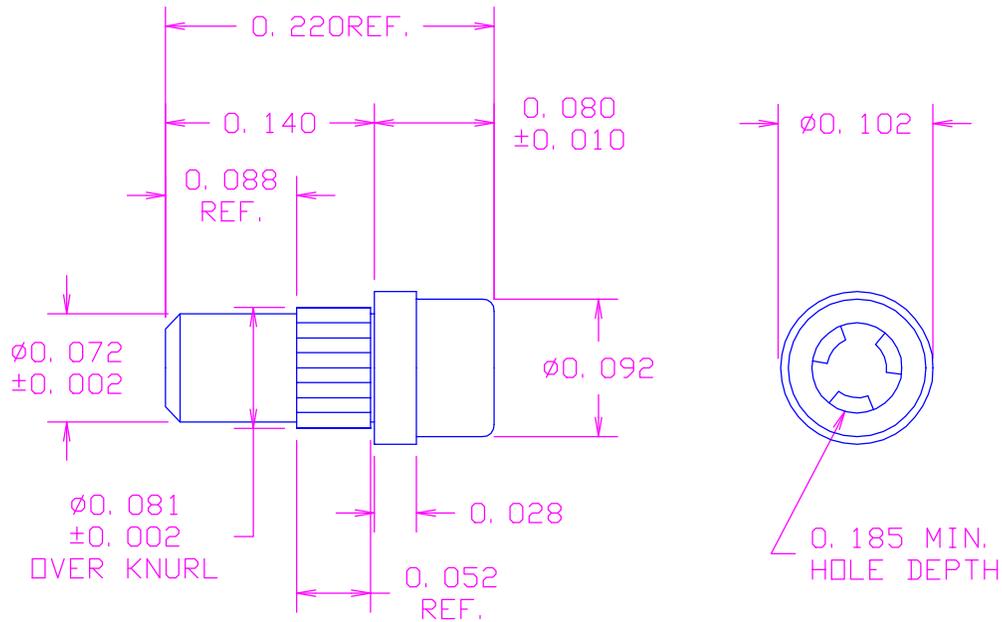

RECOMMENDED MOUNTING HOLE  $.076 \pm .002$  DIA. (48 DRILL)  
BOARD THICKNESS .062

FINISH CODE	COMPONENT	MATERIAL	FINISH
03	BODY	BRASS PER ASTM B16	.000010" GOLD PER ASTM B 488, TYPE II, CODE C OVER .0001" MIN. NICKEL PER AMS-QQ-N-290
	SPRING	BERYLLIUM COPPER PER ASTM B194	.000030" GOLD PER ASTM B488, TYPE II, CODE C OVER .0001" MIN. NICKEL PER AMS-QQ-N-290
088*	BODY	BRASS PER ASTM B16	.0002" BRIGHT 93%-7% TIN-LEAD OVER .0001" NICKEL
	SPRING	BERYLLIUM COPPER PER ASTM B194	.0002". BRIGHT 93%-7% TIN-LEAD, OVER .0001" NICKEL
063*	BODY	BRASS PER ASTM B16	.0002" BRIGHT 93%-7% TIN-LEAD, OVER .0001" NICKEL
	SPRING	BERYLLIUM COPPER PER ASTM B194	.000030" GOLD PER ASTM B 488, TYPE II, CODE C OVER .0001" MIN. NICKEL PER AMS-QQ-N-290

\*NOTE: 04 & 06 FINISH TO BE SHIPPED FROM INVENTORY UNTIL DEPLETED

ACTUAL SIZE



TOLERANCES (EXCEPT AS NOTED)		CONCORD ELECTRONICS CORPORATION	
DECIMAL $\pm .005$	P/N	SCALE	30 GREAT JONES ST. NEW YORK N. Y. 10012
FRACTIONAL $\pm 1/64$	TITLE P.C. JACK FOR .040 PIN		
ANGULAR $\pm$	DATE 4-17-97	DRAWING NUMBER 09-9081-1-XX	