

**MAXIM****1.2 $\mu$ A Max, Single/Dual/Quad,  
Single-Supply Op Amps****General Description**

The MAX406/MAX407/MAX409/MAX417-MAX419 are single, dual, and quad low-voltage, micropower, precision op amps designed for battery-operated systems. They feature a supply current of less than 1.2 $\mu$ A per amplifier that is relatively constant over the entire supply range, which represents a 15 to 20 times improvement over industry-standard micropower op amps. A unique output stage enables these op amps to operate at ultra-low supply current while maintaining linearity under loaded conditions. In addition, the output is capable of sourcing 1.8mA when powered by a 9V battery.

The common-mode input-voltage range extends from the negative rail to within 1.1V of the positive supply (for the singles, 1.2V for the duals and quads), and the output stage swings rail-to-rail. The entire family is designed to maintain good DC characteristics over the operating temperature range, minimizing the input referred errors.

The MAX406 is a single op amp with two modes of operation: compensated mode and uncompensated mode. Floating BW (pin 8) or connecting it to V- internally compensates the amplifier. In this mode, the MAX406 is unity-gain stable with a 5V/ms typical slew rate and an 8kHz gain bandwidth. Connecting BW to V+ puts the MAX406 into uncompensated mode with a 20V/ms typical slew rate and a 40kHz gain bandwidth ( $A_{vCL} \geq 2V/V$ ).

The dual MAX407 and quad MAX418 are internally compensated to be unity-gain stable. The MAX409/MAX417/MAX419 single/dual/quad op amps feature 150kHz typical bandwidth, 75V/ms slew rate, and stability for gains of 10V/V or greater.

**Applications**

Battery-Powered Systems  
Medical Instruments  
Electrometer Amplifiers  
Intrinsically Safe Systems  
Photodiode Pre-Amps  
pH Meters

**Features**

- ◆ 1.2 $\mu$ A Max Quiescent Current per Amplifier
- ◆ +2.5V to +10V Single-Supply Range
- ◆ 500 $\mu$ V Max Offset Voltage (MAX406A/MAX409A)
- ◆ < 0.1pA Typical Input Bias Current
- ◆ Output Swings Rail-to-Rail
- ◆ Input Voltage Range Includes Negative Rail


**Selection Table**

PART NUMBER	NO. OF AMPLIFIERS	GAIN-BW PRODUCT (kHz, TYP)	GAIN STABILITY (V/V)	OFFSET VOLTAGE (mV, MAX)
MAX406A	1	8*/40**	1*/2**	0.5
MAX406B	1	8*/40**	1*/2**	2.0
MAX407	2	8	1	3.0
MAX409A	1	150	10	0.5
MAX409B	1	150	10	2.0
MAX417	2	150	10	3.0
MAX418	4	8	1	4.0
MAX419	4	150	10	4.0

\* With BW pin open or connected to V-

\*\* With BW pin connected to V+

*Ordering Information appears at end of data sheet.*

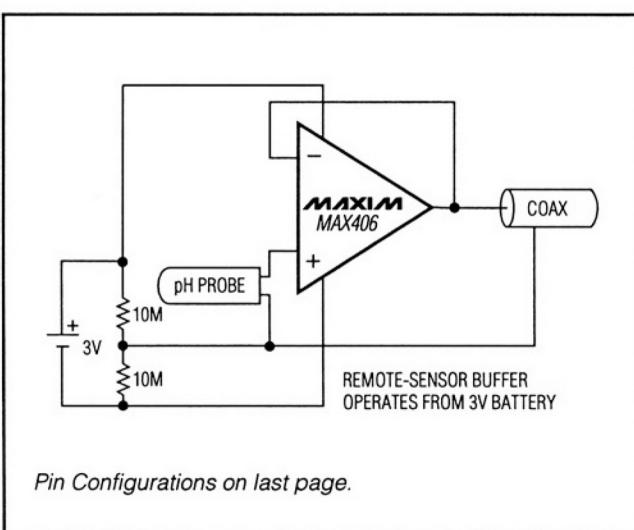**Typical Operating Circuit**

**MAX406/MAX407/MAX409/MAX417-MAX419**

**MAXIM**

Maxim Integrated Products 1

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim's website at [www.maxim-ic.com](http://www.maxim-ic.com).

# 1.2 $\mu$ A Max, Single/Dual/Quad, Single-Supply Op Amps

## ABSOLUTE MAXIMUM RATINGS

Total Supply Voltage (V+ to V-)	12V
Input Voltage	(V+ + 0.3V) to (V- - 0.3V)
Continuous Current	
All Input Pins	10mA
All Other Pins	50mA
Short-Circuit Duration	Continuous
Continuous Power Dissipation (TA = +70°C)	
8-Pin Plastic DIP (derate 9.09mW/°C above +70°C)	727mW
8-Pin SO (derate 5.88mW/°C above +70°C)	471mW
8-Pin CERDIP (derate 8.00mW/°C above +70°C)	640mW

14-Pin Plastic DIP (derate 10.00mW/°C above +70°C)	800mW
14-Pin SO (derate 8.33mW/°C above +70°C)	667mW
14-Pin CERDIP (derate 9.09mW/°C above +70°C)	727mW
Operating Temperature Ranges:	
MAX4_C	0°C to +70°C
MAX4_E	-40°C to +85°C
MAX4_M	-55°C to +125°C
Storage Temperature Range	-65°C to +160°C
Lead Temperature (soldering, 10sec)	+300°C

**Note 1:** Absolute Maximum Ratings do not apply to devices supplied in die or wafer form.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## ELECTRICAL CHARACTERISTICS

(V+ = 2.5V, V- = -2.5V, TA = +25°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Input Offset Voltage	V <sub>OS</sub>	MAX406A, MAX409A		0.25	0.5		mV
		MAX406B, MAX409B		0.75	2.0		
		MAX407, MAX417		1.0	3.0		
		MAX418, MAX419		1.0	4.0		
Input Bias Current	I <sub>B</sub>	V <sub>CM</sub> = 0V (Note 2)		<0.1	10.0		pA
Large-Signal Voltage Gain	AVOL	R <sub>L</sub> = 1M $\Omega$ , V <sub>OUT</sub> = $\pm$ 2V	MAX406A, MAX409A		200	1000	V/mV
			MAX406B, MAX407, MAX409B, MAX41_		100	1000	
		R <sub>L</sub> = 1M $\Omega$ , V <sub>OUT</sub> = $\pm$ 4V, V+ = 5V, V- = -5V			10	23	
Gain Bandwidth	GBW	MAX406A/B	Compensated mode		4	8	kHz
			Decompensated mode (Av = 2V/V)		20	40	
		MAX407, MAX418			4	8	
		MAX409A/B, MAX417, MAX419, AVCL $\geq$ 10V/V			80	150	
Input Common-Mode Range	CMR	MAX406A/B, MAX409A/B		V-	V+ - 1.1		V
		MAX407, MAX41_		V-	V+ - 1.2		
Output Voltage Swing	V <sub>O</sub>	R <sub>L</sub> = 1M $\Omega$			$\pm$ 2.47	$\pm$ 2.49	V
Common-Mode Rejection Ratio	CMRR	(Note 3)	MAX406A, MAX409A	70			dB
			MAX406B, MAX407, MAX409B, MAX41_	60			
Power-Supply Rejection Ratio	PSRR	V <sub>IN</sub> = 0V, V+ = 2.5V to 7.5V	MAX406A, MAX409A	50			$\mu$ V/V
			MAX406B, MAX409B	150			
			MAX407, MAX41_	200			

# 1.2 $\mu$ A Max, Single/Dual/Quad, Single-Supply Op Amps

## ELECTRICAL CHARACTERISTICS (continued)

(V<sub>+</sub> = 2.5V, V<sub>-</sub> = -2.5V, T<sub>A</sub> = +25°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Slew Rate	SR	MAX406A/B	Compensated mode	3	5	V/ms
			Decompensated mode (Av = 2V/V)	12	20	
		MAX407, MAX418		3	5	
		MAX409A/B, MAX417, MAX419 AvCL $\geq$ 10V/V		40	80	
Supply Current Per Amplifier	I <sub>SY</sub>			1.0	1.2	$\mu$ A
Output Sink Current	I <sub>OSINK</sub>	V <sub>OUT</sub> = 0V	100	200		$\mu$ A
Output Source Current	I <sub>OSOURCE</sub>	V <sub>OUT</sub> = 0V	300	600		$\mu$ A
Supply Voltage (V <sub>+</sub> to V <sub>-</sub> )	V <sub>S</sub>		2.5	10.0		V
Input Noise Voltage	e <sub>n</sub>	f <sub>o</sub> = 1kHz		150		nV/ $\sqrt$ Hz
		f <sub>o</sub> = 0.1Hz to 10Hz		6		$\mu$ V <sub>p-p</sub>

## ELECTRICAL CHARACTERISTICS

(V<sub>+</sub> = 2.5V, V<sub>-</sub> = -2.5V, T<sub>A</sub> = 0°C to +70°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Input Offset Voltage	V <sub>OS</sub>	MAX406A, MAX409A		0.95		mV
		MAX406B, MAX409B		3.00		
		MAX407		4.00		
		MAX41 <sub>-</sub>		5.00		
Offset-Voltage Tempco	T <sub>CVOS</sub>	MAX406A, MAX409A, 100% drift tested	2	10		$\mu$ V/°C
Input Bias Current	I <sub>B</sub>	V <sub>CM</sub> = 0V		20		pA
Large-Signal Voltage Gain	A <sub>VL</sub>	R <sub>L</sub> = 1M $\Omega$ , V <sub>OUT</sub> = $\pm$ 2V	MAX406A, MAX409A	100		V/mV
			MAX406B	50		
		R <sub>L</sub> = 1M $\Omega$ , (V <sub>OUT</sub> = $\pm$ 4V, V <sub>+</sub> = 5V, V <sub>-</sub> = -5V)		10		
Output Voltage Swing	V <sub>O</sub>	R <sub>L</sub> = 1M $\Omega$		$\pm$ 2.45		V
Common-Mode Rejection Ratio	CMRR	(Note 3)	MAX406A, MAX409A	66		dB
			MAX406B, MAX407 MAX409B, MAX41 <sub>-</sub>	60		
Power-Supply Rejection Ratio	PSRR	V <sub>IN</sub> = 0V, V <sub>+</sub> = 2.5V to 7.5V	MAX406A, MAX409A	150		$\mu$ V/V
			MAX406B, MAX409B	450		
			MAX407, MAX41 <sub>-</sub>	800		

# 1.2 $\mu$ A Max, Single/Dual/Quad, Single-Supply Op Amps

## ELECTRICAL CHARACTERISTICS (continued)

(V<sub>+</sub> = 2.5V, V<sub>-</sub> = -2.5V, T<sub>A</sub> = 0°C to +70°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Supply Current Per Amplifier	I <sub>SY</sub>			1.6		$\mu$ A
Output Sink Current	I <sub>OSINK</sub>	V <sub>OUT</sub> = 0V	50			$\mu$ A
Output Source Current	I <sub>OSOURCE</sub>	V <sub>OUT</sub> = 0V	250			$\mu$ A

## ELECTRICAL CHARACTERISTICS

(V<sub>+</sub> = 2.5V, V<sub>-</sub> = -2.5V, T<sub>A</sub> = -40°C to +85°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Input Offset Voltage	V <sub>OS</sub>	MAX406A, MAX409A		1.10		mV
		MAX406B, MAX409B		3.00		
		MAX407, MAX417		4.00		
		MAX418, MAX419		5.00		
Offset-Voltage Tempco	T <sub>CVOS</sub>	MAX406A, MAX409A, 100% drift tested		10		$\mu$ V/°C
Input Bias Current	I <sub>B</sub>	V <sub>CM</sub> = 0V		50		pA
Large-Signal Voltage Gain	A <sub>VOL</sub>	R <sub>L</sub> = 1M $\Omega$ , V <sub>OUT</sub> = $\pm$ 2V	MAX406A, MAX409A	50		V/mV
			MAX406B, MAX407, MAX409B, MAX41 <sub>1</sub>	25		
		R <sub>L</sub> = 1M $\Omega$ , V <sub>OUT</sub> = $\pm$ 4V, V <sub>+</sub> = 5V, V <sub>-</sub> = -5V		10		
Output Voltage Swing	V <sub>O</sub>	R <sub>L</sub> = 1M $\Omega$		$\pm$ 2.45		V
Common-Mode Rejection Ratio	CMRR	(Note 3)	MAX406A, MAX409A	66		dB
			MAX406B, MAX407, MAX409B, MAX41 <sub>1</sub>	60		
Power-Supply Rejection Ratio	PSRR	V <sub>IN</sub> = 0V, V <sub>+</sub> = 2.5V to 7.5V	MAX406A, MAX409A	150		$\mu$ V/V
			MAX406B, MAX409B	450		
			MAX407, MAX41 <sub>1</sub>	800		
Supply Current Per Amplifier	I <sub>SY</sub>			1.7		$\mu$ A
Output Sink Current	I <sub>OSINK</sub>	V <sub>OUT</sub> = 0V	40			$\mu$ A
Output Source Current	I <sub>OSOURCE</sub>	V <sub>OUT</sub> = 0V	250			$\mu$ A

# 1.2 $\mu$ A Max, Single/Dual/Quad, Single-Supply Op Amps

## ELECTRICAL CHARACTERISTICS

(V<sub>+</sub> = 2.5V, V<sub>-</sub> = -2.5V, T<sub>A</sub> = -55°C to +125°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Input Offset Voltage	V <sub>OS</sub>	MAX406A, MAX409A		1.5		mV
		MAX406B, MAX409B		4.0		
		MAX407, MAX417		5.0		
		MAX418, MAX419		6.0		
Offset-Voltage Tempco	T <sub>CYOS</sub>	MAX406A, MAX409A, 100% drift tested		10		$\mu$ V/°C
Input Bias Current	I <sub>B</sub>	V <sub>CM</sub> = 0V		1.0		nA
Large-Signal Voltage Gain	A <sub>VOL</sub>	$R_L = 1\text{M}\Omega$ , V <sub>OUT</sub> = $\pm 2\text{V}$	MAX406A, MAX409A	10		V/mV
			MAX406B, MAX407, MAX409B, MAX417	5		
		R <sub>L</sub> = 1M $\Omega$ , V <sub>OUT</sub> = $\pm 4\text{V}$ , V <sub>+</sub> = 5V, V <sub>-</sub> = -5V		10		
Output Voltage Swing	V <sub>O</sub>	R <sub>L</sub> = 1M $\Omega$		±2.45		V
Common-Mode Rejection Ratio	CMRR	(Note 3)	MAX406A, MAX409A	66		dB
			MAX406B, MAX407, MAX409B, MAX417	60		
Power-Supply Rejection Ratio	PSRR	V <sub>IN</sub> = 0V, V <sub>+</sub> = 2.5V to 7.5V	MAX406A, MAX409A	150		$\mu$ V/V
			MAX406B, MAX409B	450		
			MAX407, MAX417	800		
Supply Current Per Amplifier	I <sub>SY</sub>			2.0		$\mu$ A
Output Sink Current	I <sub>OSINK</sub>	V <sub>OUT</sub> = 0V	20			$\mu$ A
Output Source Current	I <sub>OSOURCE</sub>	V <sub>OUT</sub> = 0V	200			$\mu$ A

**Note 2:** Production-automated test equipment cannot resolve input bias currents below 1pA. Lab equipment has shown the MAX407, MAX417 typical input bias currents below 0.1pA.









**Note 3:** MAX406A/MAX409A: V<sub>CM</sub> = V<sub>-</sub> to (V<sub>+</sub> - 1.1V). MAX407, MAX417 V<sub>CM</sub> = V<sub>-</sub> to (V<sub>+</sub> - 1.2V).

**MAX406/MAX407/MAX409/MAX417-MAX419**

# 1.2 $\mu$ A Max, Single/Dual/Quad, Single-Supply Op Amps

## Typical Operating Characteristics

(V+ 2.5V, V- = -2.5V,  $T_A$  = +25°C, unless otherwise noted.)

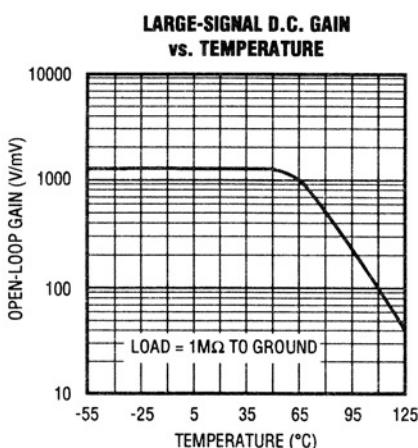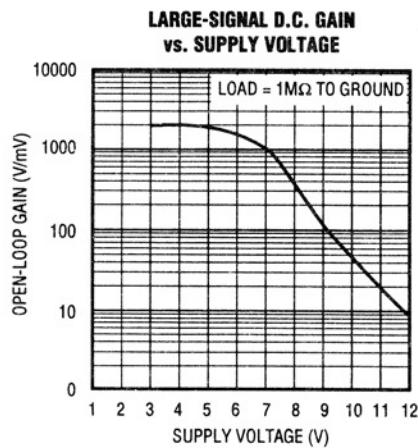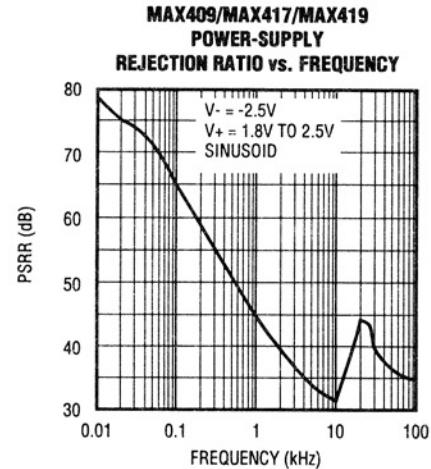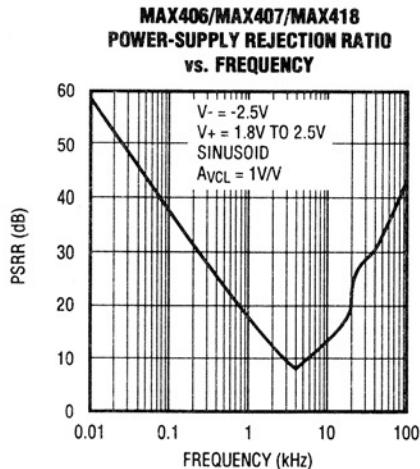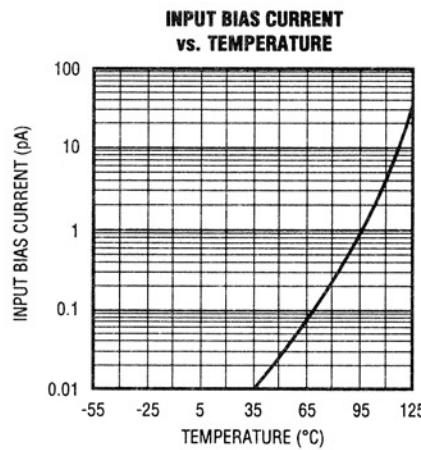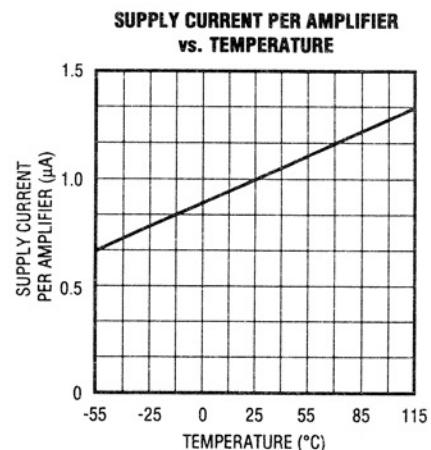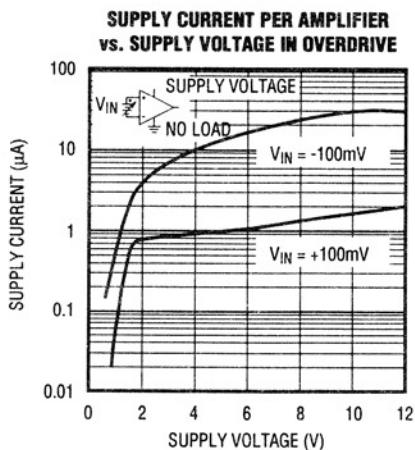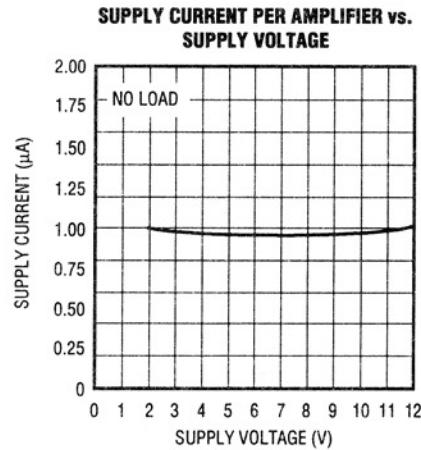


# 1.2 $\mu$ A Max, Single/Dual/Quad, Single-Supply Op Amps


## Typical Operating Characteristics (continued)

(V<sub>+</sub> = 2.5V, V<sub>-</sub> = -2.5V, T<sub>A</sub> = +25°C, unless otherwise noted).






**MAX406/MAX407/MAX409/MAX417-MAX419**

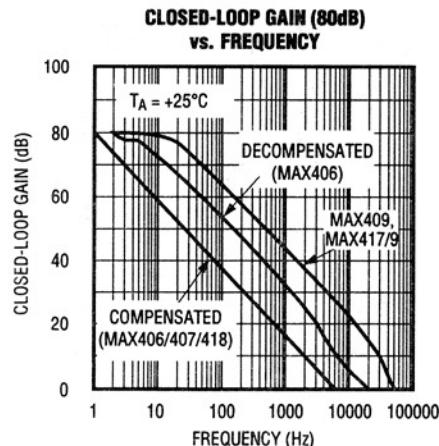


MAX409, MAX417, MAX419  
OPEN-LOOP GAIN AND PHASE  
vs. FREQUENCY

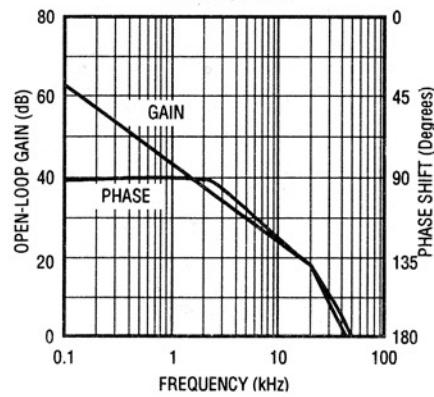


MAXIMUM OUTPUT VOLTAGE  
vs. LOAD RESISTANCE  
(SINGLE SUPPLY)

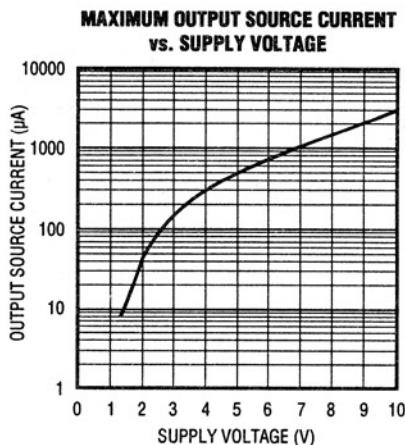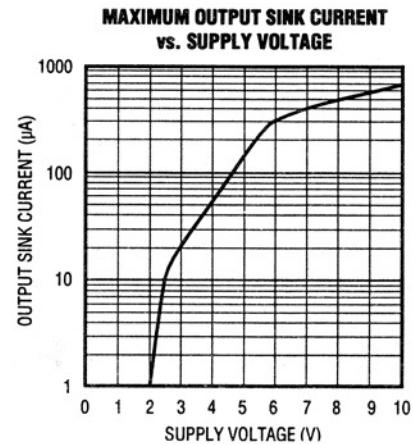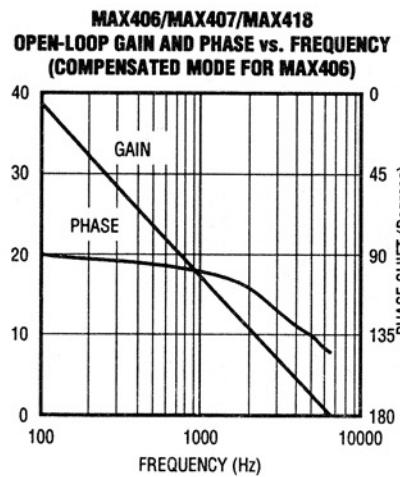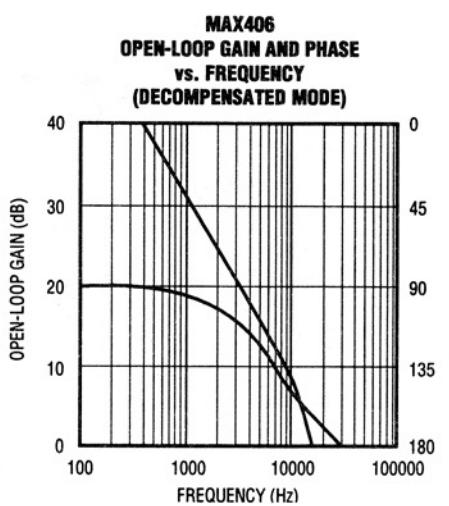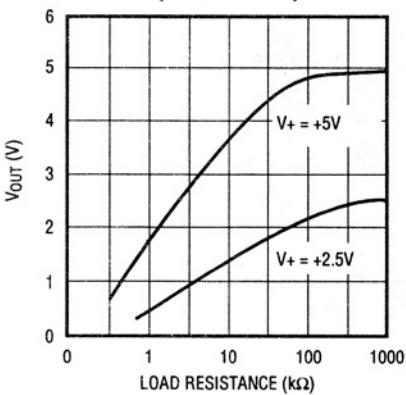

MAX406, MAX407, MAX418  
PERCENT OVERRUSH vs. CAPACITIVE LOAD  
(COMPENSATED MODE)

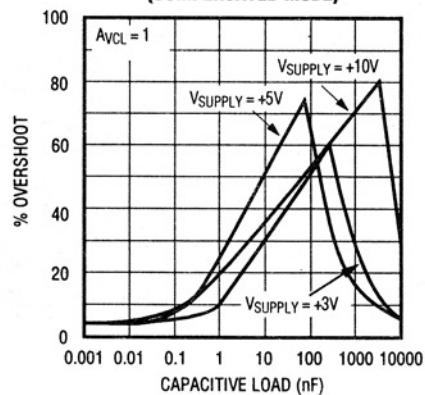

MAX406  
PERCENT OVERRUSH vs. CAPACITIVE  
LOAD (DECOMPENSATED MODE)

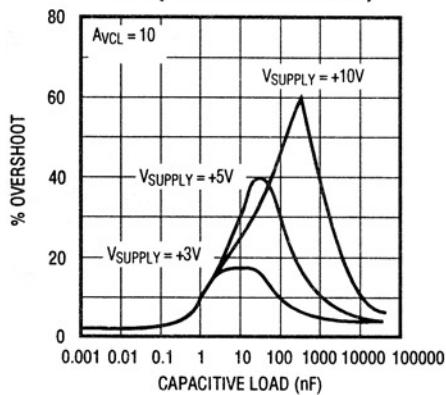


## 1.2 $\mu$ A Max, Single/Dual/Quad, Single-Supply Op Amps

### Typical Operating Characteristics


( $T_A = +25^\circ\text{C}$ , unless otherwise noted).

**MAX406/MAX407/MAX418  
LARGE-SIGNAL TRANSIENT RESPONSE**

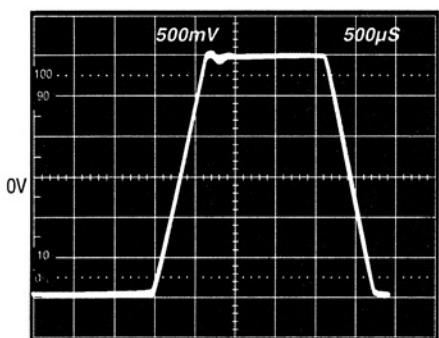


NONINVERTING,  $A_{VCL} = 1\text{V/V}$ ,  
 $V_{SUPPLY} = \pm 2.5\text{V}$ , LOAD =  $1\text{M}\Omega \parallel 250\text{pF}$

**MAX406/MAX407/MAX418  
LARGE-SIGNAL TRANSIENT RESPONSE**

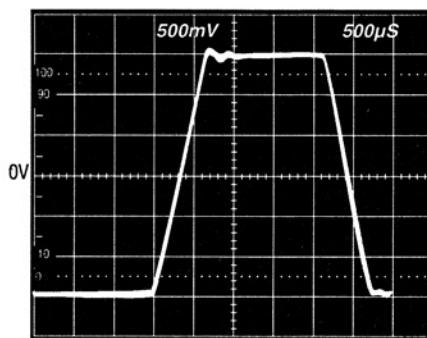


NONINVERTING,  $A_{VCL} = 1\text{V/V}$ ,  
 $V_{SUPPLY} = \pm 2.5\text{V}$ , LOAD =  $1\text{M}\Omega \parallel 1000\text{pF}$

**MAX406 (DECOMPENSATED MODE)  
LARGE-SIGNAL TRANSIENT RESPONSE**

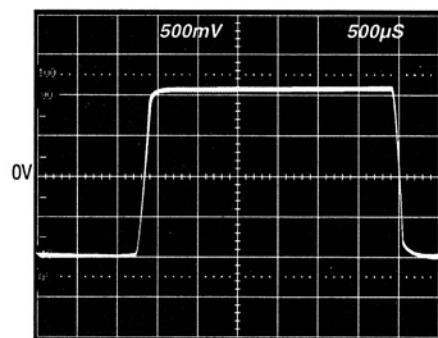


$V_{SUPPLY} = \pm 2.5\text{V}$ ,  $A_{VCL} = 2\text{V/V}$ ,  
LOAD =  $1\text{M}\Omega \parallel 15\text{pF}$

**MAX406/MAX407/MAX418  
SMALL-SIGNAL TRANSIENT RESPONSE**

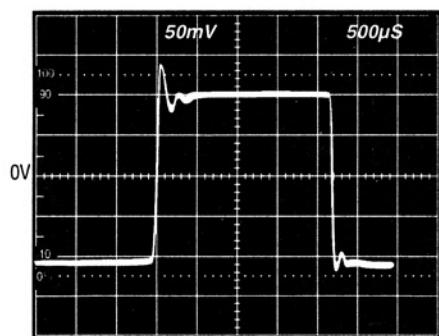


NONINVERTING,  $A_{VCL} = 1\text{V/V}$ ,  
 $V_{SUPPLY} = \pm 2.5\text{V}$ , LOAD =  $1\text{M}\Omega \parallel 250\text{pF}$

**MAX406/MAX407/MAX418  
SMALL-SIGNAL TRANSIENT RESPONSE**

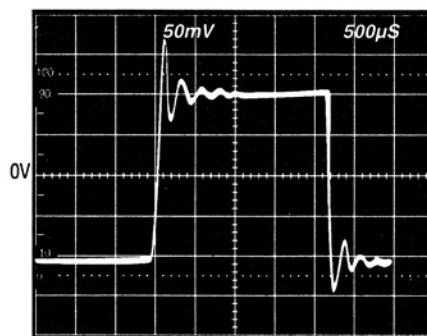


NONINVERTING,  $A_{VCL} = 1\text{V/V}$ ,  
 $V_{SUPPLY} = \pm 2.5\text{V}$ , LOAD =  $1\text{M}\Omega \parallel 1000\text{pF}$

**MAX406 (DECOMPENSATED MODE)  
SMALL-SIGNAL TRANSIENT RESPONSE**

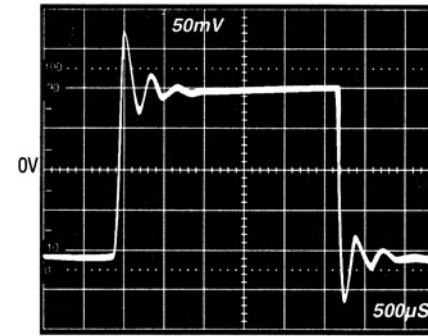


$A_{VCL} = 10\text{V/V}$ ,  
 $V_{SUPPLY} = \pm 2.5\text{V}$ , LOAD =  $1\text{M}\Omega \parallel 1000\text{pF}$

**MAX409/MAX417/MAX419  
LARGE-SIGNAL TRANSIENT RESPONSE**

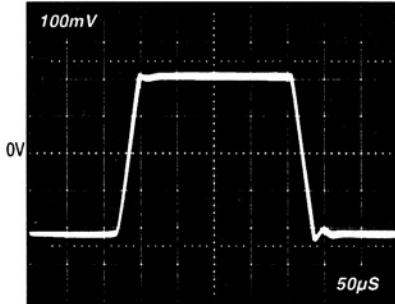

$A_V = 10\text{V/V}$ ,  $V_{SUPPLY} = \pm 2.5\text{V}$ , LOAD =  $1\text{M}\Omega \parallel 10\text{pF}$


**MAX409/MAX417/MAX419  
SMALL-SIGNAL TRANSIENT RESPONSE**

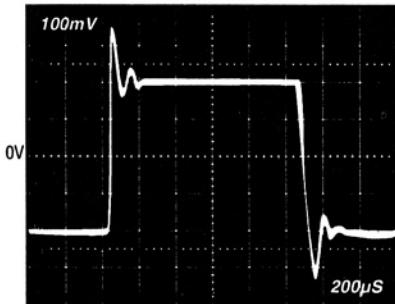


$A_V = 10\text{V/V}$ ,  $V_{SUPPLY} = \pm 2.5\text{V}$ , LOAD =  $1\text{M}\Omega \parallel 110\text{pF}$

# **1.2 $\mu$ A Max, Single/Dual/Quad, Single-Supply Op Amps**

## **Typical Operating Characteristics (continued)**

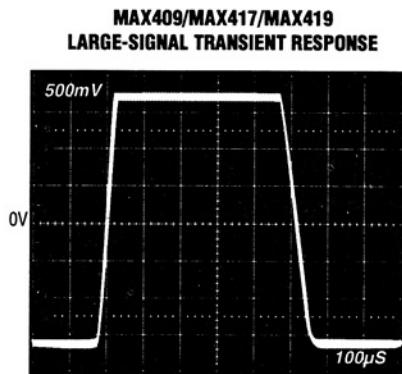

$A_v = 10V/V$ ,  $V_{SUPPLY} = \pm 2.5V$ , LOAD =  $1M\Omega \parallel 10pF$

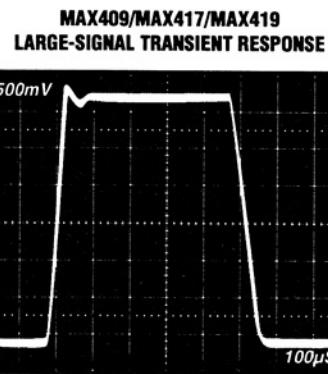

$A_v = 10V/V$ ,  $V_{SUPPLY} = \pm 2.5V$ , LOAD =  $1M\Omega \parallel 110pF$

## **Pin Description**

<b>MAX406 PIN</b>	<b>MAX407 MAX417 PIN</b>	<b>MAX409 PIN</b>	<b>MAX418 MAX419 PIN</b>	<b>NAME</b>	<b>FUNCTION</b>
1		1		NULL	Nulling. Connect to one end of 100k potentiometer for offset voltage trimming. See Figure 1.
	1		1	OUTA	Amplifier Output A
2		2		IN-	Inverting Input
	2		2	INA-	Inverting Input A
3		3		IN+	Noninverting Input
	3		3	INA+	Noninverting Input A
4	4	4	11	V-	Negative Power-Supply Pin. Connect to (-) terminal of power supply or ground.
5		5		NULL	Nulling. Connect to one end of 100k potentiometer for offset voltage trimming. Connect wiper to V+. See Figure 1.
	5		5	INB+	Noninverting Input B
6		6		OUT	Amplifier Output
	6		6	INB-	Inverting Input B
7	8	7	4	V+	Positive Supply Pin. Connect to (+) terminal of power supply.
	7		7	OUTB	Amplifier Output B
8				BW	Bandwidth Selection Pin. Leave floating or connect to V- for unity-gain stability (compensated mode) or connect to V+ (decompensated mode).
		8		I.C.	Internal Connection. Make no connection to this pin.
		8	OUTC		Amplifier Output C
		9	INC-		Inverting Input C
		10	INC+		Noninverting Input C
		12	IND+		Noninverting Input D
		13	IND-		Inverting Input D
		14	OUTD		Amplifier Output D

# 1.2 $\mu$ A Max, Single/Dual/Quad, Single-Supply Op Amps

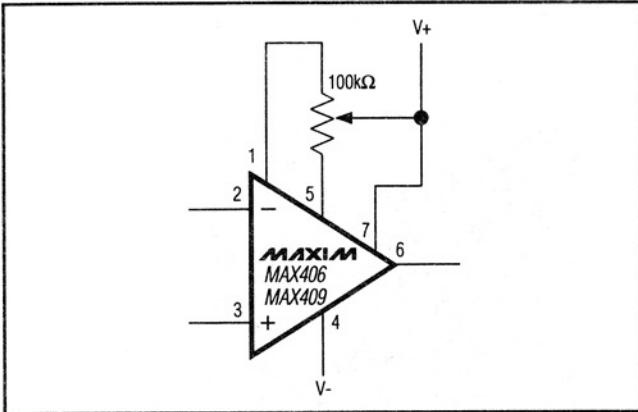


Figure 1. Offset-Voltage Adjustment

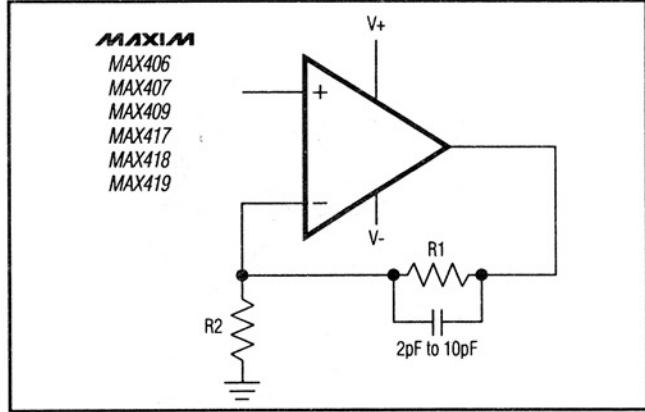


Figure 2. Compensation for Feedback Node Capacitance

## Applications Information

### Trimming Voltage Offset

The MAX406/MAX409's typical input offset voltage is between 0.25mV and 0.75mV, depending on the grade. If the application requires additional offset adjustment, connect a 100kΩ trim pot between pins 1, 5, and 7 for the MAX406/MAX409 (Figure 1). The dual and quad amplifiers' offset voltages are not adjustable.

### Input Overdrive vs. Supply Current

The supply current of the MAX406/MAX407/MAX409/MAX417-MAX419 remains relatively constant over the supply range if the amplifier output is not overdriven to the negative supply rail. For example, when connecting the amplifier as a comparator and applying a -100mV input overdrive, supply current rises above the 1 $\mu$ A per amplifier typical value and varies with supply voltage. (see Supply Current vs. Supply Voltage in Overdrive, *Typical Operating Characteristics*).

### Total Supply-Voltage Considerations

Although the MAX406/MAX407/MAX409/MAX417-MAX419 can operate with supply voltages between 2.5V and 10V, best performance is achieved with supply voltages below 7V. The Open-Loop Gain vs. Supply Voltage graph in the *Typical Operating Characteristics* shows how open-loop gain is reduced at voltages that exceed 7V.

### Bandwidth

The MAX407/MAX418 are internally compensated for stable unity-gain operation, with an 8kHz typical gain bandwidth. The MAX409/MAX417/MAX419 have a 150kHz typical gain-bandwidth product and are stable with a gain of 10V/V or greater.

The MAX406 operates in one of two modes. Floating BW or connecting BW to V- internally compensates the amplifier for stable unity-gain operation. Connecting BW to V+ reduces the compensation and allows the amplifier to be used at higher speeds. When operating in uncompensated mode, the MAX406 is stable for closed loop gains  $\geq 2V/V$ , with a 40kHz typical gain bandwidth and a 20V/ms typical slew rate.

### Stability

Unlike other industry-standard micropower CMOS op amps, the MAX406/MAX407/MAX409/MAX417-MAX419 maintain stability in their minimum gain configuration while driving heavy capacitive loads, as demonstrated in the Percent Overshoot vs. Capacitive Load graph in the *Typical Operating Characteristics*.

Although this product family is primarily designed for low-frequency applications, good layout is extremely important. This is because low power requirements demand high-impedance circuits. A 10MΩ impedance and a 1pF capacitance will provide a breakpoint at approximately 16kHz, which is near the amplifier's bandwidth. The layout should minimize stray capacitance at the amplifier's inputs. However, some stray capacitance may be unavoidable, and it may be necessary to add a 2pF to 10pF capacitor across the feedback resistor as shown in Figure 2. Select the smallest capacitor value that insures stability.

## Typical Application Circuits

### Buffered pH Probe Allows Low-Cost Cable

The MAX406 has less than 20pA input leakage current over the commercial temperature range, and is typically less than 100fA at +25°C. These characteristics are ideal for buffering pH probes and a variety of other high output impedance chemical sensors. The circuit in

# **1.2 $\mu$ A Max, Single/Dual/Quad, Single-Supply Op Amps**

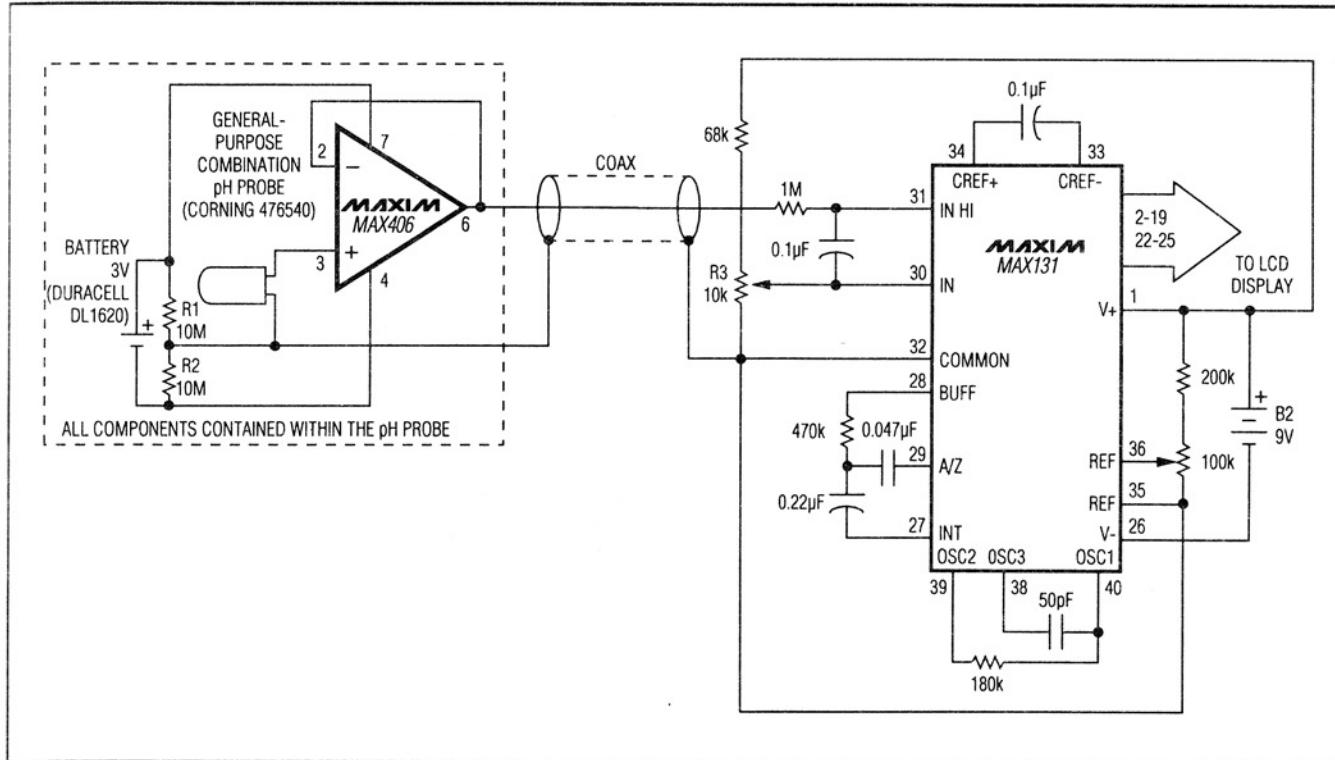


Figure 3. Buffered pH Probe Allows Low-Cost Cable

Figure 3 eliminates expensive low-leakage cables that often connect pH probes to meters. A MAX406 and a lithium battery are included in the probe housing. A conventional low-cost coaxial cable carries the buffered pH signal to the MAX131 A/D converter. In most cases, the probe assembly's battery life exceeds the functional life of the probe itself.

## **Micropower, 4-Channel Simultaneous Sample-and-Hold**

Switch leakage and buffer input bias current in sample and hold circuits limit performance by discharging the signal voltage on the hold capacitor (an effect called "droop"). The 2pA typical room temperature leakage current for the MAX327 and 100fA typical input bias current for the MAX407 translates to a typical droop rate of 200 $\mu$ V/sec for Figure 4's circuit. Another advantage is low power consumption. The MAX327 guarantees no more than 250 $\mu$ A supply current with  $\pm 15$ V supplies, but most of this is drawn by internal logic-level translators. By using rail-to-rail logic (CD4000, 74C00, or 74HC00 families) to drive IN1-IN3, the level

translators are turned off and the supply current falls well below 1 $\mu$ A when the switches are off. This technique turns any Maxim switch or multiplexer into an ultra low-power device. Figure 4's circuit typically draws 6 $\mu$ A with 0V to 9V logic input levels.

### Remotely Powered Sensor Amp

Figure 5 shows a simple 2-wire current transmitter that uses no power at the transmitting end except from the transmitted signal itself. At the transmitter, a 0V to 1V input drives both a MAX406 and an NPN transistor connected as a voltage-controlled current sink. The 0mA to 2mA output is sent through a twisted pair to the receiver and develops a voltage across the receiver sense resistor R2. The resulting sense voltage is buffered by another MAX406, producing a 0V to 1V ground-referenced output signal. R1 and R2 should be well matched. The MAX406's supply current is added to the 0mA to 2mA signal, resulting in a  $500\mu\text{V}$  offset at the output. This offset, in addition to the MAX406's input offset, varies with temperature.

## 1.2 $\mu$ A Max, Single/Dual/Quad, Single-Supply Op Amps

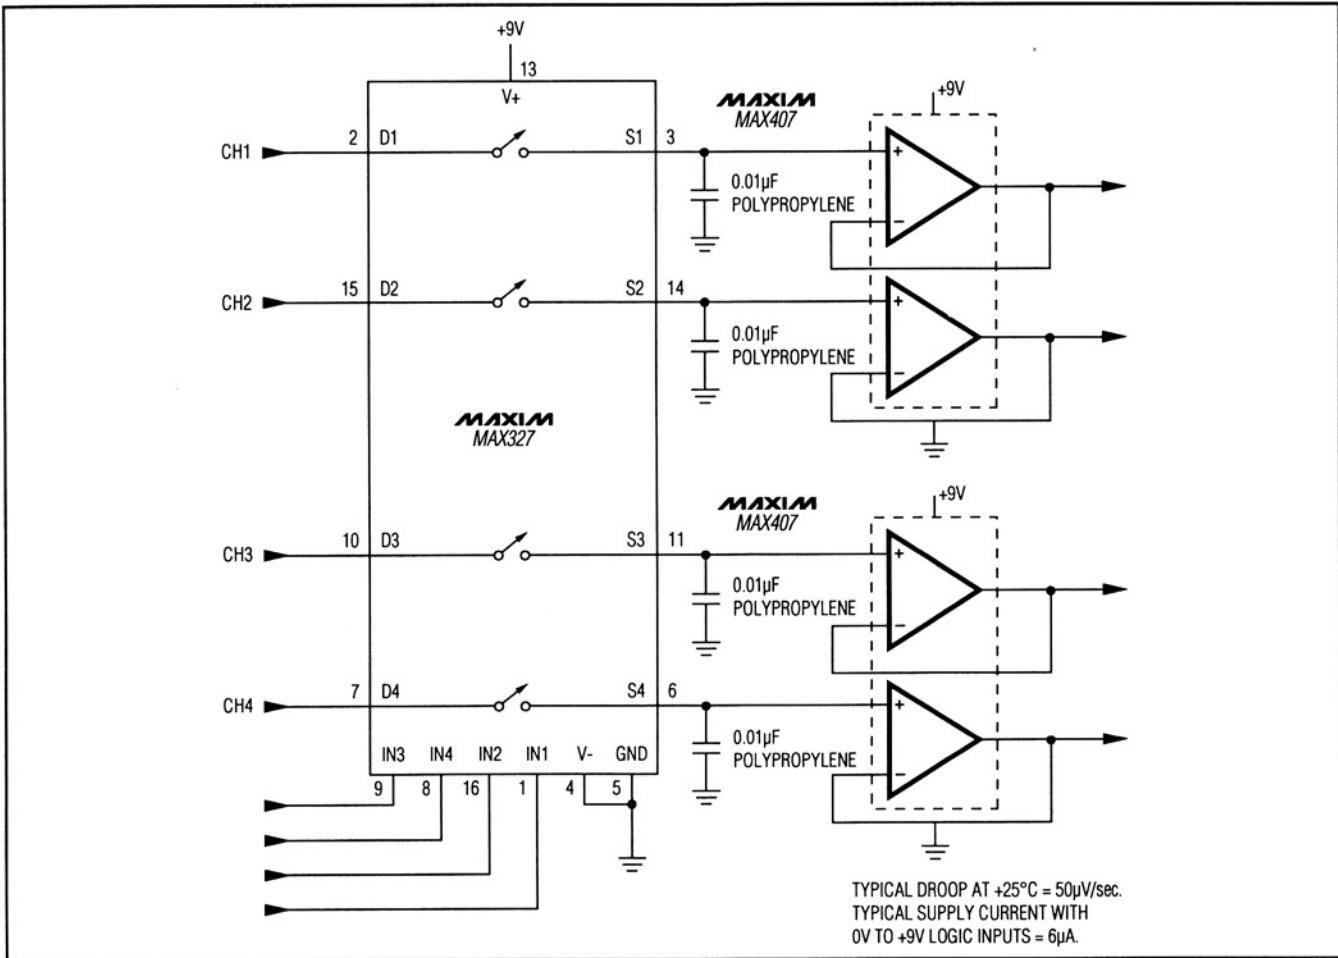


Figure 4. Micropower, 4-Channel, Simultaneous Sample-and-Hold

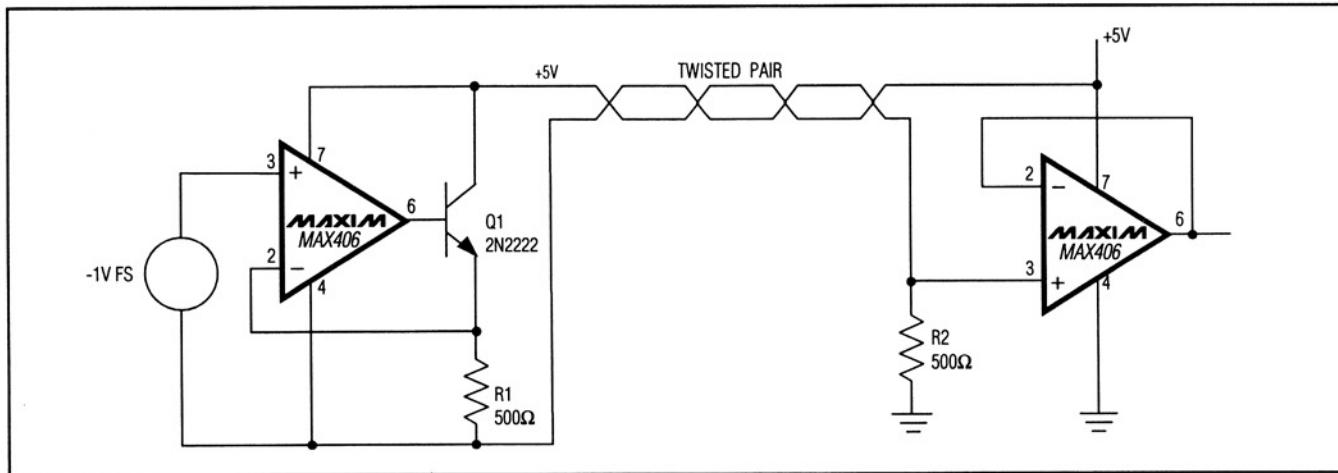


Figure 5. Remotely Powered Sensor Amp

# 1.2 $\mu$ A Max, Single/Dual/Quad, Single-Supply Op Amps

## Negative Reference Circuit Draws Less Than 11 $\mu$ A

By biasing a low-power, low-dropout reference (MAX872) so it sits in the feedback path of a MAX406, a precise -2.50V reference is produced that requires no external components, as shown in Figure 6. This is superior to a standard inverting configuration, which requires two resistors that can add errors.

Other advantages of this circuit are:

1. Maximum current drain is 11 $\mu$ A.
2. The output load is driven by the op amp so there is no degradation of voltage due to load regulation.
3. No compensation is needed for load capacitance.

The supplies do not have to be carefully regulated. The positive supply can be as low as 1.1V and the negative supply can be as little as 2.7V.

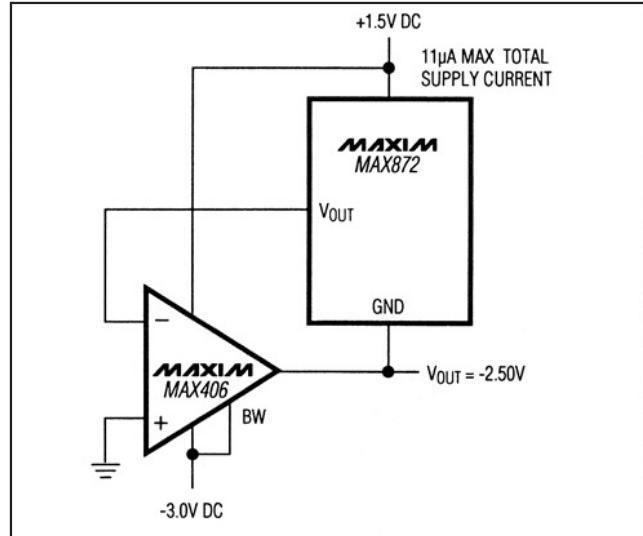


Figure 6. Micropower, Low-Dropout Negative Reference

## Ordering Information

PART	TEMP RANGE	PIN-PACKAGE
MAX406ACPA	0°C to +70°C	8 Plastic DIP
MAX406BCPA	0°C to +70°C	8 Plastic DIP
MAX406ACSA	0°C to +70°C	8 SO
MAX406BCSA	0°C to +70°C	8 SO
MAX406C/D	0°C to +70°C	Dice*
MAX406AEPA	-40°C to +85°C	8 Plastic DIP
MAX406BEPA	-40°C to +85°C	8 Plastic DIP
MAX406AES	-40°C to +85°C	8 SO
MAX406BESA	-40°C to +85°C	8 SO
MAX406AMJA	-55°C to +125°C	8 CERDIP
MAX406BMJA	-55°C to +125°C	8 CERDIP
<b>MAX407CPA</b>	0°C to +70°C	8 Plastic DIP
MAX407CSA	0°C to +70°C	8 SO
MAX407C/D	0°C to +70°C	Dice*
MAX407EPA	-40°C to +85°C	8 Plastic DIP
MAX407ESA	-40°C to +85°C	8 SO
MAX407MJA	-55°C to +125°C	8 CERDIP
<b>MAX409ACPA</b>	0°C to +70°C	8 Plastic DIP
MAX409BCPA	0°C to +70°C	8 Plastic DIP
MAX409ACSA	0°C to +70°C	8 SO
MAX409BCSA	0°C to +70°C	8 SO
MAX409BC/D	0°C to +70°C	Dice*
MAX409AEPA	-40°C to +85°C	8 Plastic DIP
MAX409BEPA	-40°C to +85°C	8 Plastic DIP


PART	TEMP RANGE	PIN-PACKAGE
MAX409AES	-40°C to +85°C	8 SO
MAX409BESA	-40°C to +85°C	8 SO
MAX409AMJA	-55°C to +125°C	8 CERDIP
MAX409BMJA	-55°C to +125°C	8 CERDIP
<b>MAX417CPA</b>	0°C to +70°C	8 Plastic DIP
MAX417CSA	0°C to +70°C	8 SO
MAX417C/D	0°C to +70°C	Dice*
MAX417EPA	-40°C to +85°C	8 Plastic DIP
MAX417ESA	-40°C to +85°C	8 SO
MAX417MJA	-55°C to +125°C	8 CERDIP
<b>MAX418CPD</b>	0°C to +70°C	14 Plastic DIP
MAX418CSD	0°C to +70°C	14 SO
MAX418EPD	0°C to +70°C	14 Plastic DIP
MAX418ESD	0°C to +70°C	14 SO
MAX418MJD	-55°C to +125°C	14 CERDIP
MAX418MSD/PR	-55°C to +125°C	14 SO
MAX418MSD/PR-T	-55°C to +125°C	14 SO
<b>MAX419CPD</b>	0°C to +70°C	14 Plastic DIP
MAX419CSD	0°C to +70°C	14 SO
MAX419EPD	-40°C to +85°C	14 Plastic DIP
MAX419ESD	-40°C to +85°C	14 SO
MAX419MJD	-55°C to +125°C	14 CERDIP

\*Dice are specified at +25°C, DC parameters only.


\*\*Contact factory for availability.

## 1.2 $\mu$ A Max, Single/Dual/Quad, Single-Supply Op Amps


### Pin Configurations

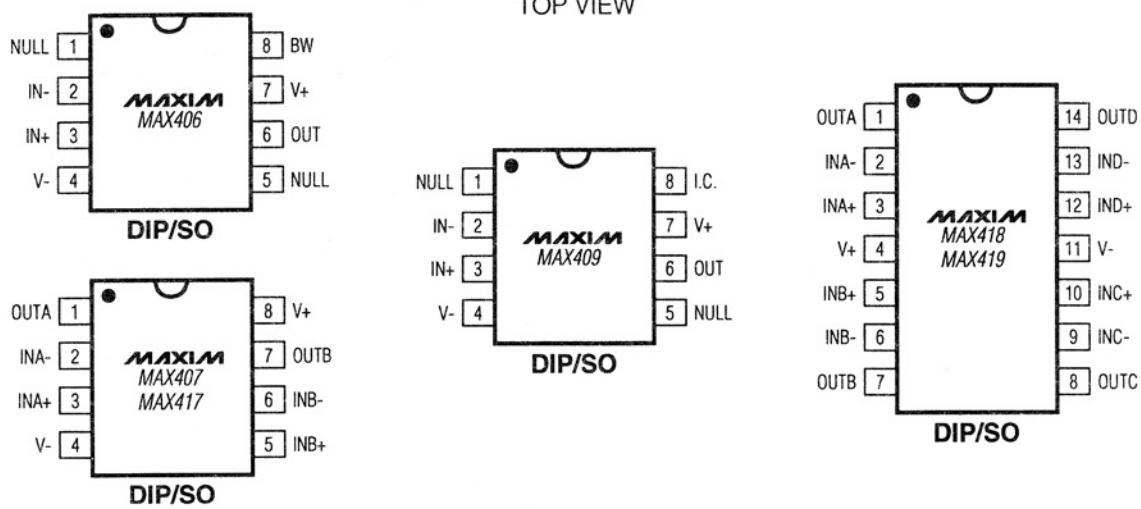

### Chip Topographies

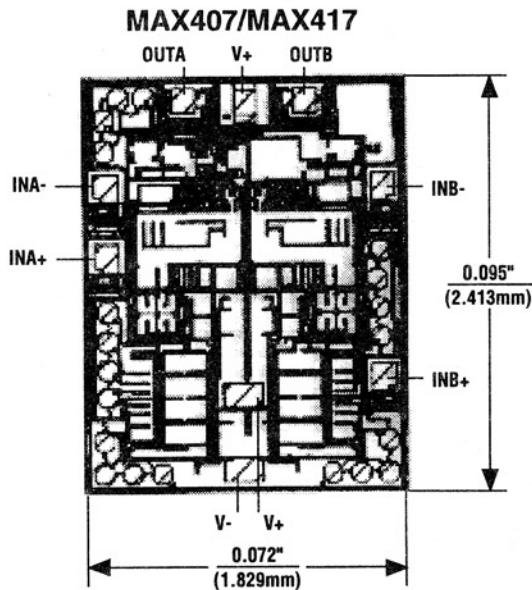

TRANSISTOR COUNT: 98;  
SUBSTRATE CONNECTED TO V+.

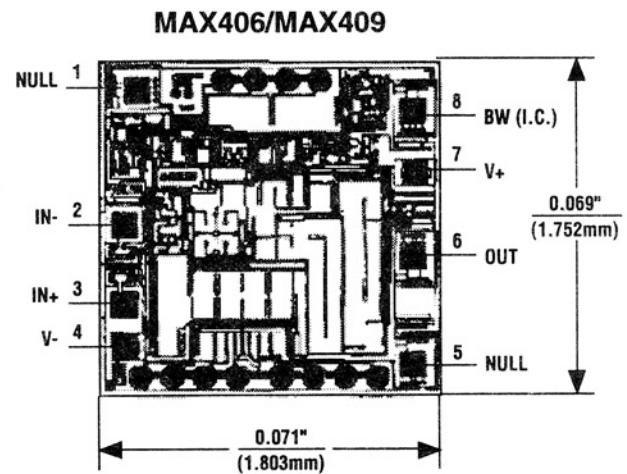

TRANSISTOR COUNT: 148;  
SUBSTRATE CONNECTED TO V+.

# **1.2 $\mu$ A Max, Single/Dual/Quad, Single-Supply Op Amps**

## **Package Information**

For the latest package outline information and land patterns, go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages).

PACKAGE TYPE	PACKAGE CODE	DOCUMENT NO.
8 Plastic DIP	P8-1	<a href="#">21-0043</a>
8 SO	S8-2	<a href="#">21-0041</a>
8 CERDIP	J8-2	<a href="#">21-0045</a>
14 Plastic DIP	P14-3	<a href="#">21-0043</a>
14 SO	S14-1	<a href="#">21-0041</a>
14 CERDIP	J14-3	<a href="#">21-0045</a>

# 1.2 $\mu$ A Max, Single/Dual/Quad, Single-Supply Op Amps

## Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
3	10/08	Added information for rugged plastic part	13
4	4/09	Updated <i>Ordering Information</i>	1, 13, 15

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

16 **Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600**

© 2009 Maxim Integrated Products

Maxim is a registered trademark of Maxim Integrated Products, Inc.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Maxim Integrated](#):

[MAX406AEPA+](#) [MAX406ACSA+](#) [MAX406ACSA+T](#) [MAX406AES+](#) [MAX406AES+](#) [MAX406ACPA+](#)  
[MAX406ACPA](#)