

Number of contacts

9–25



IP 67, turned solder cups, with front plastic mounting plate

D-Sub - W

| Identification                             | No. of contacts | Part No.                            |                         |
|--------------------------------------------|-----------------|-------------------------------------|-------------------------|
|                                            |                 | S4 <sup>1)</sup>                    |                         |
| Male connector<br>metal shell with dimples | 9<br>15<br>25   | 09 67 709<br>09 67 715<br>09 67 725 | . 615<br>. 615<br>. 615 |
| Please insert digit<br>for flange thread   |                 |                                     |                         |
| 4-40 UNC ▶                                 | 7               |                                     |                         |
| M3 ▶                                       | 9               |                                     |                         |
| Female connector<br>metal shell            | 9<br>15<br>25   | 09 67 709<br>09 67 715<br>09 67 725 | . 715<br>. 715<br>. 715 |
| Please insert digit<br>for flange thread   |                 |                                     |                         |
| 4-40 UNC ▶                                 | 6               |                                     |                         |
| M3 ▶                                       | 8               |                                     |                         |

<sup>1)</sup> S4: ≥ 0.76 µm Au (30 µinch)

Number of contacts

9-25



IP 67, turned solder cups, with front plastic mounting plate


Identification

Drawing

Dimensions in mm


## Male connector

9 – 25 contacts

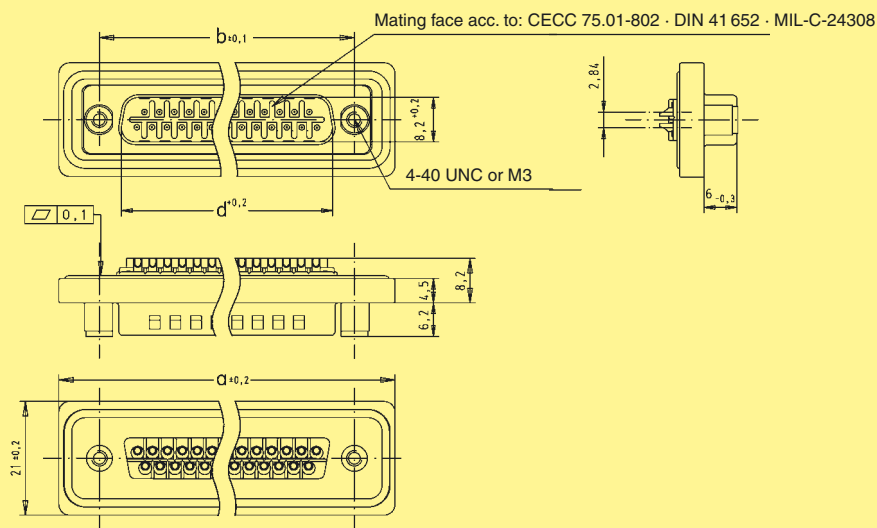


## Female connector

9 – 25 contacts

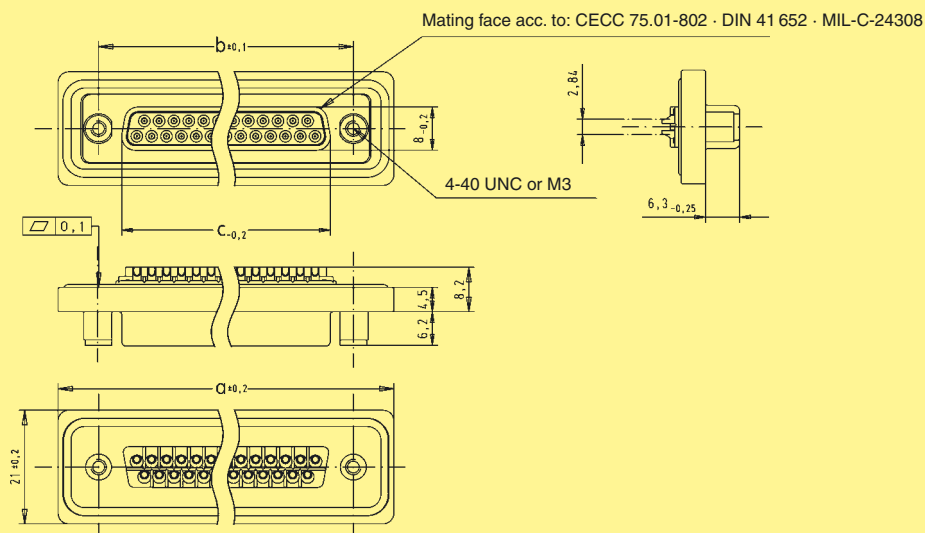

|    | a    | b     | c    | d    |
|----|------|-------|------|------|
| 9  | 40.0 | 25.00 | 16.4 | 16.9 |
| 15 | 48.3 | 33.30 | 24.7 | 25.2 |
| 25 | 62.0 | 47.04 | 38.5 | 38.9 |

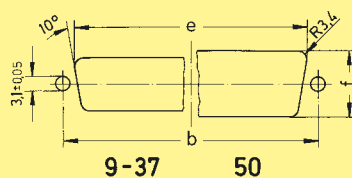Panel cut out  
for front/rear mountValues are taken from the  
CECC 75 301-802

Front mount

|    | b $\pm 0.13$ | e $\pm 0.2$ | f $\pm 0.2$ |
|----|--------------|-------------|-------------|
| 9  | 25.0         | 22.2        | 12.3        |
| 15 | 33.3         | 30.5        | 12.3        |
| 25 | 47.0         | 44.3        | 12.3        |

Rear mount

|    | b $\pm 0.13$ | e $\pm 0.2$ | f $\pm 0.2$ |
|----|--------------|-------------|-------------|
| 9  | 25.0         | 20.5        | 11.4        |
| 15 | 33.3         | 28.8        | 11.4        |
| 25 | 47.0         | 42.5        | 11.4        |