


SUBMINIATURE Switch

E61-E64 Series

PRODUCT DISCONTINUED

PLEASE REFER TO OUR SUBMINIATURE DB SERIES:

[HTTP://CHERRYSWITCHES.COM/US/PRODUCT/SUBMINIATURE-DB/](http://cherryswitches.com/us/product/subminiature-db/)

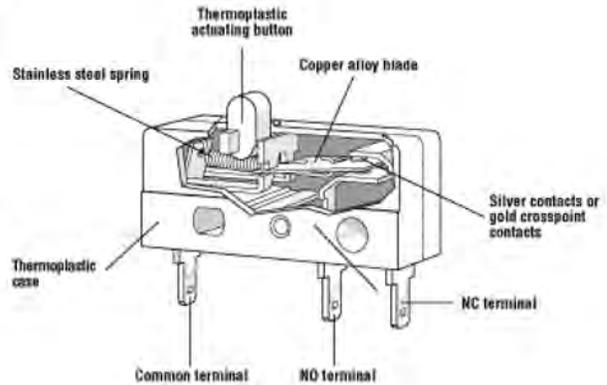

Features

- 4 Contact Ratings
- Long life coil spring mechanism
- High temperature versions optional
- Four terminal types
- RoHS compliant

Electrical Ratings and Operating Life

Switch Series	According to UL 1054	
	Nominal Load	Electrical Life at Rated Load
E61	5A 125/250 VAC 5A, 30 VDC optional	6000
E62	10.1A 125/250 VAC; 1/4HP 125VAC	6000
E63	0.1A 125VAC 0.25A, 30 VDC optional	6000*
E64	13A, 125VAC; 10.1A 250VAC	6000

* Indicates 100K UL Life Available. Contact Factory

Technical Specifications

Temperature Rating:	-40°C to 85°C 130°C optional using thermoset material. Special part number required.
Flammability Rating	UL94HB
Mounting:	Recommended screw: #2-56 round head Recommended torque: 2 inch lbs. max
UL File Number:	E23301

Specifications subject to change

Material Specifications

Case:	Thermoplastic
Actuating Button:	Thermoplastic Acetal
Terminal:	Silver Plated Commercial Bronze
Moving Blade:	Beryllium Copper
Spring:	Stainless Steel
Contacts:	E61, E62, E64: Fine Silver E63: Gold Crosspoint
Auxiliary Actuator:	Cold Rolled Steel (Nickel-Plated)



SUBMINIATURE

E61-E64 Series

Commonly Stocked Distributor Items / Preferred Part Numbers

Item Number	Actuator	UL Rating	Maximum Operating Force (grams)	Maximum Pretravel inches (mm)	Operating Point* inches (mm)	Minimum Overtravel inches (mm)	Max. Movement Differential inches (mm)	Terminal Style	Actuation Length**
0E6100AD		5A 125/250VAC	30	0.020 (0.76)	0.330 +/- 0.015 (8.38 +/- 0.38)	0.040 (1.06)	0.04 (0.10)	0.093" QC	N/A
0E6100HD		5A 125/250VAC	27	0.144 (3.66)	0.350 +/- 0.030 (8.89 +/- 0.76)	0.040 (1.02)	0.20 (0.51)	0.093" QC	0.271 (6.88)
0E6100SD		5A 125/250VAC	30	0.114 (2.90)	0.571 +/- .055 (14.50 +/- 1.4)	0.019 (4.83)	0.015 (0.381)	0.093" QC	0.203 (5.16)
0E6110AD		5A 125/250VAC	90	0.020 (0.76)	0.330 +/- 0.015 (8.38 +/- 0.38)	0.040 (1.06)	0.04 (0.10)	Short Solder	N/A
0E6110HD		5A 125/250VAC	27	0.144 (3.66)	0.350 +/- 0.030 (8.89 +/- 0.76)	0.040 (1.02)	0.20 (0.51)	Short Solder	0.271 (6.88)
0E6110SD		5A 125/250VAC	30	0.114 (2.90)	0.571 +/- .055 (14.50 +/- 1.4)	0.019 (4.83)	0.015 (0.381)	Short Solder	0.203 (5.16)
0E6130AD		5A 125/250VAC	90	0.020 (0.76)	0.330 +/- 0.015 (8.38 +/- 0.38)	0.040 (1.06)	0.04 (0.10)	0.110" QC	N/A
0E6130HD		5A 125/250VAC	30	0.114 (2.90)	0.571 +/- .055 (14.50 +/- 1.4)	0.019 (4.83)	0.015 (0.381)	0.110" QC	0.203 (5.16)
0E6150HD		5A 125/250VAC	9	0.416 (10.57)	0.250 +/- 0.175 (6.89 +/- 0.76)	0.050 (1.27)	0.050 (1.27)	0.093" QC	0.396 (10.09)
0E6150SD		5A 125/250VAC	9	0.416 (10.57)	0.250 +/- 0.175 (6.89 +/- 0.76)	0.050 (1.27)	0.050 (1.27)	Short Solder	0.396 (10.09)
0E6200AD		10 1A, 125/250VAC; 1/4HP 125VAC	212	0.020 (0.76)	0.330 +/- 0.015 (8.38 +/- 0.38)	0.040 (1.06)	0.04 (0.10)	0.093" QC	N/A
0E6200HD		10 1A, 125/250VAC; 1/4HP 125VAC	56	0.144 (3.66)	0.350 +/- 0.030 (8.89 +/- 0.76)	0.040 (1.02)	0.20 (0.51)	0.093" QC	0.271 (6.88)
0E6200SD		10 1A, 125/250VAC; 1/4HP 125VAC	65	0.114 (2.90)	0.571 +/- .055 (14.50 +/- 1.4)	0.019 (4.83)	0.015 (0.381)	0.093" QC	0.203 (5.16)
0E6210AD		10 1A, 125/250VAC; 1/4HP 125VAC	212	0.020 (0.76)	0.330 +/- 0.015 (8.38 +/- 0.38)	0.040 (1.06)	0.04 (0.10)	Short Solder	N/A
0E6210HD		10 1A, 125/250VAC; 1/4HP 125VAC	56	0.144 (3.66)	0.350 +/- 0.030 (8.89 +/- 0.76)	0.040 (1.02)	0.20 (0.51)	Short Solder	0.271 (6.88)
0E6210SD		10 1A, 125/250VAC; 1/4HP 125VAC	65	0.114 (2.90)	0.571 +/- .055 (14.50 +/- 1.4)	0.019 (4.83)	0.015 (0.381)	Short Solder	0.203 (5.16)
0E6230AD		10 1A, 125/250VAC; 1/4HP 125VAC	212	0.020 (0.76)	0.330 +/- 0.015 (8.38 +/- 0.38)	0.040 (1.06)	0.04 (0.10)	0.110" QC	N/A
0E6230HD		10 1A, 125/250VAC; 1/4HP 125VAC	65	0.114 (2.90)	0.571 +/- .055 (14.50 +/- 1.4)	0.019 (4.83)	0.015 (0.381)	0.110" QC	0.203 (5.16)
0E6250AD		10 1A, 125/250VAC; 1/4HP 125VAC	212	0.020 (0.76)	0.330 +/- 0.015 (8.38 +/- 0.38)	0.040 (1.06)	0.04 (0.10)	PCB	N/A
0E6250HD		10 1A, 125/250VAC; 1/4HP 125VAC	33	0.379 (9.63)	0.470 +/- 0.158 (14.48 +/- 0.76)	0.040 (1.02)	0.050 (1.27)	0.093" QC	0.328 (8.28)
0E6260HD		10 1A, 125/250VAC; 1/4HP 125VAC	20	0.416 (10.57)	0.250 +/- 0.175 (6.89 +/- 0.76)	0.050 (1.27)	0.050 (1.27)	Short Solder	0.271 (6.88)
0E6300AD		0 1A, 125VAC	90	0.020 (0.76)	0.330 +/- 0.015 (8.38 +/- 0.38)	0.040 (1.06)	0.04 (0.10)	0.093" QC	N/A
0E6300HD		0 1A, 125VAC	27	0.144 (3.66)	0.350 +/- 0.030 (8.89 +/- 0.76)	0.040 (1.02)	0.20 (0.51)	0.093" QC	0.190 (4.90)
0E6300SD		0 1A, 125VAC	30	0.114 (2.90)	0.571 +/- .055 (14.50 +/- 1.4)	0.019 (4.83)	0.015 (0.381)	0.093" QC	0.203 (5.16)
0E6310HD		0 1A, 125VAC	27	0.144 (3.66)	0.350 +/- 0.030 (8.89 +/- 0.76)	0.040 (1.02)	0.20 (0.51)	Short Solder	0.271 (6.88)
0E6310SD		0 1A, 125VAC	30	0.114 (2.90)	0.571 +/- .055 (14.50 +/- 1.4)	0.019 (4.83)	0.015 (0.381)	Short Solder	0.203 (5.16)
0E6330HD		0 1A, 125VAC	30	0.114 (2.90)	0.571 +/- .055 (14.50 +/- 1.4)	0.019 (4.83)	0.015 (0.381)	0.093" QC	0.203 (5.16)
0E6350HD		0 1A, 125VAC	9	0.416 (10.57)	0.250 +/- 0.175 (6.89 +/- 0.76)	0.050 (1.27)	0.050 (1.27)	0.093" QC	0.396 (10.09)



* Measured using Reference Line shown on drawing on following page.

** Actuator tolerance of +/- 0.031" (0.79 mm)


SUBMINIATURE

E61-E64 Series

Dimensions inches

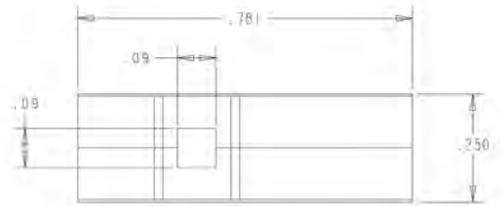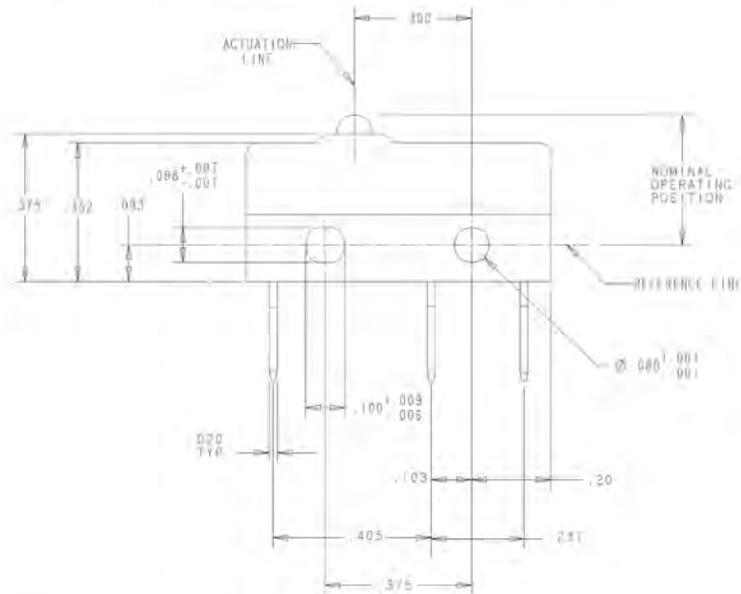

PCB Terminal Footprint

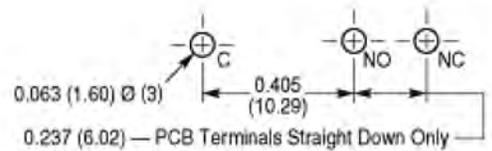

Terminal Options inches

<p>-00A 0.093" QC</p>	<p>-10A Short Solder[^]</p>	<p>-30A 0.110" QC</p>	<p>-50A PCB[^]</p>



[^] Not available on E64 series

- Consult factory for switch part numbers if ordering pcb terminals

Terminal Mating Connectors:

- 0.093" QC terminals mate with AMP part number 60432-1
- 0.110" QC terminals mate with AMP part number 42068-1

Actuators

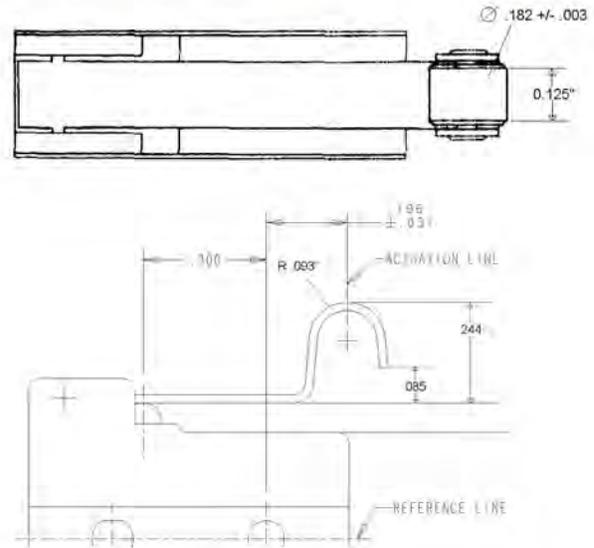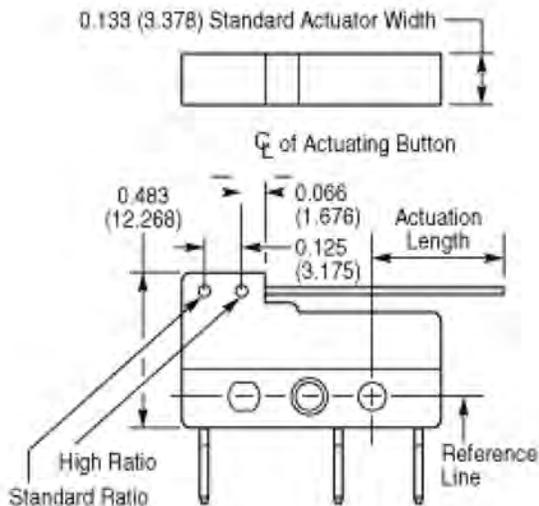

Ordering Information

1. Select the contact rating prefix you need (E61-E64).
2. Combine the prefix with the corresponding terminal configuration. For example part number E63-50H will provide you with a gold crosspoint subminiature switch with 0.093" QC terminals and a straight lever with a 0.396" actuation length
3. To order a normally open version simply 'add 1' to the suffix to obtain E63-01H and normally closed 'add 2' for part number E63-02H.
4. To order a E62-50K with 0.110" QC terminals, "add" the new terminal code (-30) to the part number – E62-80K will be the resulting part number for a subminiature switch with 0.110" QC terminals and a roller lever with a 0.326" actuation length.

Contact

Call, fax or visit our
 Website for more information.

ZF Electronics Corporation
 11200 88th Avenue
 Pleasant Prairie, WI 53158

Phone: 262.942.6500
 Web: www.cherrycorp.com
 Email: cep_sales@zf.com
 Fax: 262.942.6566

The manufacturer accepts no
 liability for errors or non-availability,
 and reserves the right to change
 specifications without prior notice.

Technical data relates to product
 specifications only. Features may
 differ from those described. Only
 drawings combined with product
 specifications shall be deemed
 binding.

© 2007 ZF Electronics Corporation

Last Updated: 061212