

General Specifications

Electrical Capacity (Resistive Load)

For MRX:	2A @ 125V AC or 1A @ 30V DC
For MRY:	For MRY106G: 0.4VA maximum @ 28V AC/DC maximum (Applicable Range 0.1mA ~ 0.1A @ 20mV ~ 28V) Note: See Supplement Index to find explanation of operating range. For all other MRY models: 3A @ 125V AC or 2A @ 30V DC
For MRT:	For MRT22: 10A @ 125V AC or 4A @ 30V DC For MRT23: 5A @ 125V AC or 3A @ 30V DC

Other Ratings

Contact Resistance:	10 milliohms maximum for MRX, MRY, & MRT; 20 milliohms maximum for MRY106G
Insulation Resistance:	100 megohms minimum @ 500V DC for MRX & MRY 200 megohms minimum @ 500V DC for MRT
Dielectric Strength:	1,000V AC minimum for 1 minute minimum
Mechanical Life:	15,000 operations minimum
Electrical Life:	7,500 operations minimum
Range of Operating Torque:	0.03 ~ 0.15Nm for MRX; 0.02 ~ 0.10Nm for MRY; 0.02 ~ 0.05Nm for MRT
Contact Timing:	Nonshorting (break-before-make) MRX: Self-cleaning, sliding contact; MRY: Rotary contactor dish; MRT: Butt contacts
Indexing:	45° for MRX; 60° for MRY; 120° for MRT22; 60° for MRT23

Materials & Finishes

Shaft:	Brass with nickel plating
Stopper Plate:	Steel with zinc plating for MRX & MRY
Bushing/Housing:	Brass with nickel plating
Movable Contacts:	Silver alloy for MRX & MRT; copper with silver plating for MRY106; copper with gold plating for MRY106G
End Contacts & Terminals:	Silver alloy & copper with silver plating for MRX & MRT; silver alloy plus brass with silver plating for MRY106; silver alloy with gold plating for MRY106G
Common Contacts & Terminals:	Copper with silver plating for MRX, MRY106 & MRT22; brass with gold plating for MRY106G; brass with silver plating for MRT23
Base:	Phenolic resin

Environmental Data

Operating Temperature Range:	-10°C through +70°C (+14°F through +158°F)
Humidity:	90 ~ 95% humidity for 96 hours @ 40°C (104°F)
Vibration:	10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours
Shock:	50G (490m/s ²) acceleration (tested in 3 right angled directions, with 3 shocks in each direction)

Installation

Mounting Torque:	.686Nm (6.08 lb•in)
Cap Installation Force:	19.6 ~ 29.4N (4.41 ~ 6.61 lbf)
Soldering Time & Temperature:	Manual Soldering: See Profile A in Supplement section.

Standards & Certifications

UL:	File No. E44145 - Recognized only when ordered with marking on switch. Add "/U" or "/CUL" before dash in part number to order UL recognized switch. MRT22 models recognized at 10A @ 125V AC; MRT23 models recognized at 5A @ 125V AC
------------	--

Distinctive Characteristics

Positive detent mechanism for distinct feel and audible feedback.

Metal bushing and housing construction increases durability.


Adjustable stopper plate allows 2-8 position settings.

High contact reliability achieved by the self-cleaning contact mechanism.


Break-before-make contact timing with various mechanism types: sliding contacts in MRX, contactor dish in MRY, and butt contacts in MRT models.

Terminal types include PC-turret for MRX, turret for MRY, and solder lug for MRT models.

Molded-in PC-turret and turret terminals prevent entry of flux and other contaminants.

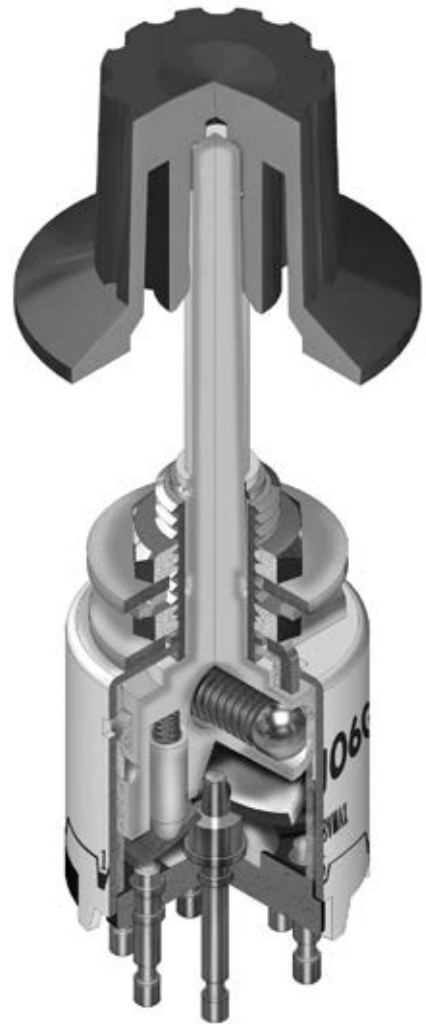

Actual Size

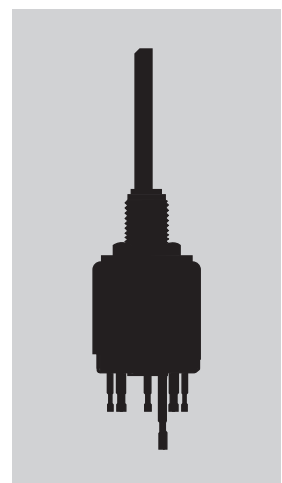

Toggles

Rockers

Pushbuttons

Illuminated PB

Programmable

Keylocks

 Rotaries

Slides

Tactiles

Tilt

Touch

Indicators

Accessories

Supplement

TYPICAL SWITCH ORDERING EXAMPLE

MR

X

108

A

Actuators & Terminals

Poles & Circuits

Knobs

Colors

X Shaft Actuated with PC-Turret Terminals

108	SP with 2-8 Positions
204	DP with 2-4 Positions
402	4P with 2 Positions

A	Plain Black
B	Small Color Tipped
C	Large Color Tipped

For Plain Knob	
No Code	Black

Y Shaft Actuated with Turret Terminals

106	SP with 2-6 Positions
106G	SP with 2-6 Positions Gold Contacts 0.4VA

For Color Tipped	
A	Black
B	White
C	Red
E	Yellow
F	Green
G	Blue
H	Gray

T Shaft Actuated with Solder Lug Terminals

22	DPDT ON-NONE-ON
23	DPDT ON-OFF-ON

DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

MRX108-A

Shaft Actuated with Plain Black Knob

SP with 2-8 Adjustable Positions

PC-Turret Terminals



IMPORTANT:

MRT Switches are supplied without UL & cULus marking unless specified.

UL & cULus recognized only when ordered with marking on the switch.

Specific models, ratings, & ordering instructions are noted on the General Specifications page.




ACTUATORS & TERMINALS

X Shaft Actuated with PC-Turret Terminals


Y Shaft Actuated with Turret Terminals

T Shaft Actuated with Solder Lug Terminals

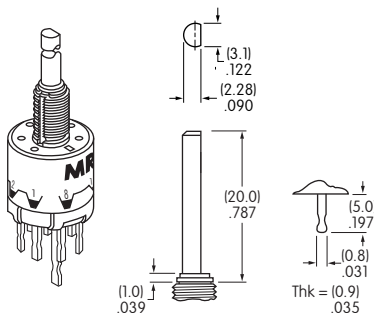


Shaft

Terminal

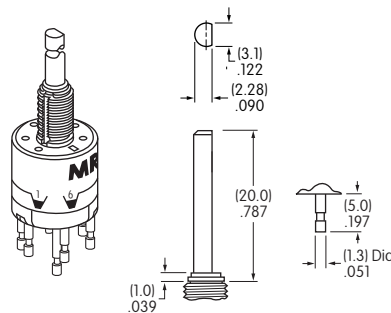





Shaft

Terminal

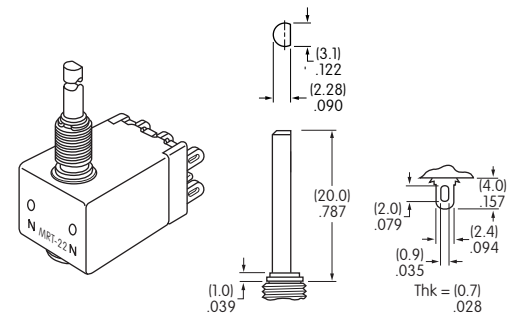

Shaft

Terminal


POLES & CIRCUITS					
Pole	Model	Number of Positions	Stopper Settings	Number of Terminals	Schematics
SP	MRX108	2-8	2, 3, 4, 5, 6, 7, 8	1 COM, 8 LOAD	
	MRY106 MRY106G	2-6	2, 3, 4, 5, 6	1 COM, 6 LOAD	
DP	MRX204	2-4	2, 3, 4	2 COM, 8 LOAD	
DPDT	MRT22	2	ON-NONE-ON	2-3 2-1 5-6 5-4	
	MRT23	3	ON-OFF-ON	2-3 OPEN 2-1 5-6 OPEN 5-4	
4P	MRX402	2	1 & 2	4 COM, 8 LOAD	

POSITION SETTING FOR MRX & MRY MODELS


Each switch is supplied with the stopper set for the maximum number of positions allowed for that model. Prior to installation, the desired position setting should be made. Contact factory for continuous rotation.

1. Using the actuator knob, turn the shaft counterclockwise to the extreme left. If the shaft is not turned to this extreme position where the white line on the knob points to the number 1 position shown on the side of the switch, proper setting cannot be achieved.
2. Remove the knob from the shaft and loosen the nut far enough to allow raising the stopper plate for resetting to the desired position.
3. Note the position numbers on the side of the switch; these correspond to the terminal numbers and stopper holes. Insert the stopper in the hole numbered for the maximum desired number of stop settings. Satisfactory switch functioning cannot be assured if the stopper plate is not properly positioned.
4. Tighten the nub (beveled side up) firmly against the stopper plate.

Mounting Hardware Packaged Loose with Each Switch




Factory Assembled:

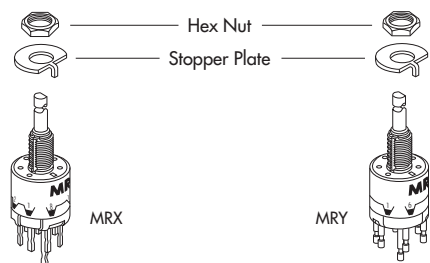


TYPICAL SWITCH DIMENSIONS

Single, Double & Four Pole

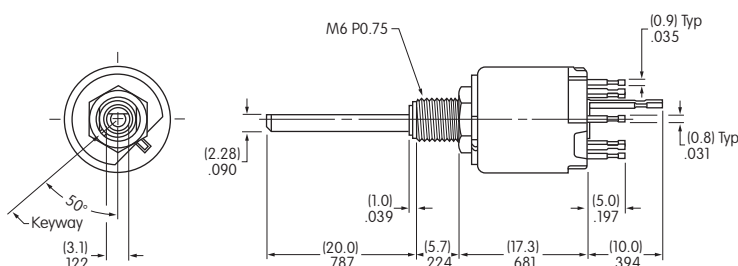

MRX • PC-Turret Terminals




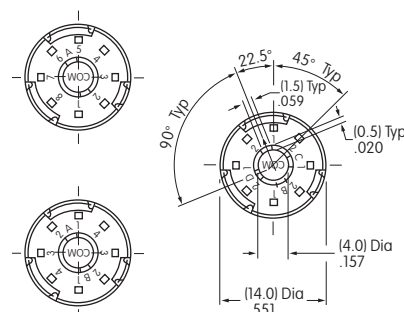


MRX108

TYPICAL SWITCH DIMENSIONS

MRY • Turret Terminals




Single Pole

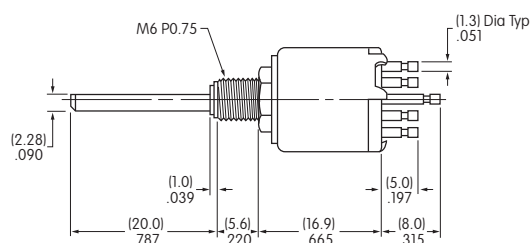

MRY106

MRT • Solder Lug Terminals




Double Pole

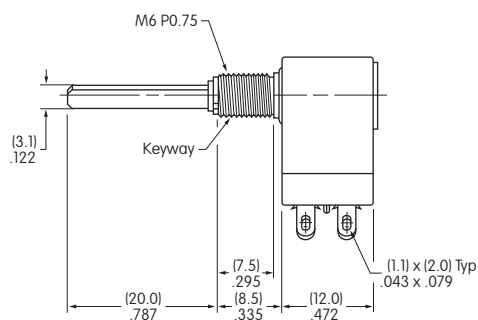

MRT22

MRT • Solder Lug Terminals


Double Pole

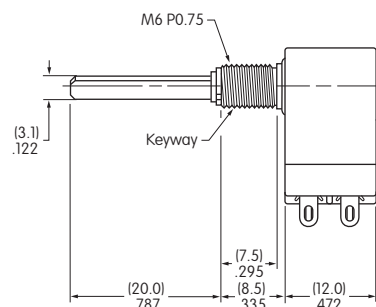


MRT23

PC FOOTPRINTS FOR MRX SINGLE, DOUBLE, & FOUR POLE


Single Pole



Double Pole




Four Pole



KNOBS


A AT433 Plain Black



Material: Polyacetal

Color: Black only

B AT4103 Small Color Tipped




Base Material: Polyester

Base Color: Black

Polyamide Tip

Colors: A, B, C, E, F, G, H

C AT4104 Large Color Tipped



Base Material: Polyester

Base Color: Black

Polyamide Tip

Colors: A, B, C, E, F, G, H

Color Codes:

A Black

B White

C Red

E Yellow


F Green

G Blue


H Gray

PANEL CUTOUTS & MAXIMUM EFFECTIVE PANEL THICKNESS

Without Keyway



With Keyway



Maximum Effective Panel Thickness

With Standard Hardware: MRX & MRY .095" (2.4mm); MRT .106" (2.7mm)

Without Locking Ring: MRX & MRY .126" (3.2mm); MRT .138" (3.5mm)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

NKK Switches:

[MRX402-CE](#) [MRX402-CB](#) [MRX402-CF](#) [MRX402-BF](#) [MRX402-BG](#) [MRX402-BC](#) [MRX402-BH](#) [MRX402-BE](#)
[MRX402-BA](#) [MRX402-CG](#) [MRX402-CH](#) [MRX108-BE](#) [MRX108-BF](#) [MRX204-BE](#) [MRX204-BA](#) [MRX204-CC-RO](#)
[MRX204-BC](#) [MRX204-CB](#) [MRX204-CA](#) [MRX204-BF](#) [MRX204-CG](#) [MRX204-CH](#) [MRX108-CE](#) [MRX108-CA](#)
[MRX108-CF](#) [MRX108-CC](#) [MRX108-CG](#) [MRX108-CH](#) [MRX108-CB](#) [MRY106](#) [MRY106-A](#) [MRY106-BA](#) [MRY106-BB](#)
[MRY106-CC](#) [MRY106-CH](#) [MRY106G-CG](#) [MRT23-CB](#) [MRY106-CB-RO](#) [MRT22-BF](#) [MRX204-CE](#) [MRX402-CA](#)
[MRX108-A](#) [MRX402-CC](#) [MRT22](#) [MRX108-BH](#) [MRX108-BC](#) [MRX204-A](#) [MRX402-BB](#) [MRT23-A](#) [MRX402-A](#)
[MRX204-BB](#) [MRT22-A](#) [MRT23](#) [MRX108-BA](#) [MRX108-BB](#) [MRX204-CF](#) [MRX204-BG](#) [MRX204-BH](#) [MRX108-BG](#)
[MRT23-BB](#) [MRX204-CC](#) [MRY106-CB](#)