
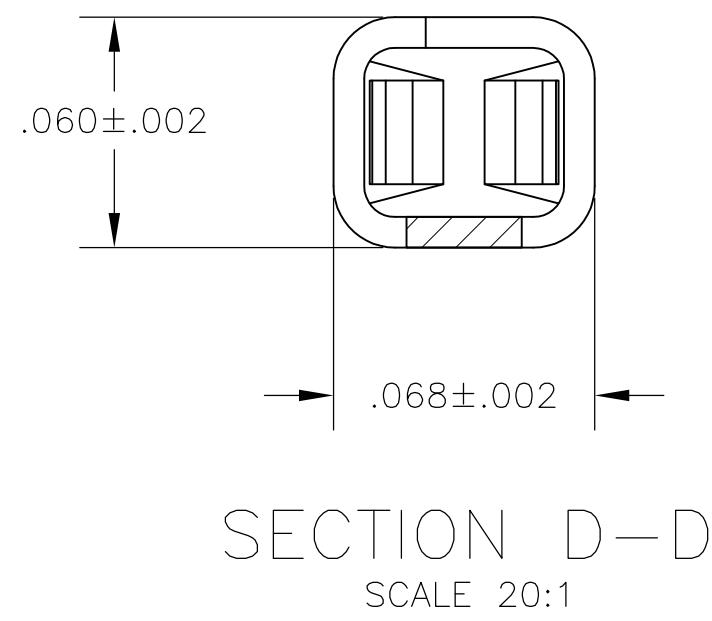
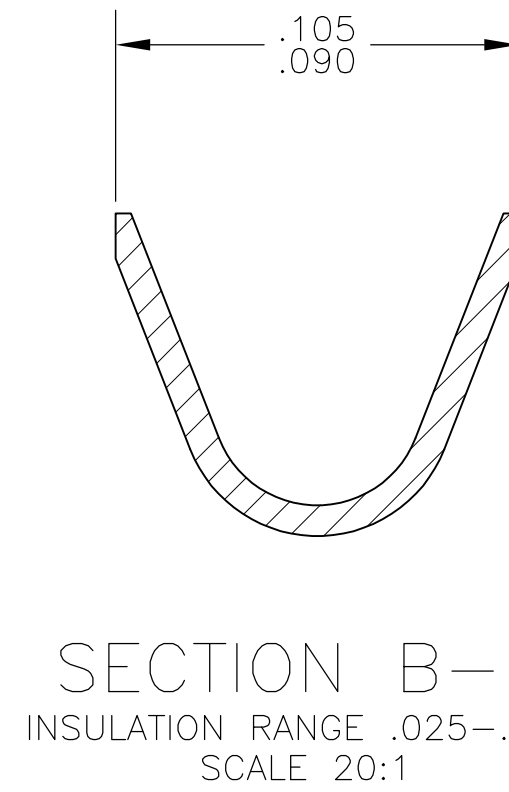


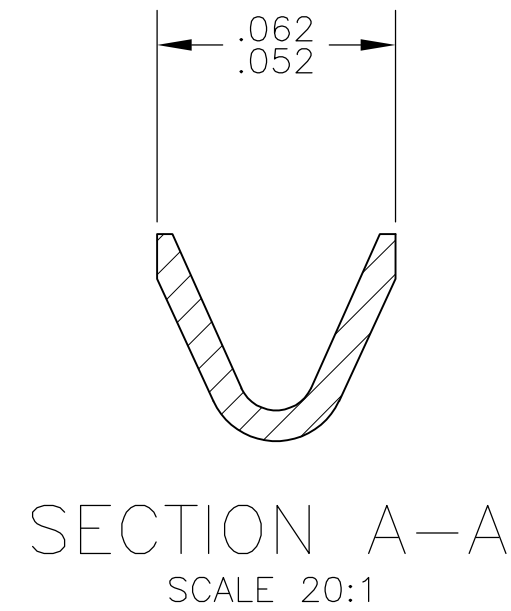

1. .000100 MIN BRIGHT TIN—LEAD OVER .000050 MIN NICKEL ON ENTIRE CONTACT
2. .000050 MIN NICKEL ON ENTIRE CONTACT; .000015 MIN GOLD ON CONTACT AREA; .000050 MIN BRIGHT TIN—LEAD ON AREA M.
3. .000050 MIN NICKEL ON ENTIRE CONTACT; .000030 MIN GOLD ON CONTACT AREA; .000050 MIN BRIGHT TIN—LEAD ON AREA M.
4. LOOSE PIECE CUT—OFF DIMENSION.
5. .000015 MIN GOLD ON CONTACT AREA, .000050 MIN TIN ON AREA M, ALL OVER .000050 MIN NICKEL ON ENTIRE CONTACT.
6. .000030 MIN GOLD ON CONTACT AREA, .000050 MIN TIN ON AREA M, ALL OVER .000050 MIN NICKEL ON ENTIRE CONTACT.
8. .000100 MIN TIN OVER .000050 MIN NICKEL ON ENTIRE CONTACT

	LOOSE PIECE		REF	5-104481-6
	STRIP			5-104481-2
	LOOSE PIECE		REF	1-104481-3
	LOOSE PIECE		REF	1-104481-2
	STRIP			1-104481-1
	STRIP			1-104481-0
OBSOLETE	LOOSE PIECE			104481-9
	LOOSE PIECE		REF	104481-8
	LOOSE PIECE		REF	104481-7
	LOOSE PIECE		REF	104481-6
OBSOLETE	STRIP			104481-5
	STRIP			104481-4
	STRIP			104481-3
	STRIP			104481-2
	REMARKS		FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.						DWG C. OBERMAN	5-10-89			TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHECKED K. HELM	5-12-89	NAME		CONTACT, CRIMP SNAP-IN AMPMODU SHORT POSITION, 28-32 AWG			
		D PLCS ± . E PLCS ± . F PLCS ± .005 G PLCS ± . H ANGLES ± .		APPROVED R. FICKLER		PRODUCT SPEC 108-1472		APPLICATION SPEC 114-25038			
MATERIAL PHOSPHOR BRONZE	FINISH SEE TABLE				WEIGHT —		SIZE A1	CAGE CODE 00779	DRAWING NO. C=104481	RESTRICTED TO —	
CUSTOMER DRAWING						SCALE 10:1		SHEET 1	OF 1	REV. N	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-104481-0 \(Cut Strip\)](#) [1-104481-0 \(Mouser Reel\)](#) [1-104481-1 \(Mouser Reel\)](#) [1-104481-1 \(Cut Strip\)](#)