

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION NOV ,2005.

© COPYRIGHT 2005 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC E	DIST B	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			C	ECR-05-015880	21NOV05	JMS	FWK

NOTES:

1 PACK IN ACCORDANCE WITH AMP SPEC 107-3275

2 100 TRAY PACK IN ACCORDANCE WITH AMP SPEC 107-3275

3 Ag PLATING

4 THIS ITEM MUST BE WHITE

5 ELECTRICAL CHARACTERISTICS


FREQUENCY RANGE: DC - 2 GHz
NOMINAL IMPEDANCE: 75 Ohm
INSULATION RESISTANCE: 5000 MOhm
WORKING VOLTAGE: 500 Volts RMS at Sea Level
DIELECTRIC WITHSTAND VOLTAGE: 1500 Volts RMS Max
CONTACT RESISTANCE:
CENTRE CONTACT: 1.50 mOhm Max
OUTER CONTACT: 0.20 mOhm Max
VSWR @ 2GHz: 1.20:1 Max
INSERTION LOSS dB @ x 2 GHz: 0.20 Max

6 MECHANICAL CHARACTERISTICS


COUPLING RETENTION FORCE: N/A
CABLE RETENTION FORCE: 170N Min
CLAMP NUT RECOMMENDED TORQUE: 4N
DURABILITY: 500 Cycles Min

7 ENVIRONMENTAL CHARACTERISTICS



OPERATING TEMPERATURE: -65 to +165 DegC

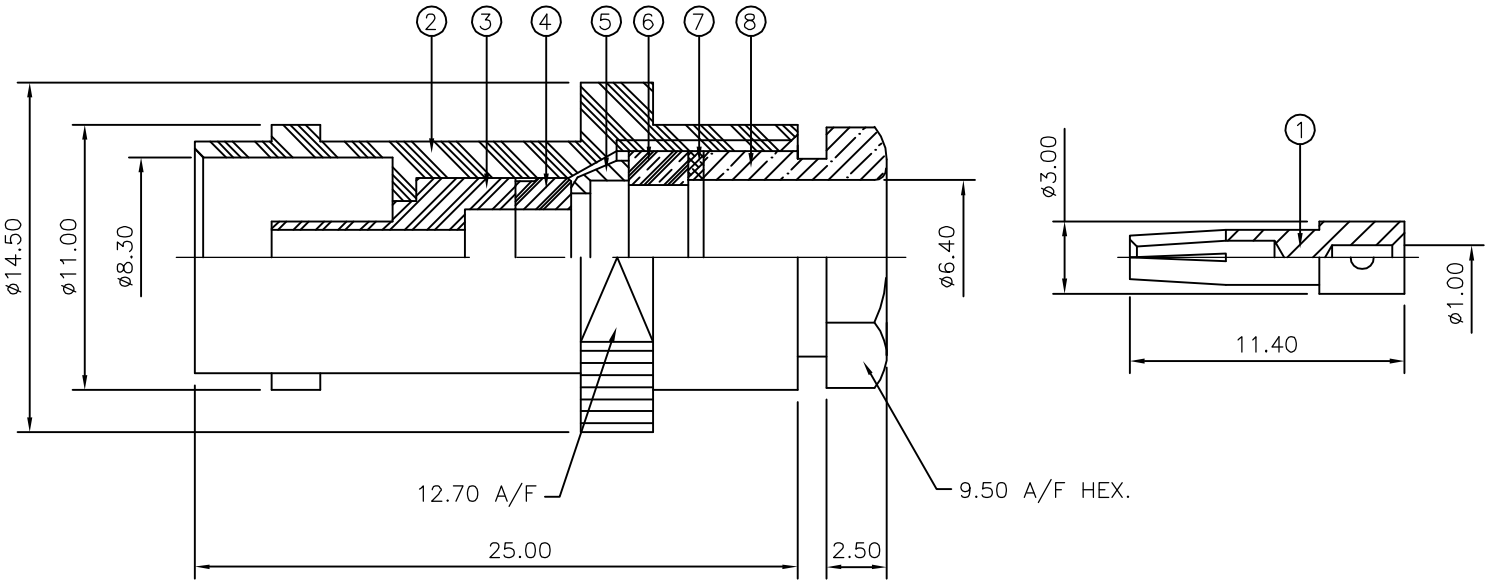

RECOMMENDED
CABLE STRIPPING DIM'S



		1	1	BRASS	3	CLAMP NUT	8
		1	1	BRASS	3	WASHER	7
		1	1	SILICON RUBBER	4	GASKET	6
		1	1	BRASS	3	BUSH	5
		1	1	BRASS	3	SLEEVE	4
		1	1	PTFE		INSULATION	3
		1	1	BRASS	3	BODY	2
		1	1	BRASS	3	CONTACT	1
		6--0	1--0	MATERIAL		DESCRIPTION	ITEM
		3	3				
QUANTITY PER ASSY				PARTS LIST			

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.SANDWELL	21NOV05	tyco		Tyco Electronics Corporation							
		CHK S.PARLOW	21NOV05	Electronics		Bideford EX39 4HE							
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD F.WHEELER-KING	NAME		BNC STRAIGHT JACK SOLDER 75 OHM RG59B/U, 62A/U, 140/U, 210/U, URM90, PSF1/3M, TM3304, KX6A, KX25, KX52, KX53						
				PRODUCT SPEC	SIZE						CAGE CODE	DRAWING NO	RESTRICTED TO
				108-3435									
MATERIAL SEE TABLE		FINISH —		APPLICATION SPEC	A3		00779	C-1337424	—				
				411-3252									
				WEIGHT —									
CUSTOMER DRAWING					SCALE NTS		SHEET 1 OF 1		REV C				