

LOC E	DIST B	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			B	ECR-06-013423	14JUN06	JMS	FWK

NOTES:

- 1

PACK IN ACCORDANCE WITH AMP SPEC 107-3275
- 2

100 TRAY PACK IN ACCORDANCE WITH AMP SPEC 107-3275
- 3

Ag PLATING
- 4

ELECTRICAL CHARACTERISTICS

FREQUENCY RANGE:DC - 4 GHz

NOMINAL IMPEDANCE:50 Ohm

INSULATION RESISTANCE:5000 MOhm

WORKING VOLTAGE:500 Volts RMS at Sea Level

DIELECTRIC WITHSTAND VOLTAGE:1500 Volts RMS Max

CONTACT RESISTANCE:

CENTRE CONTACT:1.50 mOhm Max

OUTER CONTACT:0.20 mOhm Max

VSWR @ xGHz:N/A

INSERTION LOSS xdb:N/A
- 5

MECHANICAL CHARATERISTICS

COUPLING RETENTION FORCE:N/A

CABLE RETENETION FORCE:N/A

MOUNT NUT RECOMMENDED TORQUE:4N



DURABILITY:500 Cycles Min
- 6

ENVIRONMENTAL CHARACTERISTICS


OPERATING TEMPERATURE:-65 to +165 DegC
- 7

FOR TECHNICAL DATA REFER TO YOUR LOCAL TYCO ELECTRONICS SALES OFFICE
- 8

ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED

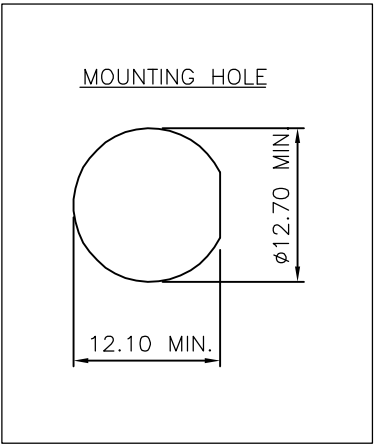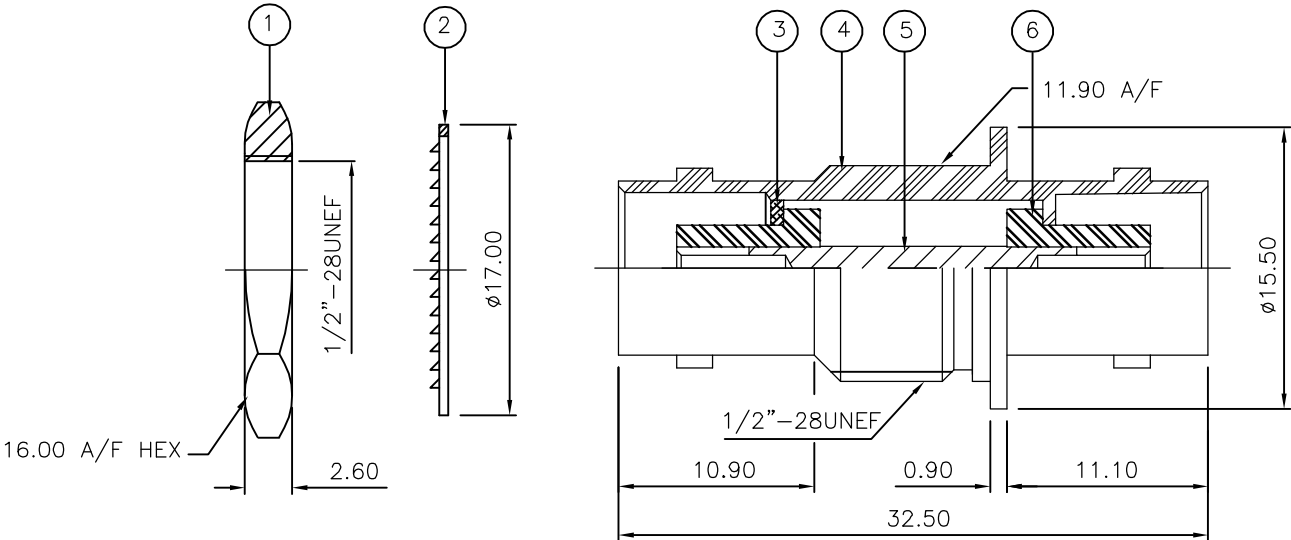

		2	2	PTFE	INSULATION	6
		1	1	BRASS	CONTACT	5
		1	1	BRASS	BODY	4
		1	1	BRASS	WASHER	3
		1	1	STEEL	LOCKWASHER	2
		1	1	BRASS	HEX NUT	1
		6--0	1--0	MATERIAL	DESCRIPTION	ITEM
QUANTITY PER ASSY			PARTS LIST			

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.SANDWELL 14JUN06	tyco Electronics Tyco Electronics Corporation Bideford EX39 4HE					
		CHK S.PARLOW 14JUN06						
DIMENSIONS: mm		APVD F.WHEELER-KING 14JUN06	NAME BNC BULKHEAD ADAPTOR J-J 50 OHM					
		PRODUCT SPEC —						
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		APPLICATION SPEC —	SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO	
		WEIGHT —	A3		00779	C-1478046		—
		MATERIAL SEE TABLE		CUSTOMER DRAWING		SCALE NTS	SHEET 1 OF 1	REV B

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1478046-0](#)