THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

LOC	DIST
—	—

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	H2	REVISED PER ECO-11-004587	11MAR11	RK	HMR

NOTES	(13) QC TAB .187 SS FLAT	(12) QC TAB .187 SS FLAT	(11) QC TAB .187 SS 90°	(10) JUMPER	(9) QC TAB DBL SIDE 90° .250	(8) QC TAB DBL SIDE 45° .250	(7) QC TAB DBL SIDE FLAT .250	(6) QC TAB DBL SIDE 90° .187	(5) QC TAB DBL SIDE 45° .187	(4) QC TAB DBL SIDE FLAT .187	(3) QC TAB SGL SIDE 90° .250	(2) QC TAB SGL SIDE 45° .250	(1) QC TAB SGL SIDE FLAT .250	DIM B	DIM A	NO. OF POS.	PART NO.
–	–	–	–	–	–	–	–	–	–	–	–	–	–	180.7	188.2	18	1-1546306-8
–	–	–	–	–	–	–	–	–	–	–	–	–	–	171.2	178.7	17	1-1546306-7
–	–	–	–	–	–	–	–	–	–	–	–	–	–	161.7	169.2	16	1-1546306-6
1 2 3 4 –	–	–	–	–	–	–	–	–	–	–	–	–	–	152.2	159.7	15	6-1546306-2
–	–	–	–	–	–	–	–	–	–	–	–	–	–	152.2	159.7	15	1-1546306-5
–	–	–	–	–	–	–	–	–	–	–	–	–	–	142.7	150.2	14	1-1546306-4
–	–	–	–	–	–	–	–	–	–	–	–	–	–	133.2	140.7	13	1-1546306-3
3 5 –	–	–	–	–	–	–	–	–	–	–	–	–	–	123.7	131.2	12	4-1546306-0
3 4 –	–	–	–	–	–	–	–	–	–	–	–	–	–	123.7	131.2	12	3-1546306-3
–	–	–	–	–	–	–	–	–	–	–	–	–	–	123.7	131.2	12	1-1546306-2
6 –	–	–	11	–	–	–	–	–	–	–	–	–	–	114.2	121.7	11	5-1546306-2
1 3 –	–	–	–	2	–	–	–	–	11	–	–	–	–	114.2	121.7	11	3-1546306-4
3 –	–	–	–	–	–	–	–	–	11	–	–	–	–	114.2	121.7	11	3-1546306-1
–	–	–	–	–	–	–	–	–	–	–	–	–	–	114.2	121.7	11	1-1546306-1
1 –	–	–	–	–	–	–	–	10	3	–	–	–	–	104.7	112.2	10	6-1546306-0
3 6 –	–	–	–	–	–	–	–	–	–	–	–	–	–	104.7	112.2	10	5-1546306-8
–	–	–	–	–	–	–	–	–	–	–	–	–	–	104.7	112.2	10	1-1546306-0
2 3 7 –	4	9	–	–	–	–	–	–	–	–	–	–	–	95.2	102.7	9	6-1546306-3
3 6 –	–	–	–	–	–	–	–	–	–	–	–	–	–	95.2	102.7	9	5-1546306-6
–	–	–	–	–	–	–	–	–	–	–	–	–	–	95.2	102.7	9	1546306-9
–	–	–	–	–	–	–	–	8	–	–	–	–	–	85.7	93.2	8	5-1546306-9
3 5 –	–	–	–	–	–	–	–	–	–	–	–	–	–	85.7	93.2	8	3-1546306-9
–	–	–	–	–	–	–	–	–	–	–	–	–	–	85.7	93.2	8	1546306-8
3 6 –	–	–	–	–	–	–	–	–	–	–	–	–	–	76.2	83.7	7	5-1546306-5
1 –	–	–	–	1	–	–	7	–	–	–	–	–	–	76.2	83.7	7	5-1546306-0
–	–	–	–	–	–	–	–	–	–	–	7	7	7	76.2	83.7	7	4-1546306-5
3 –	–	–	–	–	–	–	–	–	7	–	–	–	–	76.2	83.7	7	3-1546306-7
–	–	–	–	–	–	–	–	–	–	–	–	–	–	76.2	83.7	7	1546306-7
3 6 –	–	–	–	–	–	–	–	–	–	–	–	–	–	66.7	74.2	6	5-1546306-4
1 3 –	–	–	–	–	–	1	6	–	–	–	–	–	–	66.7	74.2	6	4-1546306-9
–	–	–	–	–	6	–	–	–	–	–	–	–	–	66.7	74.2	6	4-1546306-8
–	–	–	–	–	–	–	–	–	–	–	6	6	6	66.7	74.2	6	4-1546306-4
3 –	–	–	–	–	–	–	–	–	6	–	–	–	–	66.7	74.2	6	3-1546306-6
–	–	–	–	–	–	–	–	–	–	–	–	–	–	66.7	74.2	6	1546306-6
6 –	–	–	–	–	–	–	–	5	–	–	–	–	–	57.2	64.7	5	5-1546306-7
6 –	5	5	–	–	–	–	–	–	–	–	–	–	–	57.2	64.7	5	5-1546306-3
1 3 SCREW ON ONE SIDE	–	–	–	–	–	–	–	–	–	–	–	–	–	57.2	64.7	5	4-1546306-7
–	–	–	–	–	–	–	–	–	–	–	5	5	5	57.2	64.7	5	4-1546306-3
3 –	–	–	–	–	–	–	–	–	5	–	–	–	–	57.2	64.7	5	3-1546306-5
–	–	–	–	–	–	–	–	–	–	–	–	–	–	57.2	64.7	5	1546306-5
–	–	–	–	–	–	–	–	–	–	–	4	4	4	47.7	55.2	4	4-1546306-2
3 5 –	–	–	–	–	–	–	–	–	–	–	–	–	–	47.7	55.2	4	3-1546306-8
–	–	–	–	–	–	–	–	–	–	–	–	–	–	47.7	55.2	4	1546306-4
–	3	3	–	–	–	–	–	–	–	–	–	–	–	38.2	45.7	3	6-1546306-1
–	–	–	–	–	–	–	–	–	–	–	–	–	–	38.2	45.7	3	5-1546306-1
–	–	–	–	–	–	–	–	–	–	–	–	–	–	38.2	45.7	3	1546306-3
3 –	–	–	–	–	–	–	–	2	2	2	–	–	–	28.7	36.2	2	4-1546306-6
–	–	–	–	–	2	2	2	–	–	–	–	–	–	28.7	36.2	2	4-1546306-1
–	–	–	–	–	–	–	–	–	–	–	–	–	–	28.7	36.2	2	1546306-2

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± 0.3
2 PLC ± 0.25
3 PLC ± –
4 PLC ± –
ANGLES ± 2°

MATERIAL –
FINISH –

DWN S SCHLEGEL 20AUG2002
CHK C RICHARD 8/20/02
APVD C RICHARD 8/20/02
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

TE Connectivity

NAME 9.50MM (.374) DBL ROW BARRIER STRIP W/O WASHER

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-1546306	—

CUSTOMER DRAWING | SCALE NTS | SHEET 1 OF 3 | REV H2

1546306

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

LOC	DIST
—	—

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	–	SEE SHEET 1	–	—	—

PHYSICAL PROPERTIES:
HOUSING MATERIAL: THERMOPLASTIC, PC
FLAMMABILITY: UL94V–0 COLOR: BLACK
MAX BOW/WARP: .0056 IN/IN.

TERMINAL:
TERMINALS: BRASS, TIN PLATED
SCREWS: 6–32, STEEL, NICKEL PLATED

MECHANICAL:
PITCH (TERMINAL SPACING): 9.50mm(.374")
WIRE RANGE: 12–22 AWG
RECOMMENDED TIGHTENING TORQUE: 12IN–LBS MAX.

ELECTRICAL PROPERTIES:
MAXIMUM CURRENT: 20A
OPERATING VOLTAGE: 300V

ENVIRONMENTAL PROPERTIES:
OPERATING TEMP RANGE: –40°C TO +120°C.

1. SEE FIGURE.
2. MARKED WITH WHITE INK.
3. PRELIMINARY PART NUMBER.
4. SCREWS AND TERMINALS ARE NICKEL PLATED BRASS.
5. STAINLESS STEEL SCREWS.
6. SCREWS ARE NICKEL PLATED BRASS.
7. WIRE CLAMP SCREWS TO BE USED ONLY ON SIDE OPPOSITE QC TABS.
8. TE CONNECTIVITY LOGO LOCATED APPROXIMATE AREA SHOWN.

-- SELECT LOAD CHART --

(12) QC TAB .187 SS FLAT	(11) QC TAB .187 SS 90°	(10) JUMPER	(9) QC TAB DBL SIDE 90° .250	(8) QC TAB DBL SIDE 45° .250	(7) QC TAB DBL SIDE FLAT .250	(6) QC TAB DBL SIDE 90° .187	(5) QC TAB DBL SIDE 45° .187	(4) QC TAB DBL SIDE FLAT .187	(3) QC TAB SGL SIDE 90° .250	(2) QC TAB SGL SIDE 45° .250	(1) QC TAB SGL SIDE FLAT .250	NO. OF POS.	PART NUMBER
POSITIONS LOADED													
–	–	4–5,5–6	–	–	–	–	ALL	–	–	–	–	11	3–1546306–4
–	–	–	–	–	–	ALL	1–3	–	–	–	–	10	6–1546306–0
–	–	1,2	–	–	ALL	–	–	–	–	–	–	7	5–1546306–0
–	–	–	–	1	ALL	–	–	–	–	–	–	6	4–1546306–9

NOTES	(13) QC TAB .187 SS FLAT	(12) QC TAB .187 SS FLAT	(11) QC TAB .187 SS 90°	(10) JUMPER	(9) QC TAB DBL SIDE 90° .250	(8) QC TAB DBL SIDE 45° .250	(7) QC TAB DBL SIDE FLAT .250	(6) QC TAB DBL SIDE 90° .187	(5) QC TAB DBL SIDE 45° .187	(4) QC TAB DBL SIDE FLAT .187	(3) QC TAB SGL SIDE 90° .250	(2) QC TAB SGL SIDE 45° .250	(1) QC TAB SGL SIDE FLAT .250	DIM B	DIM A	NO. OF POS.	PART NO.
–	–	–	–	–	–	–	–	–	–	–	–	–	–	294.7	302.2	30	3–1546306–0
–	–	–	–	–	–	–	–	–	–	–	–	–	–	285.2	292.7	29	2–1546306–9
–	–	–	–	–	–	–	–	–	–	–	–	–	–	275.7	283.2	28	2–1546306–8
–	–	–	–	–	–	–	–	–	–	–	–	–	–	266.2	273.7	27	2–1546306–7
–	–	–	–	–	–	–	–	–	–	–	–	–	–	256.7	264.2	26	2–1546306–6
–	–	–	–	–	–	–	–	–	–	–	–	–	–	247.2	254.7	25	2–1546306–5
–	–	–	–	–	–	–	–	–	–	–	–	–	–	237.7	245.2	24	2–1546306–4
–	–	–	–	–	–	–	–	–	–	–	–	–	–	228.2	235.7	23	2–1546306–3
–	–	–	–	–	–	–	–	–	–	–	–	–	–	218.7	226.2	22	2–1546306–2
–	–	–	–	–	–	–	–	–	–	–	–	–	–	209.2	216.7	21	2–1546306–1
1 2 SPL MARKING	–	–	–	–	–	–	–	–	–	–	–	–	–	199.7	207.2	20	3–1546306–2
–	–	–	–	–	–	–	–	–	–	–	–	–	–	199.7	207.2	20	2–1546306–0
–	–	–	–	–	–	–	–	–	–	–	–	–	–	190.2	197.7	19	1–1546306–9

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± 0.3
2 PLC ± 0.25
3 PLC ± –
4 PLC ± –
ANGLES ± 2°

MATERIAL –
FINISH –

DWN S SCHLEGEL 20AUG2002
CHK C RICHARD 8/20/02
APVD C RICHARD 8/20/02
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

TE Connectivity

NAME 9.50MM (.374) DBL ROW BARRIER STRIP W/O WASHER —

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-1546306	—

CUSTOMER DRAWING | SCALE NTS | SHEET 2 OF 3 | REV H2

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

LOC	DIST
—	—

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	–	SEE SHEET 1	–	—	—

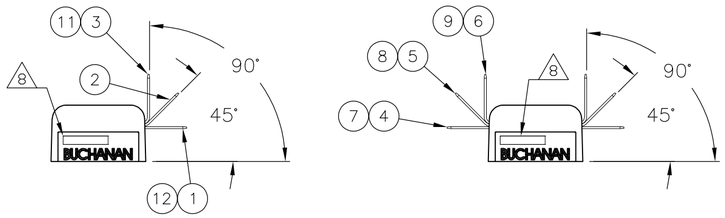

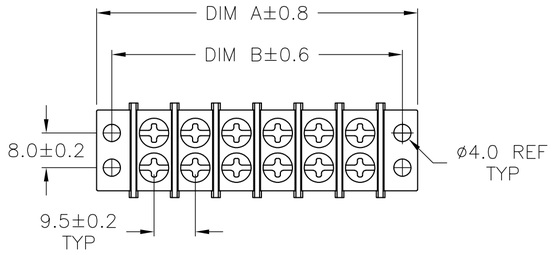

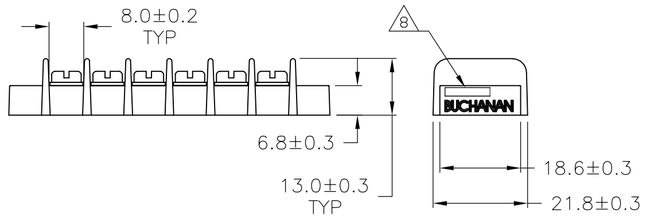

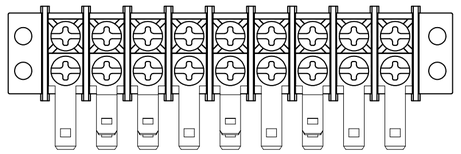

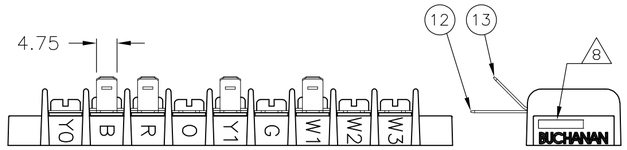

6–1546306–3

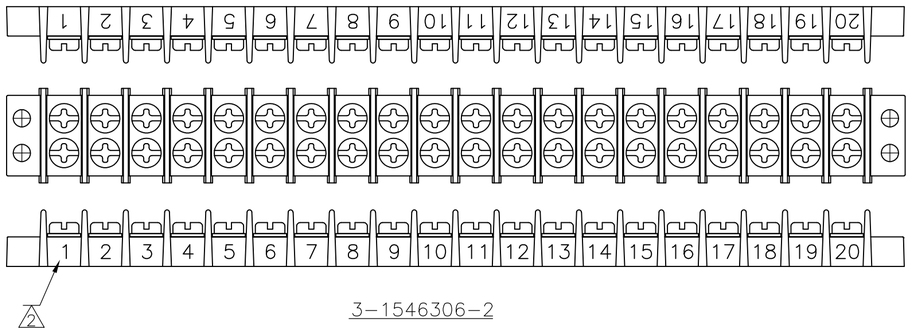

3–1546306–2

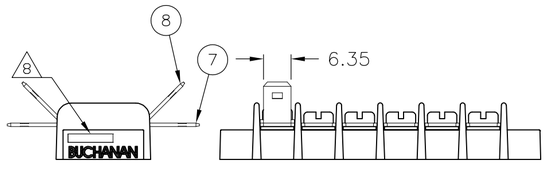

4–1546306–9

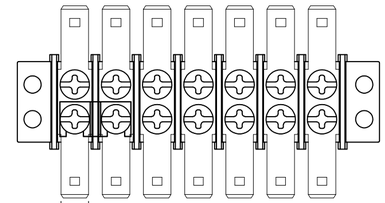

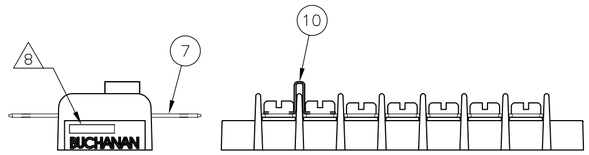

5–1546306–0

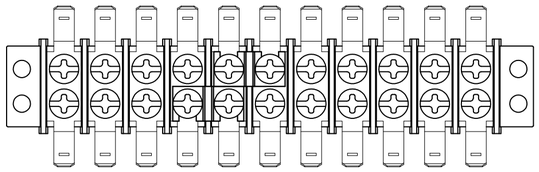

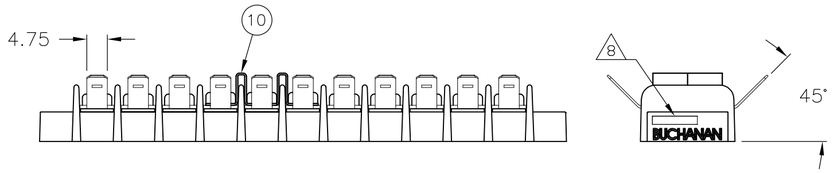

3–1546306–4

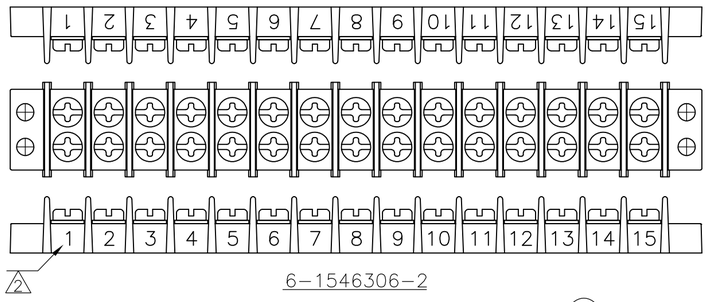

6–1546306–2

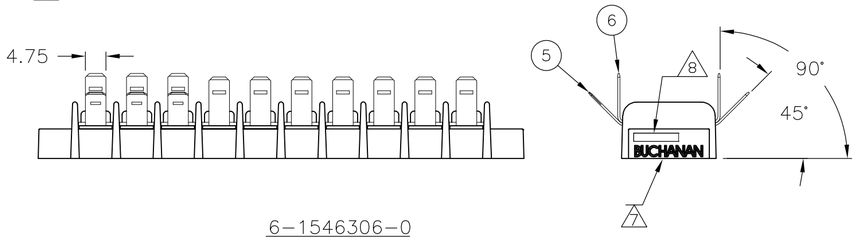

6–1546306–0



4–1546306–7

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL 20AUG2002	TE Connectivity
DIMENSIONS: MM	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± –; 1 PLC ± 0.3; 2 PLC ± 0.25; 3 PLC ± –; 4 PLC ± –; ANGLES ± 2°	CHK C RICHARD 8/20/02	NAME 9.50MM (.374) DBL ROW BARRIER STRIP W/O WASHER –
		APVD C RICHARD 8/20/02	
		PRODUCT SPEC —	
		APPLICATION SPEC —	SIZE A2 · CAGE CODE 00779 · DRAWING NO C-1546306 · RESTRICTED TO —
MATERIAL –	FINISH –	WEIGHT –	CUSTOMER DRAWING · SCALE NTS · SHEET 3 OF 3 · REV H2

1546306

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

1-1546306-0