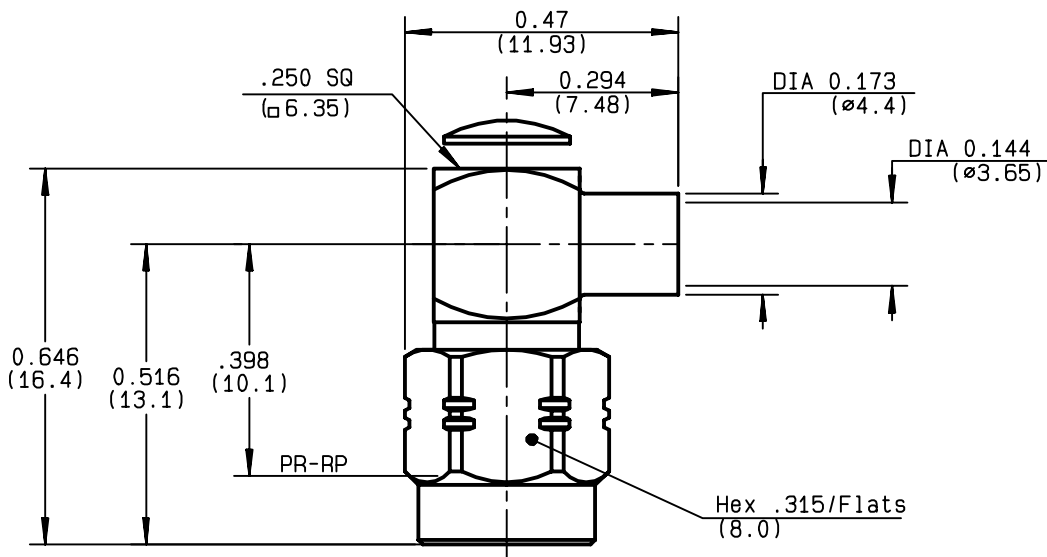


RIGHT ANGLE PLUG SOLDER TYPE
CABLE .141
R124.154.003
SERIES SMA-COM


NOMINAL IMPEDANCE	50	Ω
FREQUENCY RANGE	0-12.4	GHz
TEMPERATURE RATING	-65/+105	$^{\circ}\text{C}$
V.S.W.R	1.10 + .01 x F(GHz)Maxi	
RF INSERTION LOSS	0.05 $\sqrt{F}$ (GHz) dB Maxi	
VOLTAGE RATING	500	Veff Maxi
DIELECTRIC WITHSTANDING VOLTAGE	1000	Veff Mini
INSULATION RESISTANCE	5000	M Ω Mini
HERMETIC SEAL	NA	Atm.cm ³ /s
LEAKAGE (pressurized only)	NA	
MECHANICAL DURABILITY	100	Cycles
WEIGHT	4.1	gr
SPECIFICATION		

CABLES : **KS 2**
RG 402

OTHERS CHARACTERISTICS

CABLE RETENTION	270	N Mini
CENTER CONTACT RETENTION		
Axial force - mating end	27	N Mini
Axial force - opposite end	27	N Mini
Torque	NA	cm.N Mini
RECOMMENDED TORQUES		
Mating	60	cm.N
Panel nut	NA	cm.N
Clamp nut	NA	cm.N

CONNECTOR PARTS	MATERIALS	FINISH (all values are given in micrometers)
BODY	BRASS	GOLD 0.2 OVER NICKEL 2
OUTER CONTACT		
CENTER CONTACT	BRASS	GOLD 1.3 OVER COPPER 2.5
INSULATOR	PTFE	-
GASKET	SILICONE RUBBER	-
OTHERS PIECES	BRASS	GOLD 0.2 OVER NICKEL 2

TRIQUES

ISSUE	CREATION DATE	FILE PART-NUMBER
9847A00	17/06/1996	96-1200-065


RADIALL®

The information given here is subject to change without notice.
 Design changes may be in order to improve the product .


Connect to the future



R124.154.003

ISSUE **9847A00**


SERIES
SMA-COM

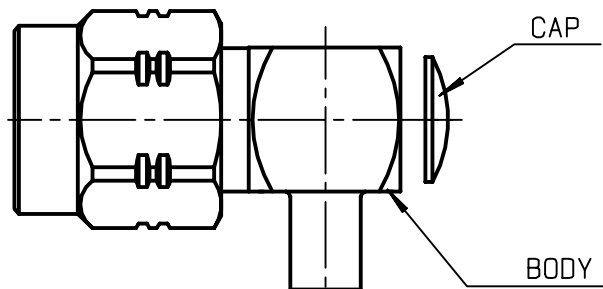

We recommend a cable thermal preconditionning before assembly.

①


Strip the cable .
Stripping tool R 282.053.000
Positioner R 282.067.000



Stripping	a	b	c	d	e
inch	0.125	0	0	0	0
mm	3.17				

②

- 2-1 Introduce the cable into the connector body until it stops. Place the sub assembly into the assembly jig R 282.740.000 (or equivalent) with positioner R 282.744.201 and tighten it.
- 2-2 Solder the body onto the cable.
- 2-3 Let the assembly cool down before removing it from the jig .

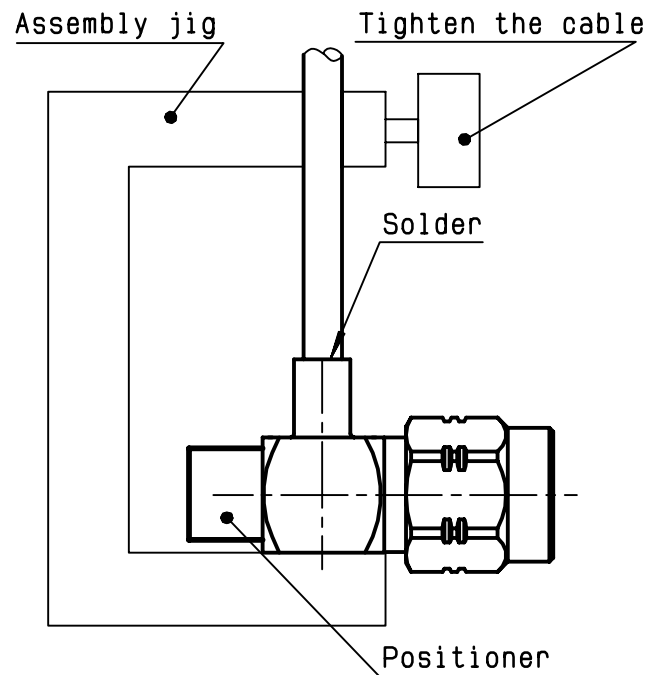

③

- 3-1 Solder inner conductor.
- 3-2 Put the cap in its place.
- 3-3 Press cap flush or slightly below surface of body assembly.

