

THIS DRAWING IS UNPUBLISHED.
RELEASED FOR PUBLICATION
ALL RIGHTS RESERVED.
© COPYRIGHT - By -

LOC FT DIST 0
P LTR
K18 REVISED PER ECO-11-004587
11MAR11 RK HMR

PHYSICAL PROPERTIES:
HOUSING MATERIAL: THERMOPLASTIC, PC
FLAMABILITY: UL94V-0
COLOR: BLACK


TERMINAL:
TERMINALS: BRASS, TIN PLATED
SCREWS: 6-32 STEEL, NICKEL PLATED


MECHANICAL:
PITCH: .437
WIRE RANGE: 14-22 AWG
RECOMMENDED TIGHTENING TORQUE: 12IN-LB

ELECTRICAL PROPERTIES:
MAX CURRENT: 25A
OPERATING VOLTAGE: 300V

ENVIRONMENTAL PROPERTIES:
OPERATING TEMP: -40°C TO 120°C

- 1 SEE FIGURE.
- 2 PRELIMINARY PART NUMBER.
- 3 STAINLESS STEEL SCREWS.
- 4 WHITE INK STAMP.
- 5 TE CONNECTIVITY LOGO LOCATED APPROXIMATE AREA.

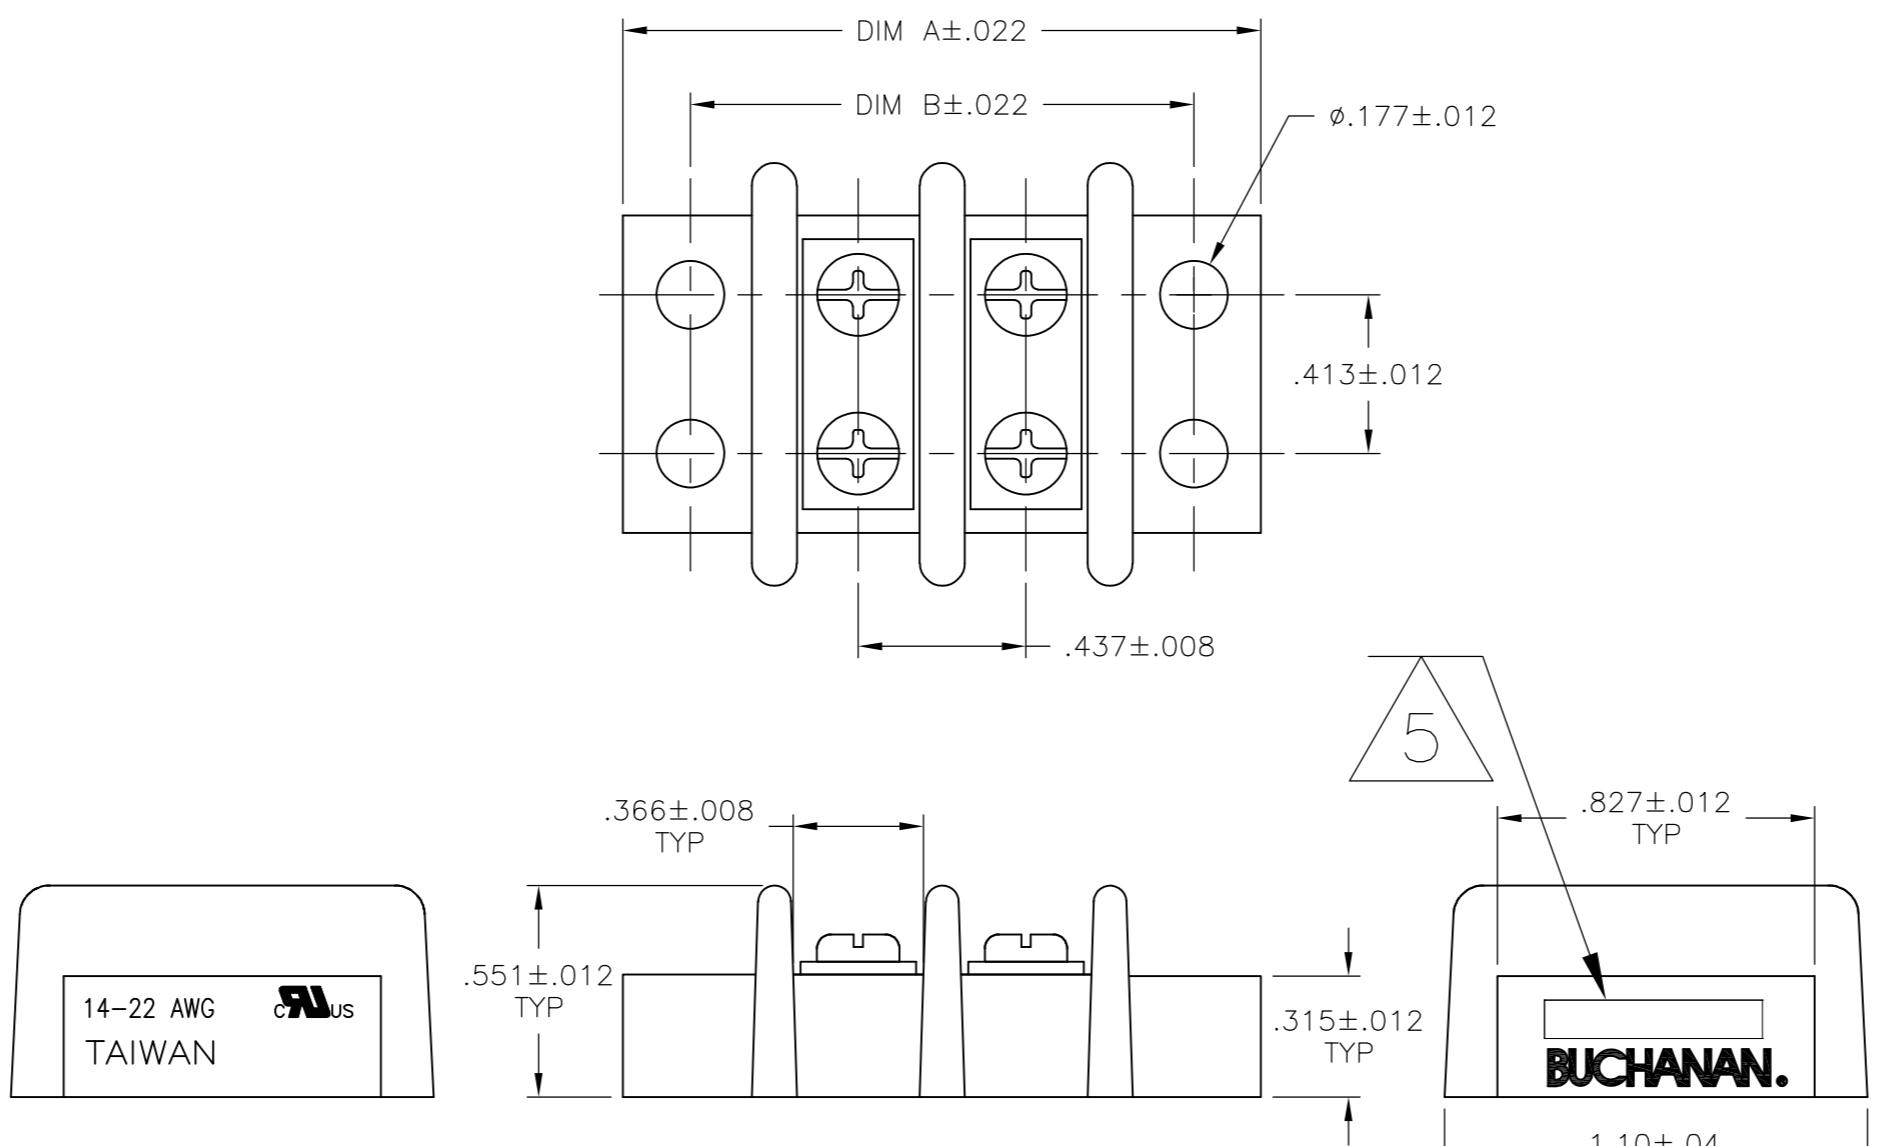



THIS DRAWING IS A CONTROLLED DOCUMENT.		4/4/03
S SCHEGEL 4/4/03		CHK 4/4/03
C RICHARD 4/4/03		APVD 4/4/03
C RICHARD 4/4/03		PRODUCT SPEC
 0 PLC ± - 1 PLC ± - 2 PLC ± .01 3 PLC ± .005 4 PLC ± - ANGLES ± 3°		APPLICATION SPEC
MATERIAL - FINISH -		WEIGHT -
CUSTOMER DRAWING		SCALE NTS
A2 00779 C-1546670		RESTRICTED TO
1471-9 (3/11)		1 OF 3 REV K18

5.646	5.992	12	4-1546670-2
9.142	9.488	20	2-1546670-0
8.705	9.051	19	1-1546670-9
8.268	8.614	18	3-1546670-0
8.268	8.614	18	1-1546670-8
7.831	8.177	17	1-1546670-7
7.394	7.740	16	1-1546670-6
6.957	7.303	15	1-1546670-5
6.520	6.866	14	1-1546670-4
6.083	6.429	13	1-1546670-3
5.646	5.992	12	1-1546670-2
5.209	5.555	11	1-1546670-1
4.772	5.118	10	4-1546670-3
4.772	5.118	10	3-1546670-8
4.772	5.118	10	1-1546670-0
4.335	4.681	9	3-1546670-5
4.335	4.681	9	3-1546670-2
4.335	4.681	9	1546670-9
3.898	4.244	8	4-1546670-1
3.898	4.244	8	3-1546670-6
3.898	4.244	8	3-1546670-4
3.898	4.244	8	3-1546670-3
3.898	4.244	8	1546670-8
3.461	3.807	7	1546670-7
3.024	3.370	6	3-1546670-1
3.024	3.370	6	1546670-6
2.587	2.933	5	2-1546670-8
2.587	2.933	5	2-1546670-7
2.587	2.933	5	1546670-5
2.496	2.933	4	3-1546670-9
2.150	2.496	4	2-1546670-9
2.150	2.496	4	1546670-4
1.713	2.059	3	1546670-3
1.276	1.622	2	1546670-2
DIM B	DIM A	NO OF POS	PART NUMBER


TE	TE Connectivity								
NAME	DOUBLE ROW BARRIER STRIP W/ BINDING HD SCREW, .437 SPACING								
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	A2 00779 C-1546670	—	CUSTOMER DRAWING	SCALE NTS	SHEET 1 OF 3	REV K18
DRAWING NO	RESTRICTED TO								
A2 00779 C-1546670	—								
CUSTOMER DRAWING	SCALE NTS								
SHEET 1 OF 3	REV K18								

THIS DRAWING IS UNPUBLISHED.
RELEASED FOR PUBLICATION
ALL RIGHTS RESERVED.
© COPYRIGHT - By -



REVISIONS
LOC FT DIST 0
P LTR - SEE SHEET 1
DESCRIPTION DATE DWN APVD

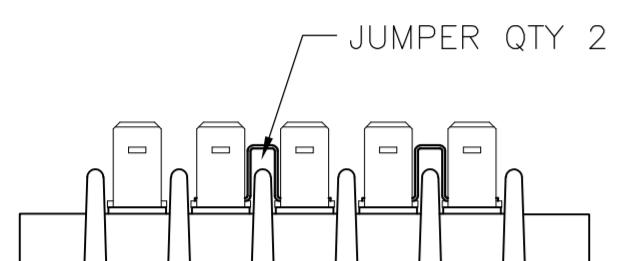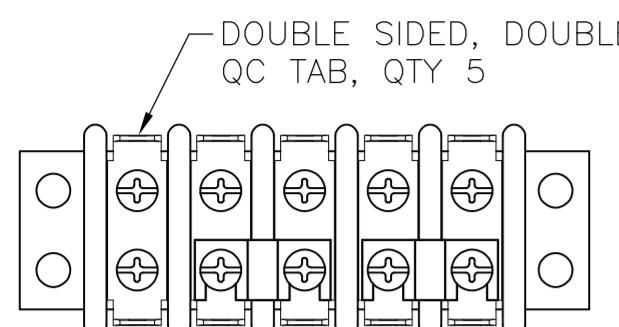



2-1546670-7

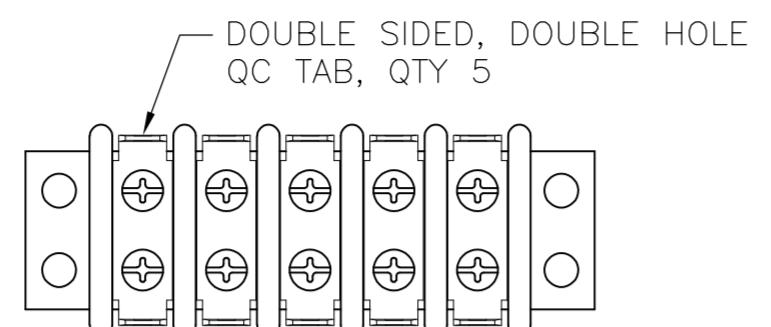



2-1546670-8

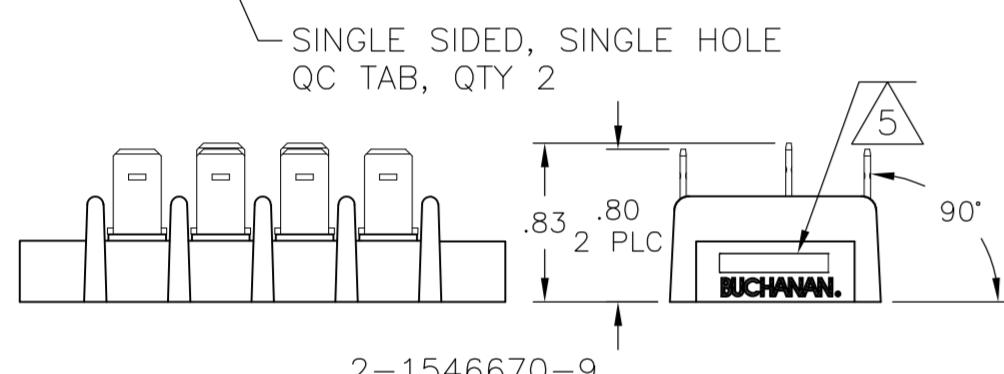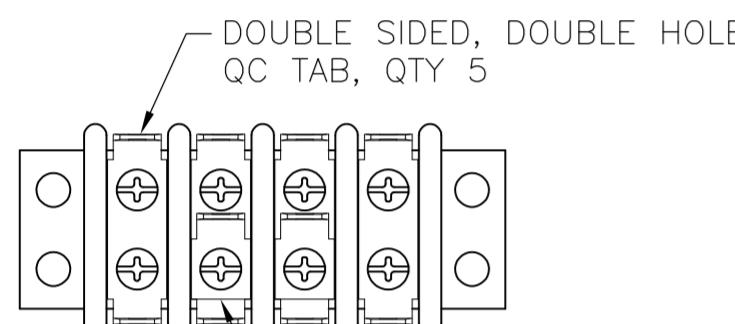



2-1546670-9

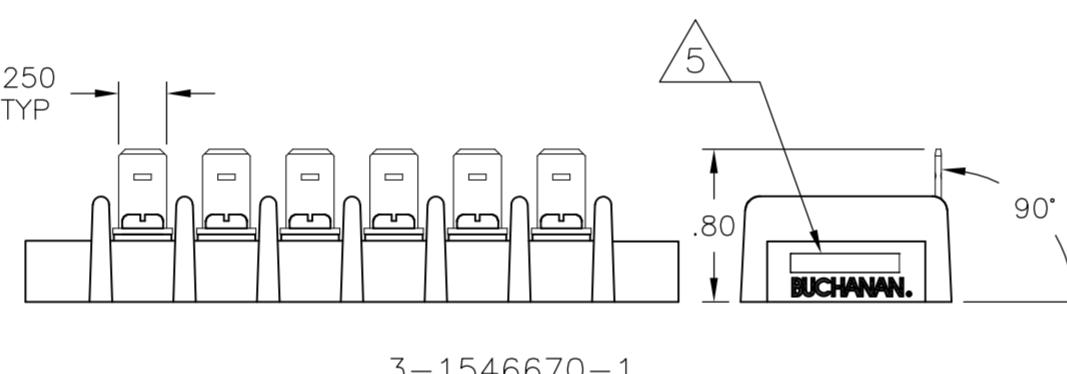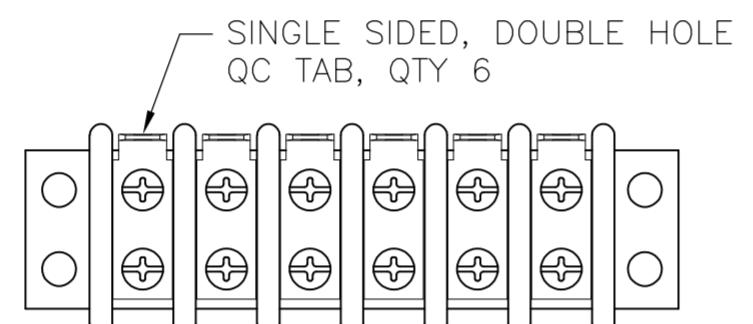



3-1546670-1

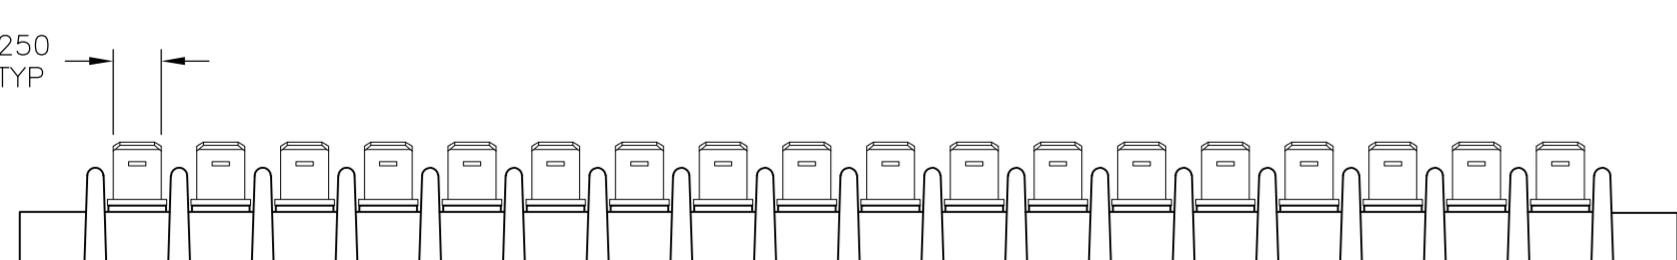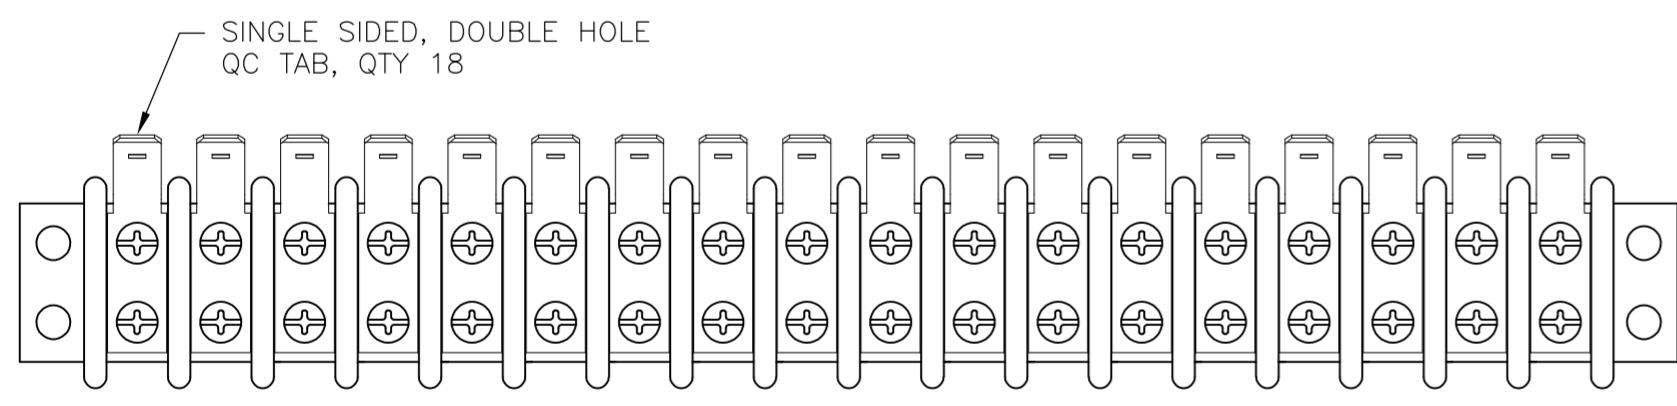



3-1546670-0

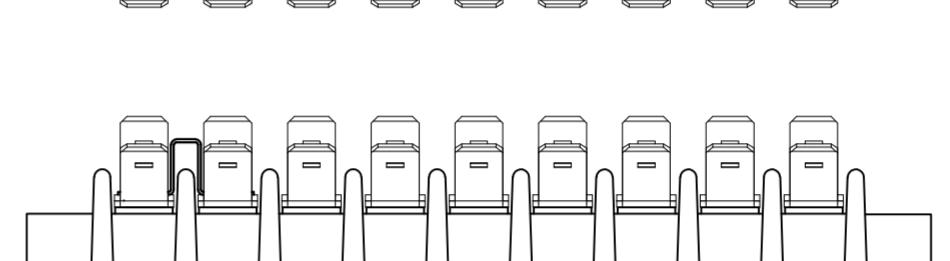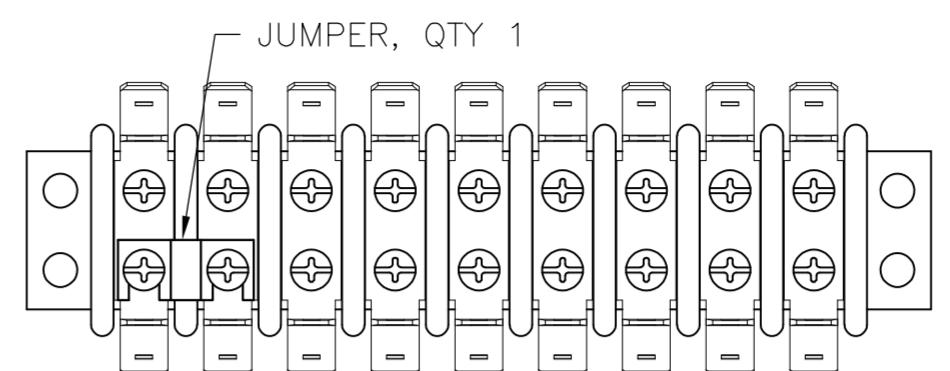


3-1546670-2

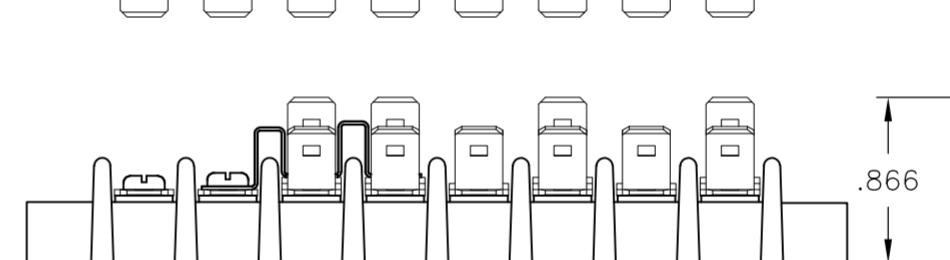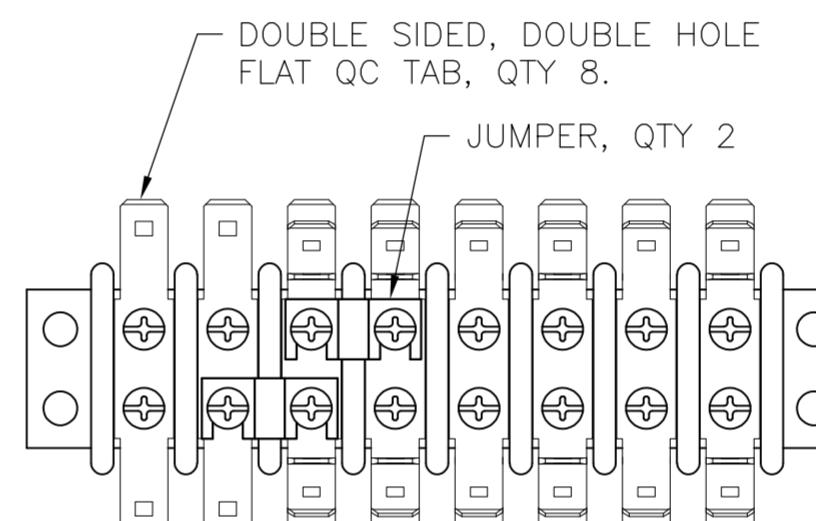


3-1546670-3

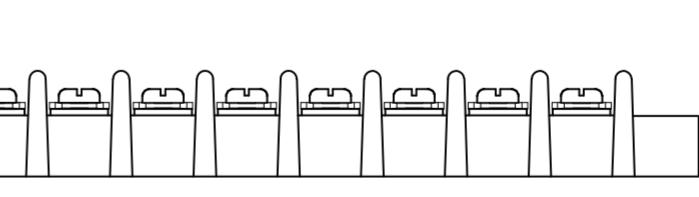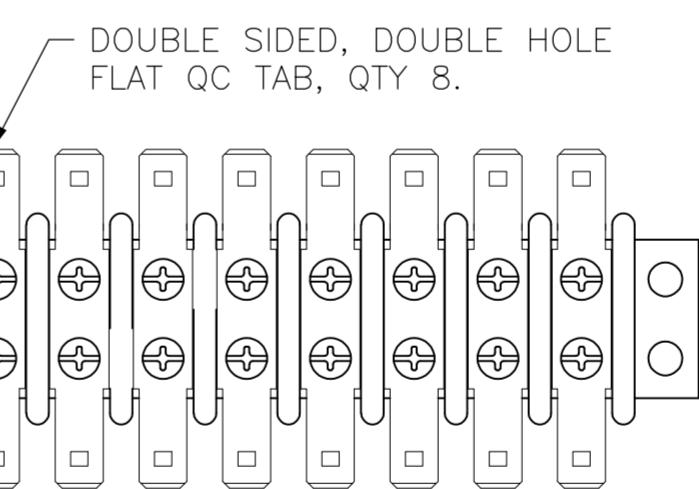

3-1546670-4

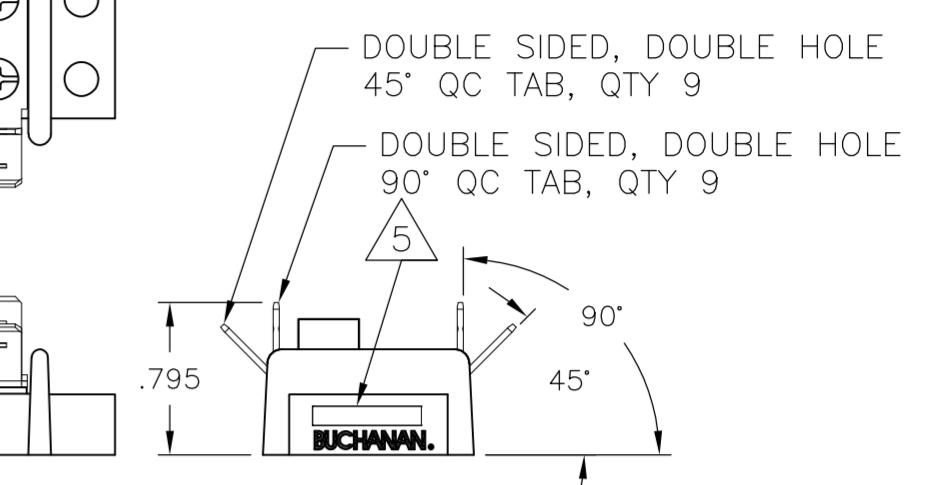

3-1546670-5

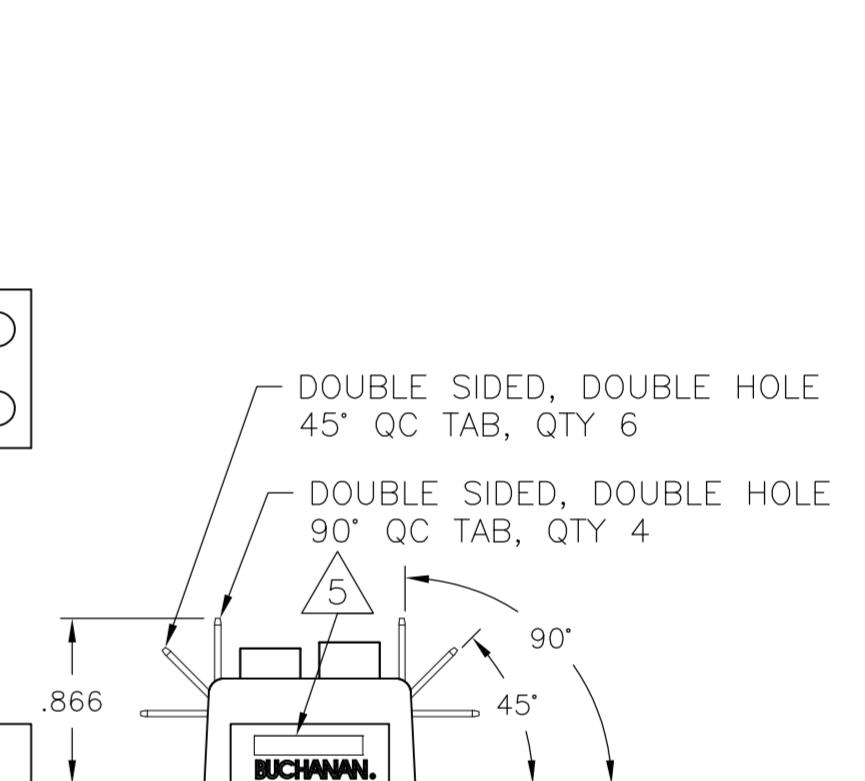

DIM B	DIM A	NO OF POS	PART NUMBER
11.764	12.110	26	2-1546670-6
11.327	11.673	25	2-1546670-5
10.90	11.236	24	2-1546670-4
10.453	10.799	23	2-1546670-3
10.016	10.362	22	2-1546670-2
9.579	9.925	21	2-1546670-1
9.142	9.488	20	3-1546670-7

DIM B DIM A NO OF POS PART NUMBER

TE Connectivity

NAME: DOUBLE ROW BARRIER STRIP W/ BINDING HD SCREW, .437 SPACING

SIZE CAGE CODE DRAWING NO RESTRICTED TO




A2 00779 C-1546670 —

SCALE NTS SHEET 2 OF 3 REV K18


THIS DRAWING IS A CONTROLLED DOCUMENT.	
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC	\pm -
1 PLC	\pm -
2 PLC	\pm .01
3 PLC	\pm .005
4 PLC	\pm -
ANGLES	\pm 3°
MATERIAL	FINISH
WEIGHT	—
CUSTOMER DRAWING	

THIS DRAWING IS UNPUBLISHED.
RELEASED FOR PUBLICATION
ALL RIGHTS RESERVED.
© COPYRIGHT - By -


REVISIONS
LOC FT DIST 0
P LTR - SEE SHEET 1
DESCRIPTION DATE DWN APVD

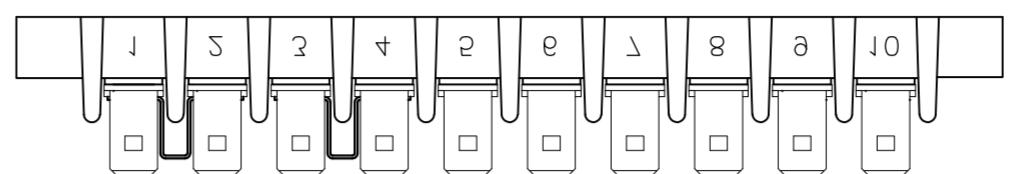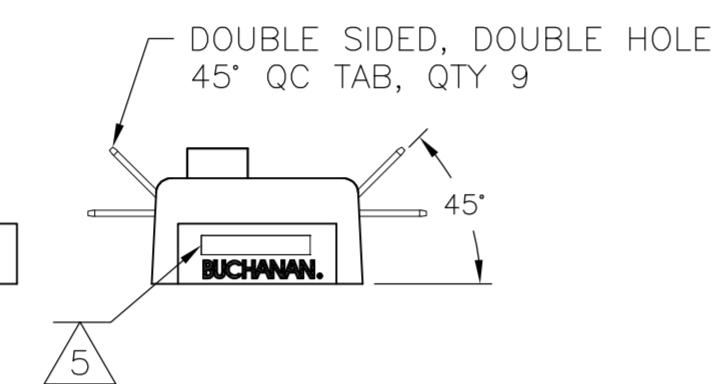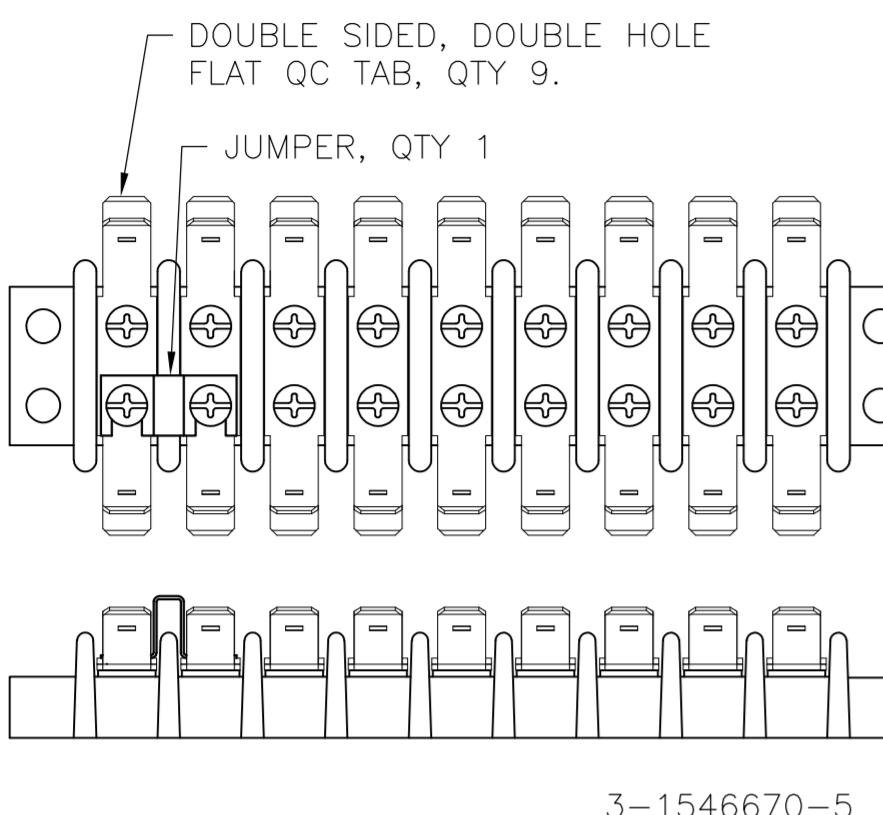



SINGLE SIDED, DOUBLE HOLE
45° QC TAB, QTY 10

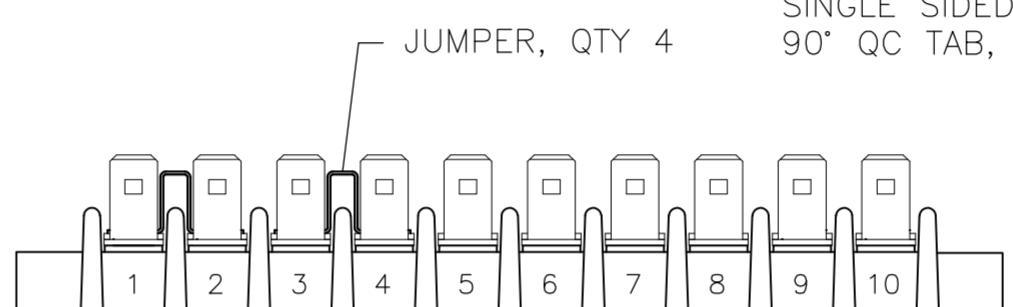



SINGLE SIDED, DOUBLE HOLE
90° QC TAB, QTY 10

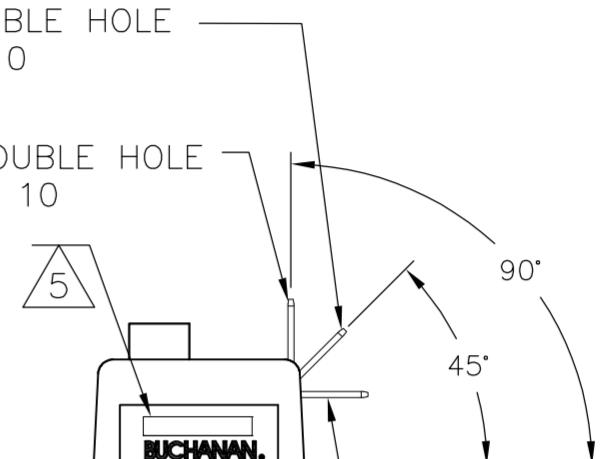


SINGLE SIDED, DOUBLE HOLE
FLAT QC TAB, QTY 10

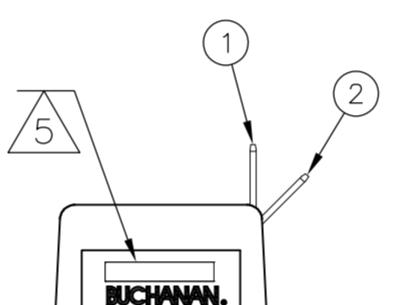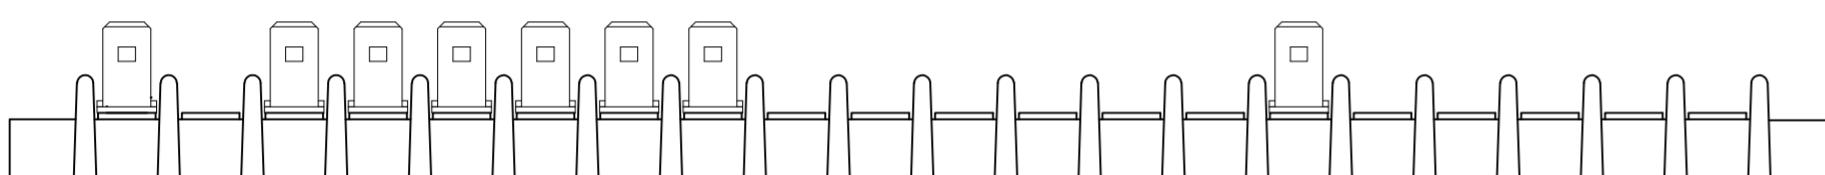



3-1546670-7

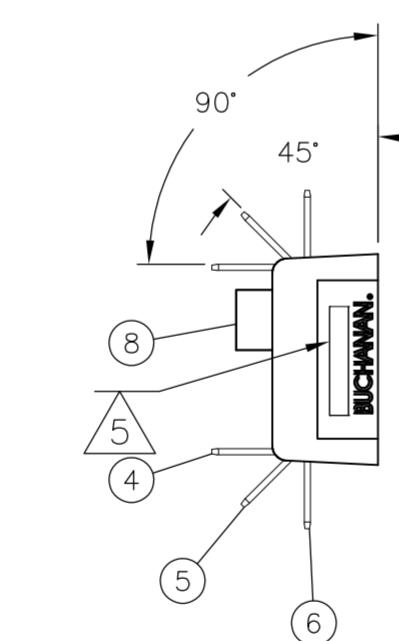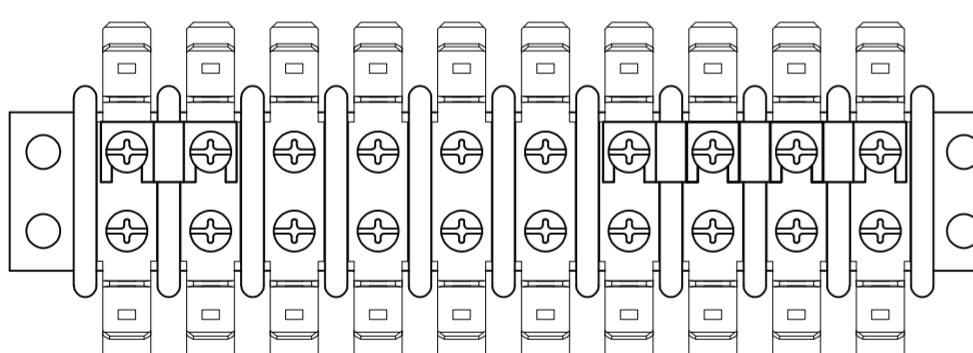

3-1546670-8

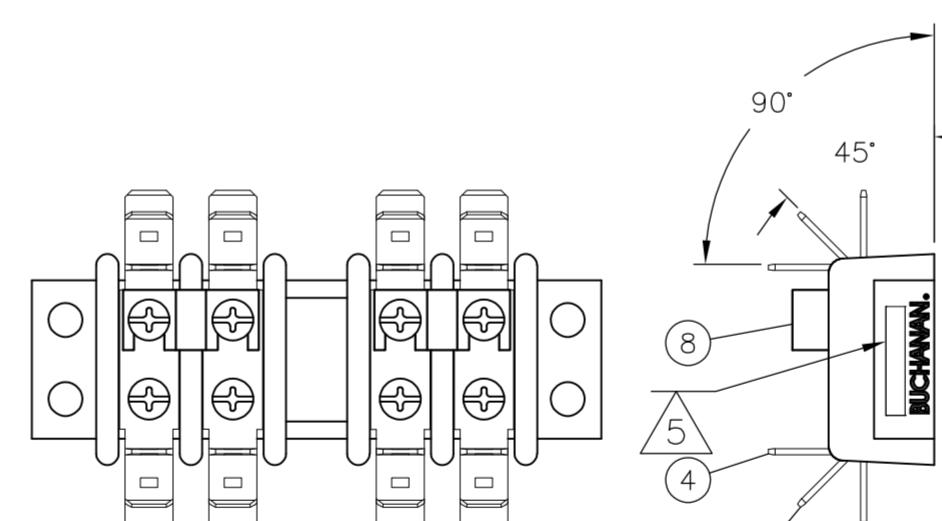

3-1546670-9

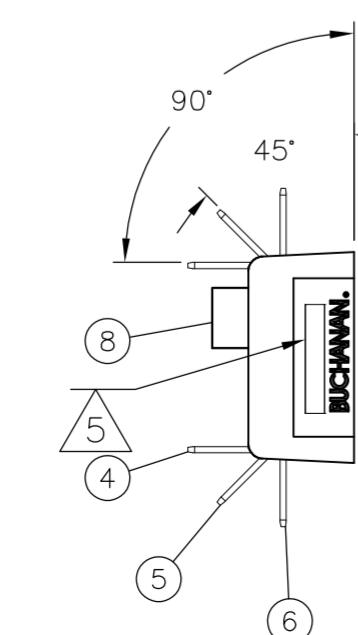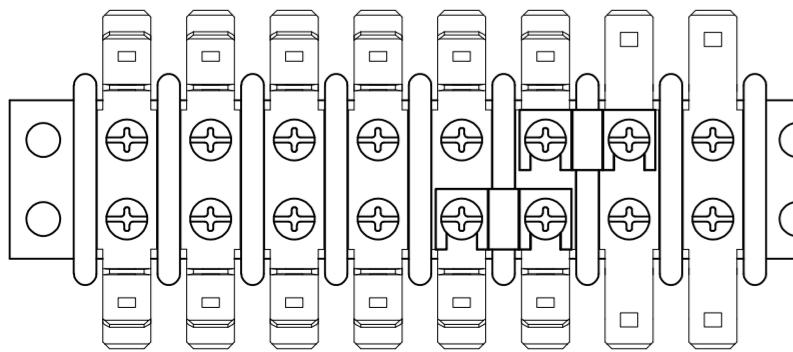

4-1546670-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
0 PLC	± -	1 PLC	4/4/03
1 PLC	± -	2 PLC	S SCHEGEL 4/4/03
2 PLC	± .01	3 PLC	CHK 4/4/03
3 PLC	± .005	4 PLC	C RICHARD 4/4/03
4 PLC	± -	ANGLES	APVD C RICHARD 4/4/03
			PRODUCT SPEC
			—
		APPLICATION SPEC	—
		FINISH	—
MATERIAL	—	WEIGHT	—
		CUSTOMER DRAWING	—
		SCALE	NTS
		SIZE	A2
		CAGE CODE	00779
		DRAWING NO	C-1546670
		RESTRICTED TO	—



TE Connectivity

DOUBLE ROW BARRIER STRIP W/ BINDING HD
SCREW, .437 SPACING

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1546670-0](#)