


1-1564516-1 Product Details

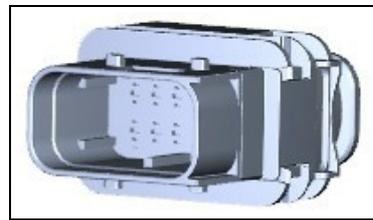

1-1564516-1

TE Internal Number: 1-1564516-1
Active

[View 3D PDF](#)

Multiple Contact Point (MCP) & MCON Contact Systems

Always EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:

- HDSCS Product Line, Multiple Contact Point (MCP) Product Line
- Wire-to-Wire
- Applies To Wire/Cable
- Connector
- Housing

[View all Features](#)

Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

[Add to My Part List](#) |
 [Request Sample](#) |
 [Find Similar Products](#) |
 [Buy Product](#)

Documentation & Additional Information

Product Drawings:

- [10 POS,TAB 1.6x0.6/2.8x0.8 TAB HSG, ASSY 10pos. TAB ... \(PDF, English\)](#)

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files: (CAD Format & Compression Information)

- [2D Drawing \(DXF, Version H\)](#)
- [3D Model \(IGES, Version H\)](#)
- [3D Model \(STEP, Version H\)](#)

[List all Documents](#)

Related Products:

- [Tooling](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- Product Line = HDSCS, Multiple Contact Point (MCP)
- Product Type = Connector
- Connector Type = Housing
- [Wire/Cable Type](#) = FLR (Thin Walled Cable)
- PCB Mount Retention = Without
- Key Type = Standard
- Sealed = Yes

Mechanical Attachment:

- Contact Retention = With
- Contact Retention Type = Secondary Locking/Retainer
- Mating Retention Type = Latching
- Panel Mount Retention = Without

Electrical Characteristics:

- Operating Voltage (VDC) = 42
- Operating Voltage Reference = DC

Termination Features:

- Termination Method to Wire/Cable = Crimp
- Seal Type = Radial Seal

Dimensions:

- Mating Area Interface Dimensions (mm [in]) = 1.60 [.063], 2.79 [.110]

Body Features:

- Cable Exit Angle = 180°

Housing Features:

- Connector Style = Plug
- Housing Material = PBT - GF30
- Housing Color = Black
- Mating Alignment = With
- Mating Alignment Type = Keyed

Configuration Features:

- Number of Positions = 10
- Number of Sections = 1
- Number of Positions/Section = 6+4
- Strain Relief = Without

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant
- UL Flammability Rating = UL 94V-0

Identification Marking:

- Keying = A

Environmental:

- Operating Temperature (°C [°F]) = -40 - +140 [-40 - +284]

Conditions for Usage:

- Applies To = Wire/Cable

Operation/Application:

- Mating Retention = With
- Wire Type = Stranded
- Seal Material = Silicone
- Seal Color = White
- Used With = Receptacle Housing with Cover

- Application Use = Wire-to-Wire

Packaging Features:

- Packaging Method = Box/Carton
- Packaging Quantity = 168

Other:

- Brand = TE Connectivity
- Comment = IP67 and IP69K

Contact Features:

- Contact Type = Tab
- Multiple Contact Types = With

Corporate Information

- [About TE](#)
- [Investors](#)
- [News Room](#)
- [Supplier Portal](#)
- [Careers](#)
- [Terms & Conditions](#)
- [Privacy Policy](#)
- [AODA Accessibility Policy](#)
- [AODA Multi-Year Accessibility Plan](#)

Quick Links

- [Distributor Inventory](#)
- [Product Cross Reference](#)
- [Documents & Drawings](#)
- [Product Compliance Support Center](#)
- [Site Map](#)

Customer Support

- [Email or Chat With Us](#)
- [Find a Phone Number](#)
- [Knowledge Base](#)
- [Manage Your Account](#)

Keep Me Informed

