## **Electrical Capacity (Resistive & Inductive Load)**

**Power Level:** Shown in the following table

**Ratings** 

**Contact Resistance:** 10 milliohms maximum

**Insulation Resistance:** 200 megohms minimum @ 500V DC 1,500V AC minimum for 1 minute minimum Dielectric Strength:

GENERAL SPECIFICATIONS FOR \$100s

Mechanical Life: 30,000 operations minimum **Electrical Life:** 10,000 operations minimum

Operating Temp Range: -10°C through +70°C (+14°F through +158°F)

**Materials & Finishes** 

Brass with chrome plating Toggle:

**Bushing:** Brass with chrome or nickel plating

Case: Phenolic resin

Case Cover: Steel with zinc plating **Movable Contactor Plate:** Copper with silver plating

Silver alloy plus copper with silver plating **Movable & Stationary Contacts:** 

> Terminals: Copper with silver plating

Installation

2.94Nm (26 lb•in) for double nut **Mounting Torque:** 

Manual Soldering: See Profile A in Supplement section. **Soldering Time & Temperature:** 

**Standards & Certifications** 

CSA: File No. 023535\_0\_000

Certified at 5A @ 125V AC & 2A @ 250V AC.

Add "/C" to end of part number to order CSA mark on switch.

Keylocks Programmable Illuminated PB Pushbuttons

\_\_(0.8) Typ .031

Maximum Panel Thickness:

.158" (4.0mm)

(0.3) Typ


Touch

Supplement Accessories

DOUBLE POLE WITH SOLDER LUG*													
				Toggle Position/Connected Terminals					Electrical Capacity				
	*Approvals			Down		Center	Up		Resistive			Inductive	
Model	lR,	<b>(1)</b>	Pole & Throw	Keyway - <sub>1</sub>		-	-		AC 125V	AC 250V	DC 30V	AC 125V PF 0.6	Angle of Throw
\$114	_	/	DPST	ON	2-1 5-4	NONE	OFF	_	5A	2A	5A	3A	25°
\$116	_	/	DPDT	ON	2-1 5-4	NONE	ON	2-3 5-6	5A	2A	5A	3A	25°
S116R	_	_	DPDT	ON	2-1 5-4	NONE	ON	2-3 5-6	5A	2A	5A	3A	25°
Throw & Schematics:		DPST	2 (COM) 5 •			DPDT 2 (COM) 5 • 1 • 3 4 • 6				Note: Terminal numbers are actually on the switch			

Notes: Standard Hardware: AT504M Knurled Nut, AT508 Lockwasher, AT527M Backup Hex Nut. See Accessories & Hardware section. Optional Splashproof Boot Assemblies (only for bat lever models): AT401 & AT4181 boots plus hex nut and o-ring. See Accessories & Hardware section.

- \* See General Specifications page for approval marking.
- \* Wire harness & cable assemblies offered only in Americas.

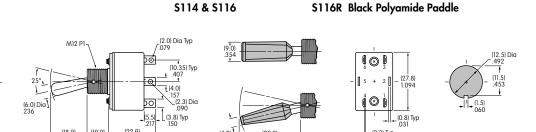

**S116** S114 does not have terminals 3 & 6

