

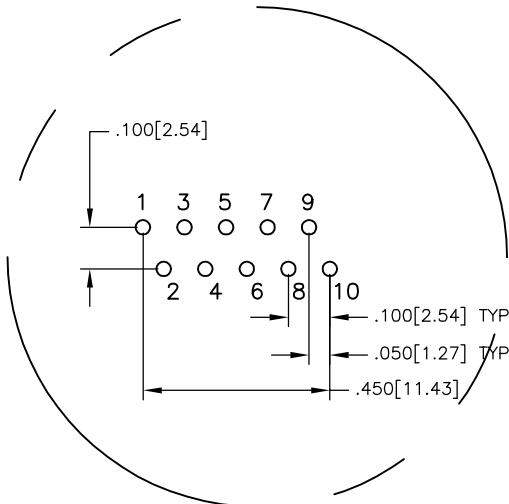


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	K	LOGO CHANGE	23APR2013	JC	KZ

MECHANICAL:

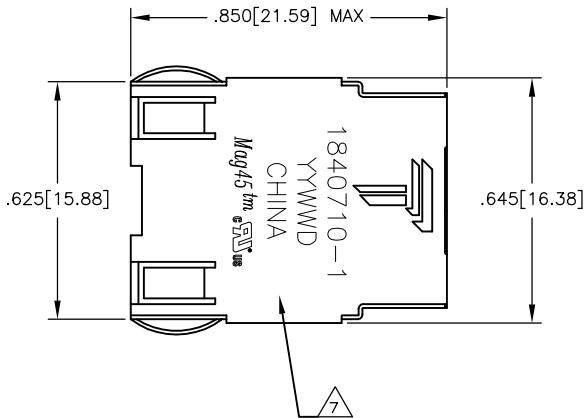


Pin Designations

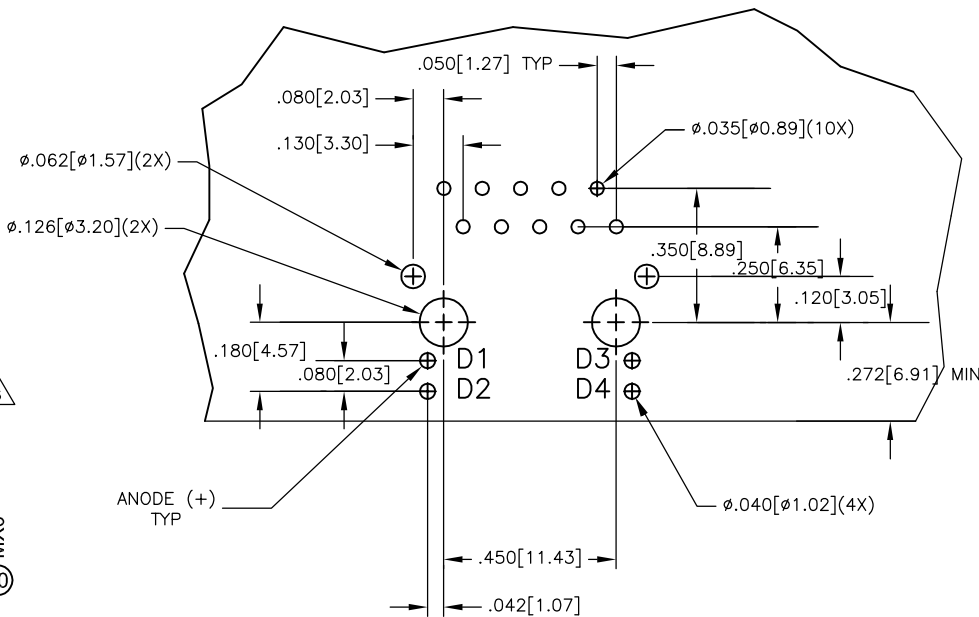


Suggested PCB Layout


(Component Side)

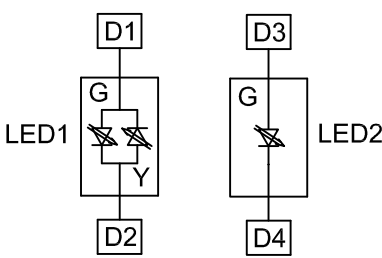


LED For 1840710-5

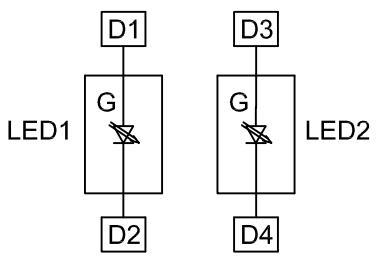


LED For 1840710-1, 1-1840710-1

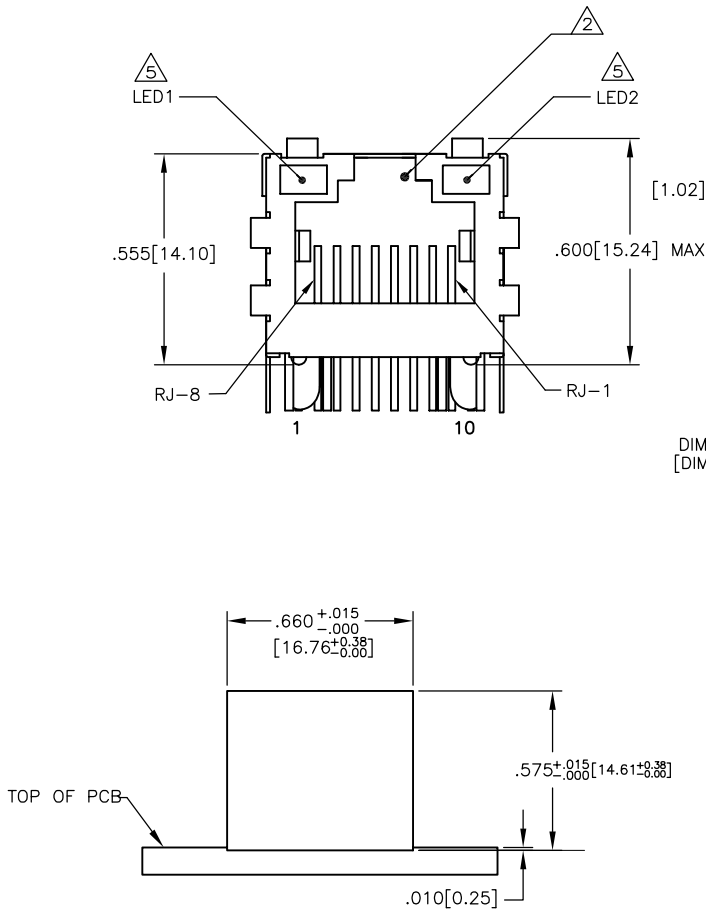

Suggested Panel Cutout

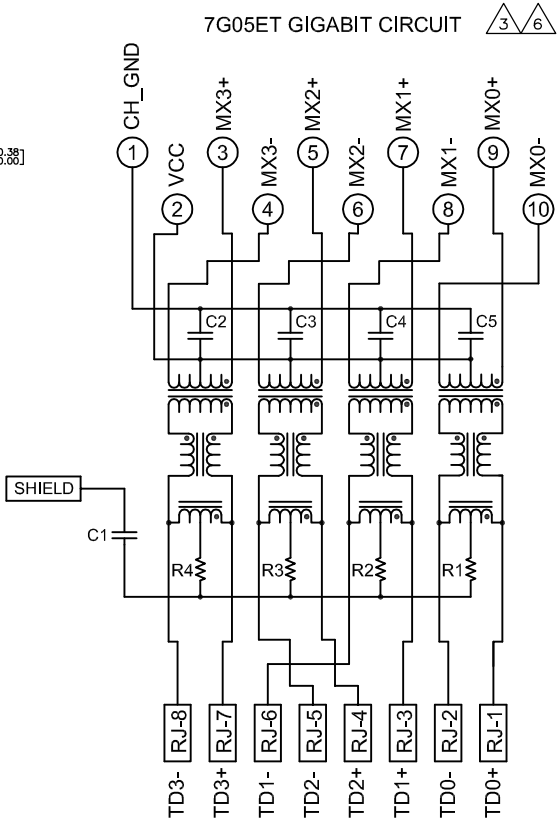

C1 = 1000 pF, 2kV CAPACITOR
R1-R4 = 75 OHMS, 1/16 W RESISTORS
C2-C5 = 0.1 uF, 50V, X7R CAPACITORS

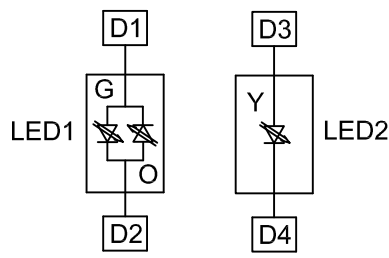

LED For 1-1840710-3, 2-1840710-3

NORMAL TEMPERATURE	0.90[2.29]	GREEN/ORANGE	YELLOW	2-1840710-3
NORMAL TEMPERATURE	0.145[3.68]	GREEN/ORANGE	YELLOW	1-1840710-3
HIGH TEMPERATURE	0.145[3.68]	GREEN	GREEN	1-1840710-1
NORMAL TEMPERATURE	0.145[3.68]	GREEN/YELLOW	GREEN	1840710-5
NORMAL TEMPERATURE	0.145[3.68]	GREEN	GREEN	1840710-1
HOUSING MATERIAL	DIM A	LED1 	LED2 	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN KEITH ZHU 1900C05 CHK MICHAEL ZHANG APD TEDDY XIONG 1900C05		 TRP connector Dongguan China	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME 1X1 MAG45(TM), MODULAR JACK, 70G5ET CIRCUIT, SHIELDED, WITH LEADS	
0 P.L.C. ± 1 P.L.C. ± 2 P.L.C. ±.010(0.25) 3 P.L.C. ±.000(0.15) 4 P.L.C. ANGLES ±.1		PRODUCT SPEC 108-2100 APPLICATION SPEC		SIZE CASE CODE DRAWING NO A1 C=1840710	
MATERIAL 		FINISH 		RESTRICTED TO —	
CUSTOMER DRAWING		SCALE NTS		SHEET 1 OF 1 REV. K	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Bel:

[1840710-5](#) [1-1840710-3](#)