

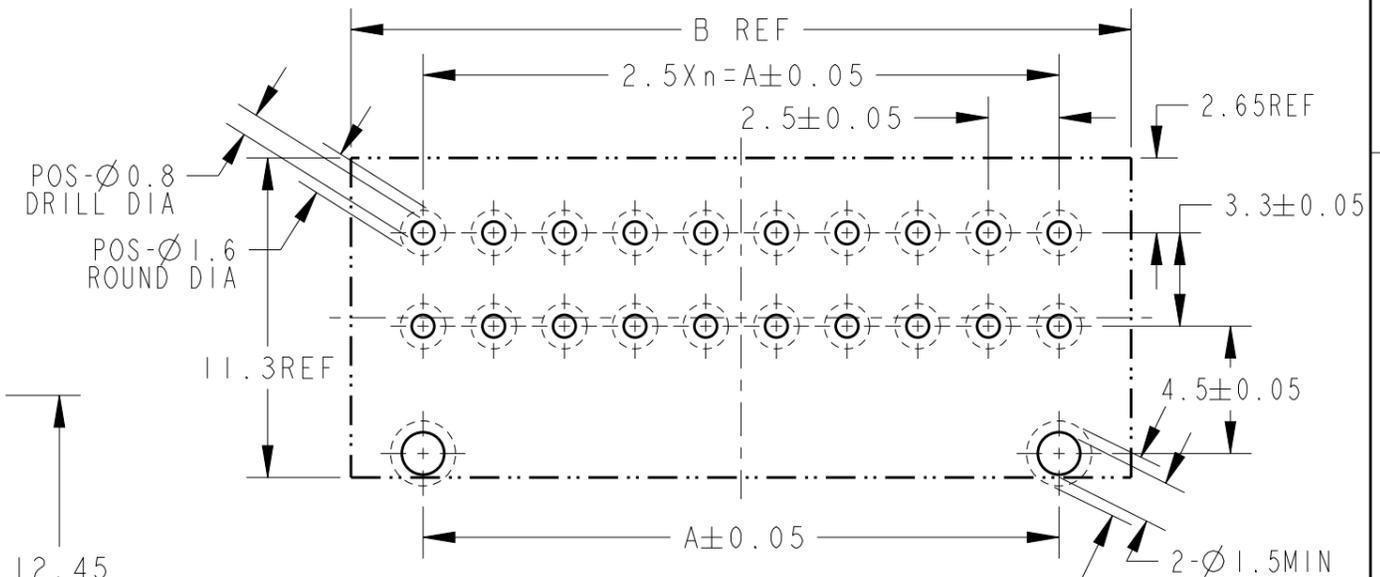
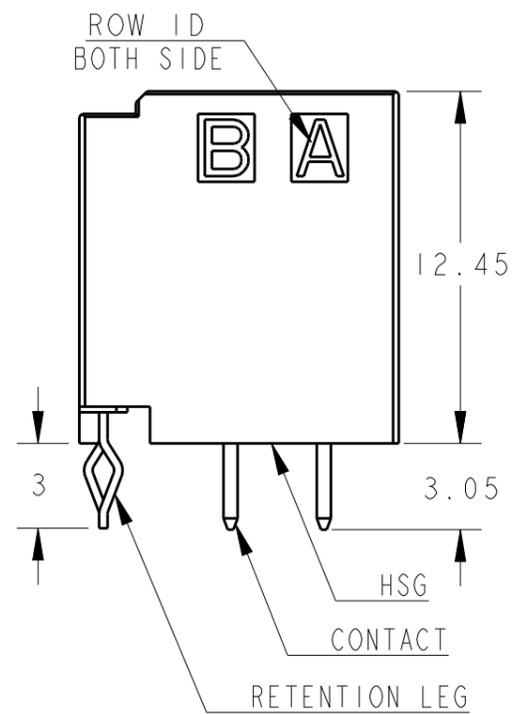
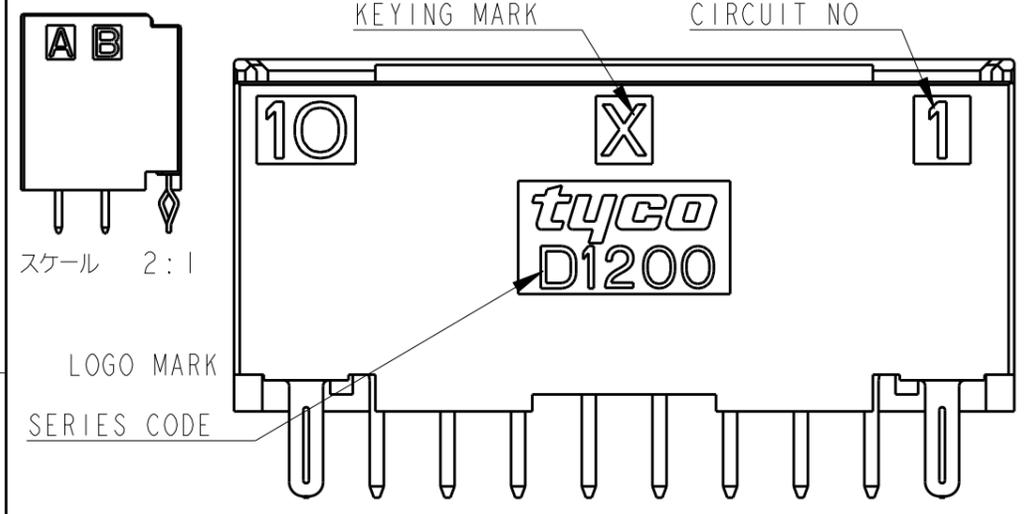


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY Tyco Electronics Japan G.K. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
J	-		C	REVISED	18DEC2012	H.M	N.Y

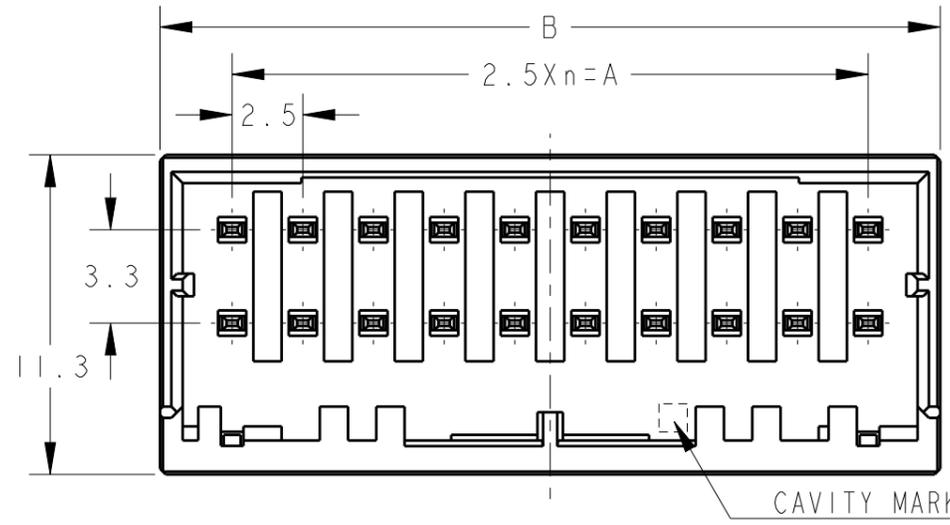

RECOMMEND PC BOARD HOLE PATTERN : CONNECTOR MOUNT SIDE (NOT ACCUMULATE TOLERANCE)
 PC BOARD THICKNESS : 1.0~1.6±0.1
 推奨基板取付穴寸法 : コネクタ搭載面(非累積公差)
 PC基板厚 : 1.0~1.6±0.1

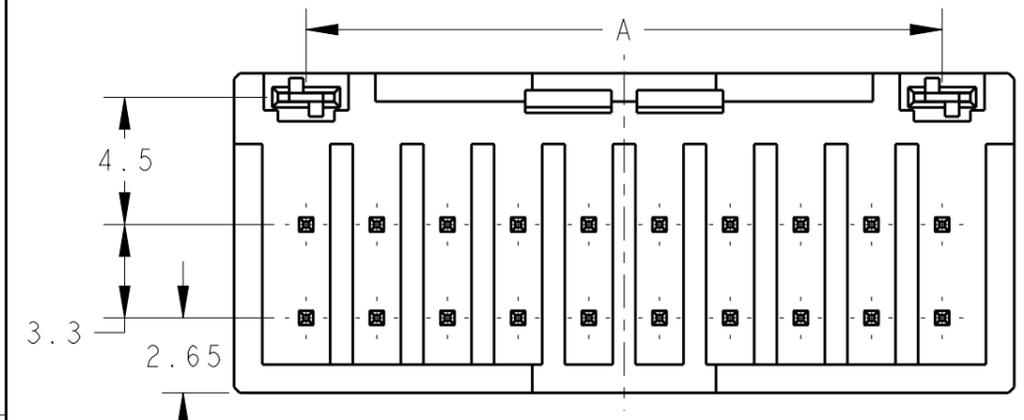

△. 材料:ハウジング:ガラス入り熱可塑性ポリエステル樹脂(94V-0)、色:黒
 コンタクト:錫めっき済銅合金
 リテンションレグ:錫めっき済銅合金
 2. 文字の形状、大きさ、および位置については、大略を示すものであり、
 詳細を示すものではありません。

△. MATERIAL: HOUSING: GLASS FILED THERMO PLASTIC POLYESTER(94V-0), COLOR: BLACK
 CONTACT: PRE-TIN COPPER ALLOY
 RETENTION LEG: PRE-TIN COPPER ALLOY
 2. THE SHAPE, SIZE AND POSITION OF THE CHARACTER SHOW THE OUTLINE. THEY DON'T SHOW DETAILS.

AS SHOWN : 20POS(X-KEY)

12	X	5	12.5	17.6	1-2040558-6
10	X	4	10.0	15.1	1-2040558-5
6	X	2	5.0	10.1	1-2040558-3
4	X	1	2.5	7.6	1-2040558-2
POS	KEY	n	A	B	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	M. MAEBASHI	13MAY2008	 TE Connectivity
CHK	T. KUDO	13MAY2008	
APVD	S. MANABE	13MAY2008	NAME 名称 DYNAMIC D1200D 2.5mmPITCH HDR ASSY (V-TYPE) TIN PLATE 4-20POS
DIMENSIONS: 単位: 概 mm			PRODUCT SPEC 製品規格 108-78298
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差 ±0.3, ±5° 0-PLC ± 1-PLC ±0.5 2-PLC ±0.13 3-PLC ±0.013 4-PLC ±0.0001 ANGLES ±			APPLICATION SPEC 取付適用規格 114-5377
MATERIAL 材料			WEIGHT -
FINISH 仕上			SIZE A3
CUSTOMER DRAWING			CAGE CODE 00779
SCALE 尺度 4:1			DRAWING NO 番号 C-2040558
SHEET 1 OF 2			RESTRICTED TO -
REV C			

4



3

2










1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY Tyco Electronics Japan G.K. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
J	-	SEE SHEET 1 OF 2				

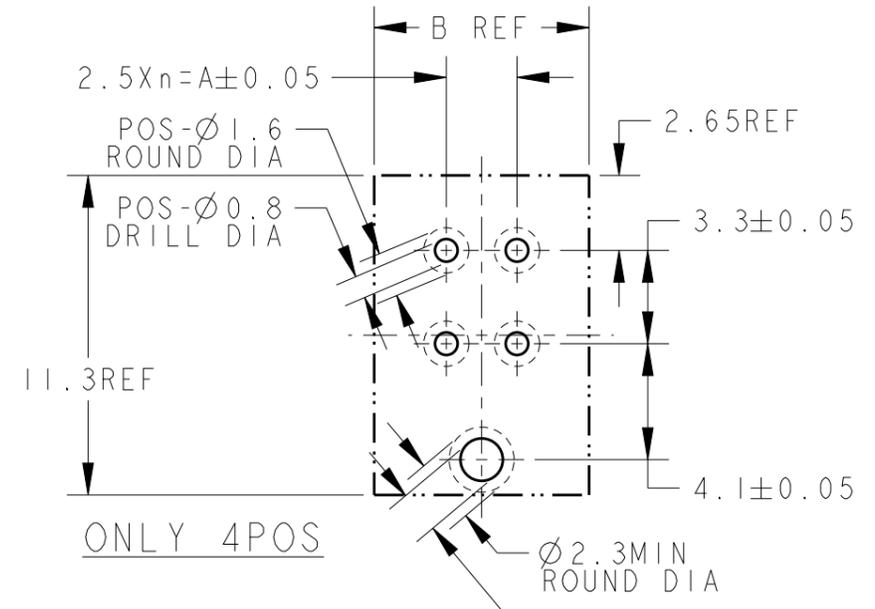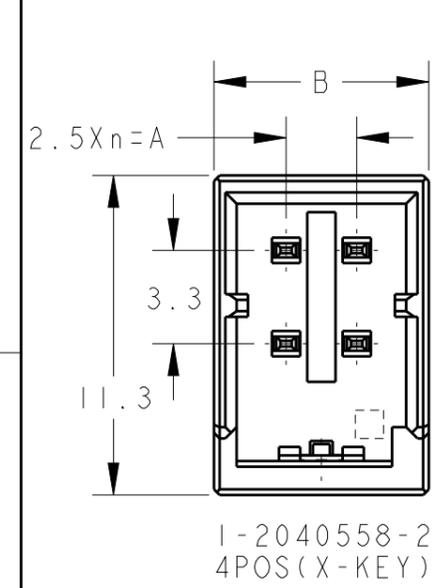

推奨基板取付穴寸法 : コネクタ搭載面 (非累積公差)
 PC基板厚 : 1.0~1.6±0.1
 RECOMMEND PC BOARD HOLE PATTERN : CONNECTOR MOUNT SIDE (NOT ACCUMULATE TOLERANCE)
 PC BOARD THICKNESS : 1.0~1.6±0.1

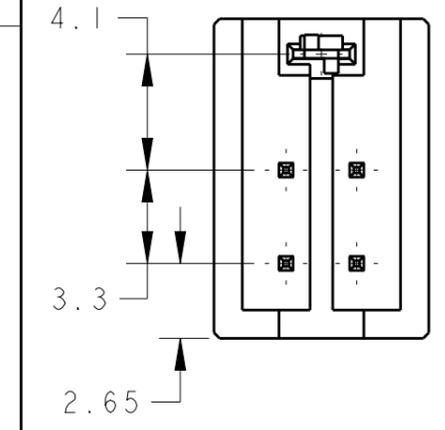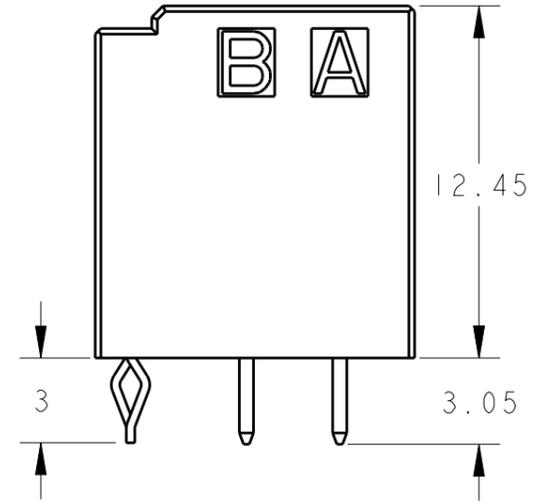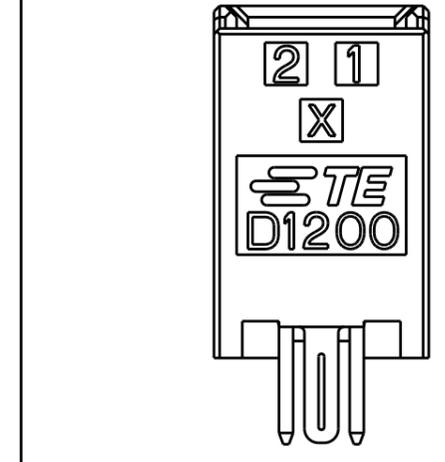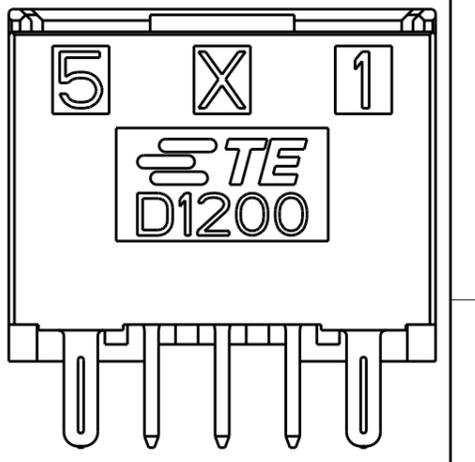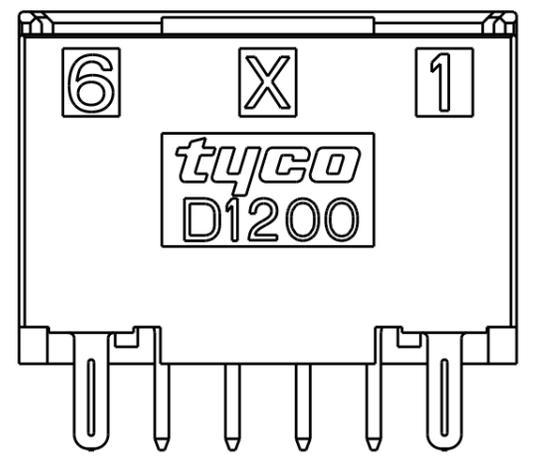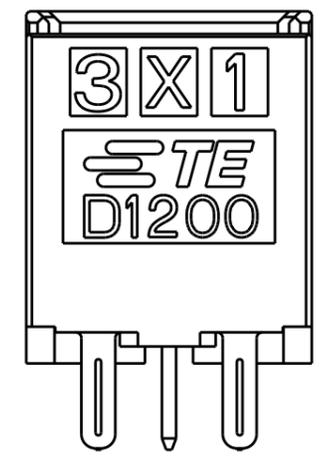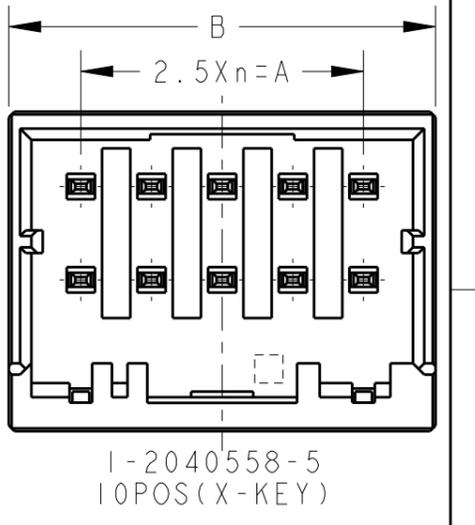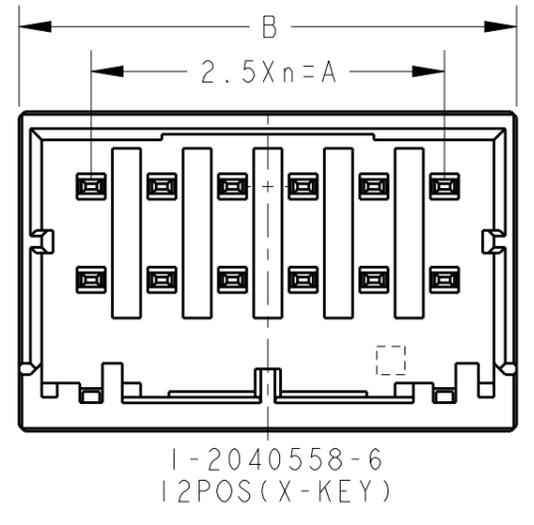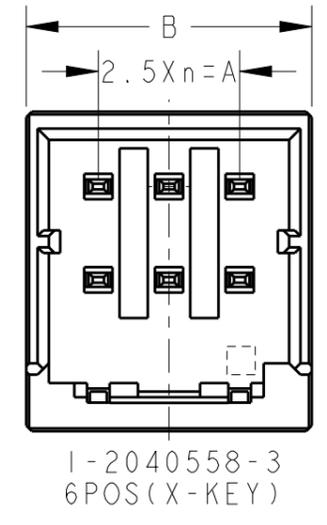

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	0 PLC ±
	1 PLC ±
	2 PLC ±
	3 PLC ±
	4 PLC ±
	ANGLES ±
MATERIAL	FINISH -

SEE SHEET 1 OF 2

DWN	M. MAEBASHI	13MAY2008
CHK	T. KUDO	13MAY2008
APVD	S. MANABE	13MAY2008
PRODUCT SPEC	108-78298	
APPLICATION SPEC	114-5377	
WEIGHT	-	
CUSTOMER DRAWING		

TE Connectivity		NAME		RESTRICTED TO
		DYNAMIC D1200D 2.5mmPITCH HDR ASSY (V-TYPE) TIN PLATE 4-20POS		
SIZE	CAGE CODE	DRAWING NO		
A3	00779	C-2040558		
SCALE 2:1		SHEET 2 OF 2	REV C	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-2040558-6](#)