

# Switching Power Supply

## Type SPD 480W

### DIN rail mounting

CARLO GAVAZZI



- Universal AC single phase input full range
- Installation on DIN rail 7.5 or 15mm
- PFC as standard
- High efficiency up to 90%
- Power ready output
- Parallel connection feature
- Compact dimensions
- UL, cUL listed and TUV/CE approved

### Product Description

The Switching power supplies SPD series are specially designed to be used in all automation application where the

installation is on a DIN rail and compact dimensions and performance are a must.

### Approvals



### Optional Features

Description	code
Plug-in connectors	B

### Ordering Key

**SP D 24 480 1 B**

Model	_____
Mounting ( D = Din rail )	_____
Output voltage	_____
Output power	_____
Input Type	_____
Optional features	_____

Input type: 1= single phase

### Output performances

Model	Output Current (A)	Voltage Trim Range <sup>1)</sup>		DC OK @ Start up (VDC)		Dc low after start up (VDC)		Typical Efficiency
		Min. VDC	Max. VDC	Min.	Max.	Min.	Max.	
SPD24	20	22.5	28.5	17.6	19.4	17.6	19.4	89%
SPD48	10	47.0	56.0	37.0	40.0	37.0	40.0	90%

<sup>1)</sup> When S/P switch is set to parallel, it is not possible to trim output voltage.

### Output data

Line regulation	± 0.5%	Temperature Coefficient	+0,02% / °C
Load regulation		Hold up time Vi = 230Vac	30ms
Non parallel mode	± 0.5%	Minimum load	0%
Parallel mode	± 5%	Parallel Operation	3 units max.
Output Voltage accuracy	+1% (factory adjusted)	(only with S/P switch on "P" position)	
Ripple and Noise	100mV		

Specifications are subject to change without notice

## Input data

<b>Rated input voltage</b>	115/264VAC	<b>Frequency range</b>	47 - 63 Hz
<b>Voltage range</b> AC in DC in	90 - 264 Vac 120 - 370 Vdc	<b>Inrush current</b> Vi= 115Vac Vi= 230Vac	25A 50A
<b>Rated input current (115/230)</b>	7 / 3.5A	<b>P.F.C. Vi= 230Vac, Ionom.</b>	0.99

## Controls and Protections

<b>Input Fuse</b>	T10A/250Vac internal*	<b>Power ready output (only SPD 24)</b>	17.6 - 19.4 VDC
<b>Overvoltage Protection SPD24</b> <b>SPD48</b>	30 - 33VDC 57 - 63VDC	Threshold voltages Contact rating at 60Vdc insulation	0.3A 500Vdc
<b>Output Short Circuit</b>	Current limit		
<b>Rated Overload Protection</b>	120-140%		

\* Not replaceable by user.


## General data (@ nominal line, full load, 25°C )

<b>Ambient temperature</b>	-25°C to 71°C	<b>Cooling</b>	Free air convection
<b>Derating (&gt;56°C to +71°C)</b>	2.5% /°C	<b>MTBF (MIL-HDBK-217F)</b>	n.a.
<b>Ambient humidity</b>	20 - 95%RH	<b>Case material</b>	Metal (powder painted aluminium)
<b>Storage</b>	-25°C to +85°C	<b>Weight</b>	1920g
<b>Dimensions L x W x D</b> Screw terminal type Plug in connectors	125 x 175 x 123 142 x 175 x 123	<b>Protection degree</b>	IP20

## Approvals and EMC

<b>Insulation voltage I/O</b>	3.000Vac	<b>CE</b>	EN61000-6-3 EN55022 class B EN61000-3-2 EN61000-3-3 EN61000-6-2 EN55024
<b>Insulation resistance I/O @ 500VDC</b>	100Mohm		
<b>UL / cUL</b>	UL508 listed, UL60950-1, Recognised		
<b>TUV</b>	EN60950-1		

## Block diagrams

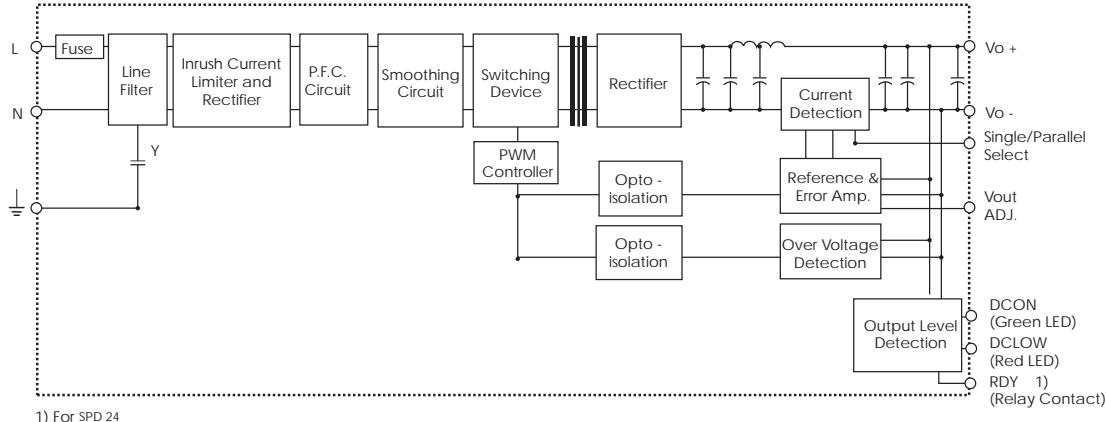

1) For SPD 24

## Pin assignment and front controls

Pin No.	Designation	Description
1	RDY (only SPD 24)	DC OK, relay normally open contact
2	RDY (only SPD 24)	DC OK, relay normally open contact
3	+	Positive output terminal
4	+	Positive output terminal
5	-	Negative output terminal
6	-	Negative output terminal
7	GND	Ground terminal to minimise High frequency emissions
8	L	Phase input ( no polarity with DC input )
9	N	Neutral input ( no polarity with DC input )
	DC ON	DC output ready LED
	DC LO	DC low indicator LED
	Vout ADJ.	Trimmer for fine output voltage adjustment
	S/P	Single parallel selection switch

## Installation

### VENTILATION / COOLING:

- Normal air convection
- 25mm of free space along all sides to allow good cooling


### SCREW CONNECTIONS:

- 10-24AWG Flexible or solid cable. 8mm stripping recommended


### PLUG IN CONNECTORS:

- 10-24AWG Flexible or solid cable. 7mm stripping recommended

## Derating Diagram

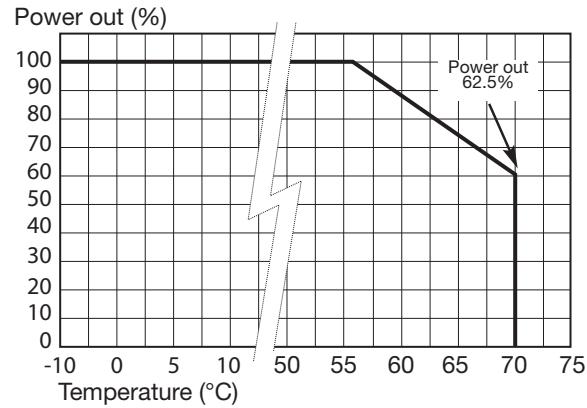

## Mechanical Drawings

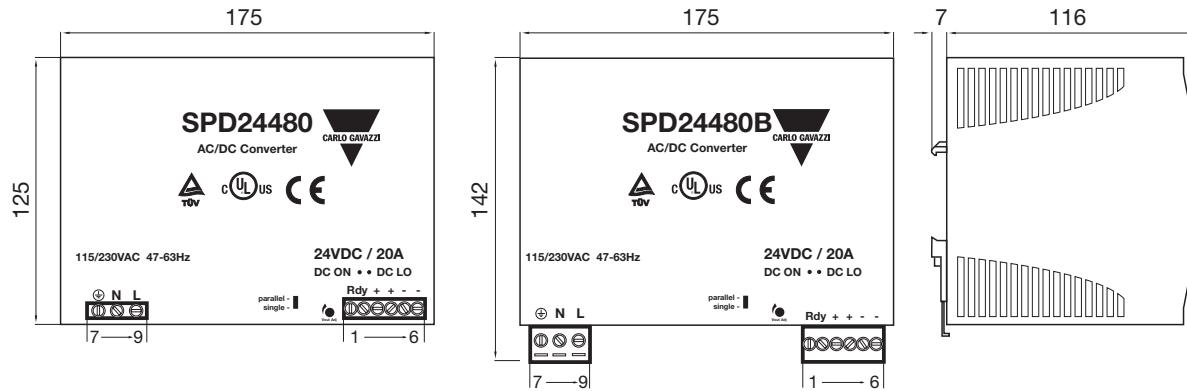



## SPD Switching Power Supplies

CARLO GAVAZZI presents a new range of power supplies especially designed for the automation market. The wide range of supply voltages and DC output voltages/power provide a multitude of choices for all low power electrical or electronic devices commonly used in automatic machinery. Components such as sensors, electromechanical relays, contactors, solid state relays, timers, temperature controllers, PLCs, process controllers, DC motors, solenoids, displays, etc. now have a reliable power source.



### High Efficiency

The power supply's average efficiency and ripple voltage ratings are comparable or better than most power supplies on the market.

### Product Range

	5V	12V	15V	24V	48V
SPD 5-10-18W	■	■	■	■	
SPD 30-60W	■	■	■	■	
SPD 120W		■	■	■	
SPD 240-480W		■	■	■	

### Adjustable Output

All models provide a front potentiometer in order to adjust the output voltage. This useful feature can provide a voltage surplus when line voltage losses cause low voltages to the load.

### Parallel Connection

Parallel connection is a standard feature with the 240W and 480W versions, and optional on the 120W version.

### Visual and Electrical Indications

Models up to 18W are equipped with two front LEDs, which provide a visual indication of the 'Power Out' enabled and 'Low Voltage' on the output. All other sizes are equipped with an LED indication and also with an output 'Power Ready' signal. This signal could be used by other electronic devices or to power an alarm (this feature is only available on 24VDC output versions).



Space Optimization



Diagnostic Warning



User Friendly



Minimizing Energy Cost



Long Term Reliability



Long Term Reliability

Specifications are subject to change without notice.





### PARALLEL or SINGLE FUNCTION SWITCH

On the 240W and 480W versions the parallel/single function switch is a standard feature, on the 120W version it is available as an option. By setting this switch on the 'Parallel' position it is possible to connect up to three power supplies in parallel, in order to increase output power.

Also on the 'Parallel' position, voltage output is fixed and not adjustable in order to prevent unbalanced output voltages. Output '+' and '-' terminals are doubled, on models from 120W, in order to easily facilitate parallel connection.



### Ventilation Grid

### Model Number

### Input Terminals

Also available with removable terminals PFC function: built in.

### Safety Label

Approval data file numbers EAN cod and traceability data.

### DIN Rail Clip

Easy installation on any kind of DIN Rail.

### 'ON' LED

Indicates power output is OK.

### 'LO' LED

Indicates output voltage too low.

### Vout Adjustment

Allows voltage output voltage adjustment within a small range to the required value.

### Output Terminals

Also available with removable terminals

### Output Ready Terminals

Useful feature providing an electrical indication of good operation.



## SPD 480W

- 480W switching power supply
- Metal housing
- Screw terminals or detachable connectors
- Input voltage: 90-264VAC or 120-370VDC (115/230 autoselected)
- Output voltage adjustment
- PFC function standard
- Parallel function standard (selectable by front switch)
- Short circuit, overload and overvoltage protection
- Relay output for power 'Ready' signal (voltage free terminals)
- Operating temperature without derating: -10° to +60°C

# Switching Power Supplies



Part Number	Description	Vin *VAC	Vout VDC	Iout A
<b>SPD 05 05 1</b>	Switching Power Supply 5W, DIN Rail	100 - 240	5	1
<b>SPD 05 05 1B</b>	Switching Power Supply 5W, DIN Rail Spring terminals	100 - 240	5	1
<b>SPD 12 05 1</b>	Switching Power Supply 5W, DIN Rail	100 - 240	12	0.42
<b>SPD 12 05 1B</b>	Switching Power Supply 5W, DIN Rail, Spring terminals	100 - 240	12	0.42
<b>SPD 15 05 1</b>	Switching Power Supply 5W, DIN Rail	100 - 240	15	0.34
<b>SPD 15 05 1B</b>	Switching Power Supply 5W, DIN Rail, Spring terminals	100 - 240	15	0.34
<b>SPD 24 05 1</b>	Switching Power Supply 5W, DIN Rail	100 - 240	24	0.21
<b>SPD 24 05 1B</b>	Switching Power Supply 5W, DIN Rail, Spring terminals	100 - 240	24	0.21
<b>SPD 05 10 1</b>	Switching Power Supply 10W, DIN Rail	100 - 240	5	2
<b>SPD 05 10 1B</b>	Switching Power Supply 10W, DIN Rail, Spring terminals	100 - 240	5	2
<b>SPD 12 10 1</b>	Switching Power Supply 10W, DIN Rail	100 - 240	12	0.84
<b>SPD 12 10 1B</b>	Switching Power Supply 10W, DIN Rail, Spring terminals	100 - 240	12	0.84
<b>SPD 15 10 1</b>	Switching Power Supply 10W, DIN Rail	100 - 240	15	0.67
<b>SPD 15 10 1B</b>	Switching Power Supply 10W, DIN Rail, Spring terminals	100 - 240	15	0.67
<b>SPD 24 10 1</b>	Switching Power Supply 10W, DIN Rail	100 - 240	24	0.42
<b>SPD 24 10 1B</b>	Switching Power Supply 10W, DIN Rail, Spring terminals	100 - 240	24	0.42
<b>SPD 05 18 1</b>	Switching Power Supply 15W, DIN Rail	100 - 240	5	3
<b>SPD 05 18 1B</b>	Switching Power Supply 15W, DIN Rail, Spring terminals	100 - 240	5	3
<b>SPD 12 18 1</b>	Switching Power Supply 18W, DIN Rail	100 - 240	12	1.5
<b>SPD 12 18 1B</b>	Switching Power Supply 18W, DIN Rail, Spring terminals	100 - 240	12	1.5
<b>SPD 15 18 1</b>	Switching Power Supply 18W, DIN Rail	100 - 240	15	1.2
<b>SPD 15 18 1B</b>	Switching Power Supply 18W, DIN Rail, Spring terminals	100 - 240	15	1.2
<b>SPD 24 18 1</b>	Switching Power Supply 18W, DIN Rail	100 - 240	24	0.75
<b>SPD 24 18 1B</b>	Switching Power Supply 18W, DIN Rail, Spring terminals	100 - 240	24	0.75
<b>SPD 05 30 1</b>	Switching Power Supply 30W, DIN Rail	100 - 240	5	6
<b>SPD 05 30 1B</b>	Switching Power Supply 30W, DIN Rail, Spring terminals	100 - 240	5	6
<b>SPD 12 30 1</b>	Switching Power Supply 30W, DIN Rail	100 - 240	12	2.5
<b>SPD 12 30 1B</b>	Switching Power Supply 30W, DIN Rail, Spring terminals	100 - 240	12	2.5
<b>SPD 24 30 1</b>	Switching Power Supply 30W, DIN Rail	100 - 240	24	1.25
<b>SPD 24 30 1B</b>	Switching Power Supply 30W, DIN Rail, Spring terminals	100 - 240	24	1.25
<b>SPD 48 30 1</b>	Switching Power Supply 30W, DIN Rail	100 - 240	48	0.625
<b>SPD 48 30 1B</b>	Switching Power Supply 30W, DIN Rail, Spring terminals	100 - 240	48	0.625
<b>SPD 05 60 1</b>	Switching Power Supply 50W, DIN Rail	100 - 240	5	10
<b>SPD 05 60 1B</b>	Switching Power Supply 50W, DIN Rail, Spring terminals	100 - 240	5	10
<b>SPD 12 60 1</b>	Switching Power Supply 60W, DIN Rail	100 - 240	12	5
<b>SPD 12 60 1B</b>	Switching Power Supply 60W, DIN Rail, Spring terminals	100 - 240	12	5
<b>SPD 24 60 1</b>	Switching Power Supply 60W, DIN Rail	100 - 240	24	2.5
<b>SPD 24 60 1B</b>	Switching Power Supply 60W, DIN Rail, Spring terminals	100 - 240	24	2.5
<b>SPD 48 60 1</b>	Switching Power Supply 60W, DIN Rail	100 - 240	48	1.25
<b>SPD 48 60 1B</b>	Switching Power Supply 60W, DIN Rail, Spring terminals	100 - 240	48	1.25
<b>SPD 12 120 1</b>	Switching Power Supply 120W, DIN Rail	100 - 240	12	10
<b>SPD 12 120 1F</b>	Switching Power Supply 120W, DIN Rail, with PFC	100 - 240	12	10
<b>SPD 12 120 1P</b>	Switching Power Supply 120W, DIN Rail, with Parallel function	100 - 240	12	10
<b>SPD 12 120 1FP</b>	Switching Power Supply 120W, DIN Rail, with PFC and Parallel function	100 - 240	12	10

Part Number	Description	Vin *VAC	Vout VDC	Iout A
<b>SPD 12 120 1B</b>	Switching Power Supply 120W, DIN Rail, Removable connectors	100 - 240	12	10
<b>SPD 12 120 1BF</b>	Switching Power Supply 120W, DIN Rail, Removable connectors and PFC	100 - 240	12	10
<b>SPD 12 120 1BP</b>	Switching Power Supply 120W, DIN Rail, Removable connectors and Parallel function	100 - 240	12	10
<b>SPD 12 120 1BFP</b>	Switching Power Supply 120W, DIN Rail, Removable connectors, PFC and Parallel function	100 - 240	12	10
<b>SPD 24 120 1</b>	Switching Power Supply 120W, DIN Rail	100 - 240	24	5
<b>SPD 24 120 1F</b>	Switching Power Supply 120W, DIN Rail, with PFC	100 - 240	24	5
<b>SPD 24 120 1P</b>	Switching Power Supply 120W, DIN Rail, with Parallel function	100 - 240	24	5
<b>SPD 24 120 1FP</b>	Switching Power Supply 120W, DIN Rail, with PFC and Parallel function	100 - 240	24	5
<b>SPD 24 120 1B</b>	Switching Power Supply 120W, DIN Rail, Removable connectors	100 - 240	24	5
<b>SPD 24 120 1BP</b>	Switching Power Supply 120W, DIN Rail, Removable connectors and Parallel function	100 - 240	24	5
<b>SPD 24 120 1BFP</b>	Switching Power Supply 120W, DIN Rail, Removable connectors, PFC and Parallel function	100 - 240	24	5
<b>SPD 48 120 1</b>	Switching Power Supply 120W, DIN Rail	100 - 240	48	2.5
<b>SPD 48 120 1F</b>	Switching Power Supply 120W, DIN Rail, with PFC	100 - 240	48	2.5
<b>SPD 48 120 1P</b>	Switching Power Supply 120W, DIN Rail, with Parallel function	100 - 240	48	2.5
<b>SPD 48 120 1FP</b>	Switching Power Supply 120W, DIN Rail, with PFC and Parallel function	100 - 240	48	2.5
<b>SPD 48 120 1B</b>	Switching Power Supply 120W, DIN Rail, Removable connectors	100 - 240	48	2.5
<b>SPD 48 120 1BF</b>	Switching Power Supply 120W, DIN Rail, Removable connectors and PFC	100 - 240	48	2.5
<b>SPD 48 120 1BP</b>	Switching Power Supply 120W, DIN Rail, Removable connectors and Parallel function	100 - 240	48	2.5
<b>SPD 48 120 1BFP</b>	Switching Power Supply 120W, DIN Rail, Removable connectors, PFC and Parallel function	100 - 240	48	2.5
<b>SPD 24 240 1</b>	Switching Power Supply 240W, DIN Rail, PFC and Parallel function	100 - 240	24	10
<b>SPD 24 240 1B</b>	Switching Power Supply 240W, DIN Rail, Removable connectors, PFC and Parallel function	100 - 240	24	10
<b>SPD 48 240 1</b>	Switching Power Supply 240W, DIN Rail, PFC and Parallel function	100 - 240	48	5
<b>SPD 48 240 1B</b>	Switching Power Supply 240W, DIN Rail, Removable connectors, PFC and Parallel function	100 - 240	48	5
<b>SPD 24 480 1</b>	Switching Power Supply 480W, DIN Rail, PFC and Parallel function	100 - 240	24	20
<b>SPD 24 480 1B</b>	Switching Power Supply 480W, DIN Rail, Removable connector, PFC and Parallel function	100 - 240	24	20
<b>SPD 48 480 1</b>	Switching Power Supply 480W, DIN Rail, PFC and Parallel function	100 - 240	48	10
<b>SPD 48 480 1B</b>	Switching Power Supply 480W, DIN Rail, Removable connector, PFC and Parallel function	100 - 240	48	10

\* Approximate AC supply voltage is 100-240VAC. However, they can also be powered by lower and higher AC voltages and also DC Voltages.  
See datasheet for more accurate specifications.