



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS		DATE	BY	APPD
H		F	LNK			
		B	ECR-11-004693	01APR2011	RC	AH



FIBER CONNECTIVITY	
ODC PLUG	LC CONN.
PIN 1	A
PIN 2	B

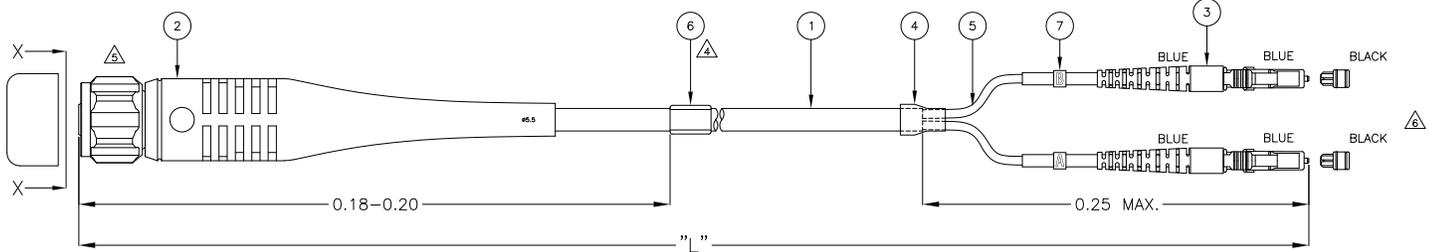

STANDARD LENGTHS ACCORDING TO CUSTOMER DRAWING 1920950	
PART NUMBER	"L" (meter) $\Delta$
X-2064140-Y	XY.0

**NOTES:**

- REFER TO TE CONNECTIVITY CUSTOMER DRAWING 2064160 FOR CABLE ASSEMBLY LOSS AND WAVELENGTHS THAT CABLE ASSEMBLY LOSS WILL BE TESTED TO
  - MINIMUM RETURN LOSS: 45 dB FOR BOTH ODC AND LC CONNECTORS  
RETURN LOSS WILL BE TESTED AT 1310 nm AND 1550 nm WAVELENGTHS
- $\Delta$  STANDARD LENGTHS AND LENGTH TOLERANCE ACC. TO TE CONNECTIVITY CUSTOMER DRAWING 1920950
- $\Delta$  INFORMATION ON LABEL SEE DETAIL:
- BARCODE
  - UNIQUE SERIAL NUMBER
  - ASSEMBLY LENGTH
  - TE CONNECTIVITY PART NUMBER
  - TE CONNECTIVITY ORDER NUMBER
- $\Delta$  ALLOWABLE TORQUE: 1 Nm TO 2 Nm WHEN TIGHTENING PLUG NUT
- $\Delta$  LENGTH DIFFERENCE BETWEEN LC CONNECTORS < 5 mm

Qty	Description	Item
2	LABEL "A" OR "B"	7
1	FOAC INFORMATION LABEL	6
2	FOAC ODC PROTECTIVE TUBING, BLACK	5
1	FOAC HEAT SHRINK TUBING, BLACK	4
2	LC CONNECTOR ASSEMBLY, SINGLE MODE, BLUE	3
1	FOKIT ODC PLUG ASSEMBLY, 2 FIBER, SINGLE MODE, VINYL CAP	2
L	FOCAB ODC 5.5 mm 2FOLD, SINGLE MODE 9/125, BLACK	1

ODC IS A TRADEMARK OF HUBER & SUHNER AG CORPORATION

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRW: R. COOLEN 07APR2009	
DIMENSIONS: METERS		CHK: A. HENGELMÖLEN 07APR2009	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPRO: A. HENGELMÖLEN 07APR2009	NAME: A. HENGELMÖLEN
0 PLC	±	APPLICATION SPEC:	SIZE: A2
1 PLC	±	WEIGHT:	CAGE CODE: 00779
2 PLC	±	FINISH:	DRAWING NO: C=2064140
3 PLC	±		RESTRICTED TO:
4 PLC	±		
ANGLES	±		
MATERIAL:		CUSTOMER DRAWING	
		SCALE: NTS	SHEET: 1 of 1