
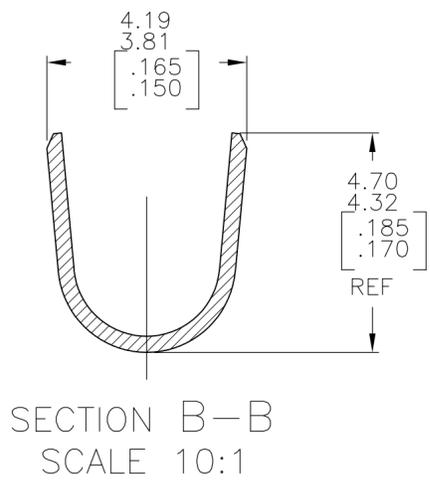
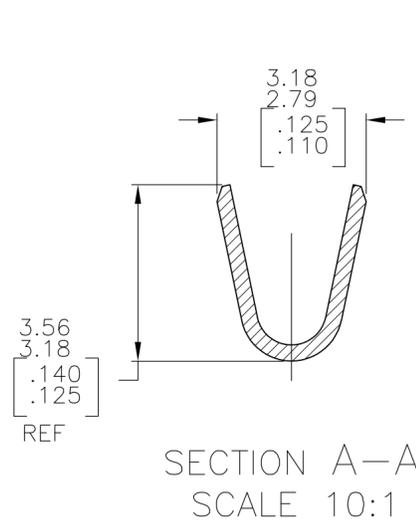
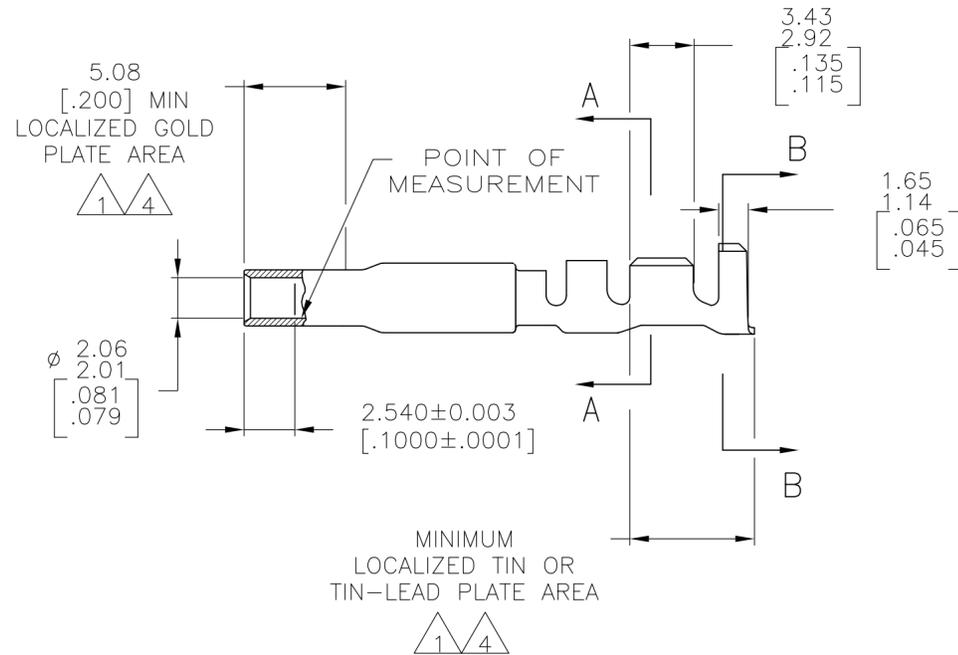


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.


| LOC | | DIST | | REVISIONS | | | |
|-----|-----|-------------|---------------------------|-----------|-----|------|--|
| P | LTR | DESCRIPTION | | DATE | DWN | APVD | |
| CM | 0 | C1 | REVISED PER ECO-11-004820 | 11MAR11 | RK | HMR | |

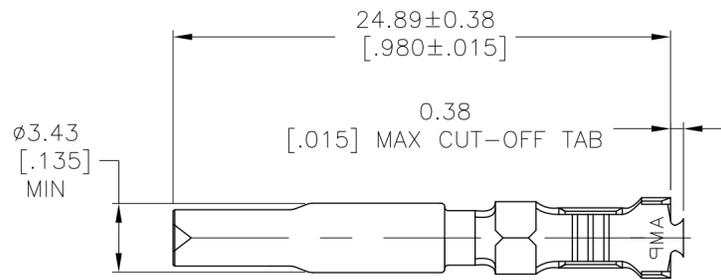

- 1. 0.00076[.000030] MIN GOLD AT POINT OF MEASUREMENT IN THE LOCALIZED GOLD PLATE AREA, 0.00127[.000050] MIN TIN-LEAD IN TIN-LEAD PLATE AREA, 0.00127[.000050] MIN NICKEL UNDERPLATE ON ENTIRE CONTACT.
- 2. WIRE RANGE: .5-2mm² [20-14 AWG]. INSULATION RANGE: 1.52-3.30[.060-.130] DIA.
- 3. DIMENSIONS IN BRACKETS ARE IN INCHES.
- 4. 0.00076[.000030] MIN GOLD AT POINT OF MEASUREMENT IN THE LOCALIZED GOLD PLATE AREA, 0.00127[.000050] MIN TIN IN TIN PLATE AREA, 0.00127[.000050] MIN NICKEL UNDERPLATE ON ENTIRE CONTACT.

| | | | |
|-----------------|-------------|--------|------------|
| GOLD Δ_4 | 0.30 [.012] | PH BRZ | 1-770251-0 |
| GOLD Δ_1 | 0.30 [.012] | PH BRZ | 770251-4 |
| PRE-TIN | 0.30 [.012] | PH BRZ | 770251-3 |
| FINISH | MATERIAL | | PART NO |

| | | | | |
|--|--|-----------------------------|---|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN K. SALMON 20JAN93 | STE TE Connectivity | |
| DIMENSIONS: mm [INCHES] | | CHK R. SWING 20JAN93 | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | APVD M. TRULL 01APR93 | NAME SOCKET, LOOSE PIECE, UNIVERSAL MATE-N-LOK(TM) II | |
| 0 PLC ± - | | PRODUCT SPEC | SIZE A2 | |
| 1 PLC ± - | | APPLICATION SPEC | CAGE CODE 00779 | |
| 2 PLC ± - | | WEIGHT | DRAWING NO C=770251 | |
| 3 PLC ± - | | FINISH | RESTRICTED TO | |
| 4 PLC ± - | | SEE TABLE | SCALE 4:1 | |
| ANGLES ± - | | CUSTOMER DRAWING | SHEET 1 of 1 | |
| MATERIAL SEE TABLE | | WEIGHT | REV C1 | |

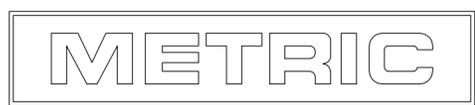

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-770251-0](#)