




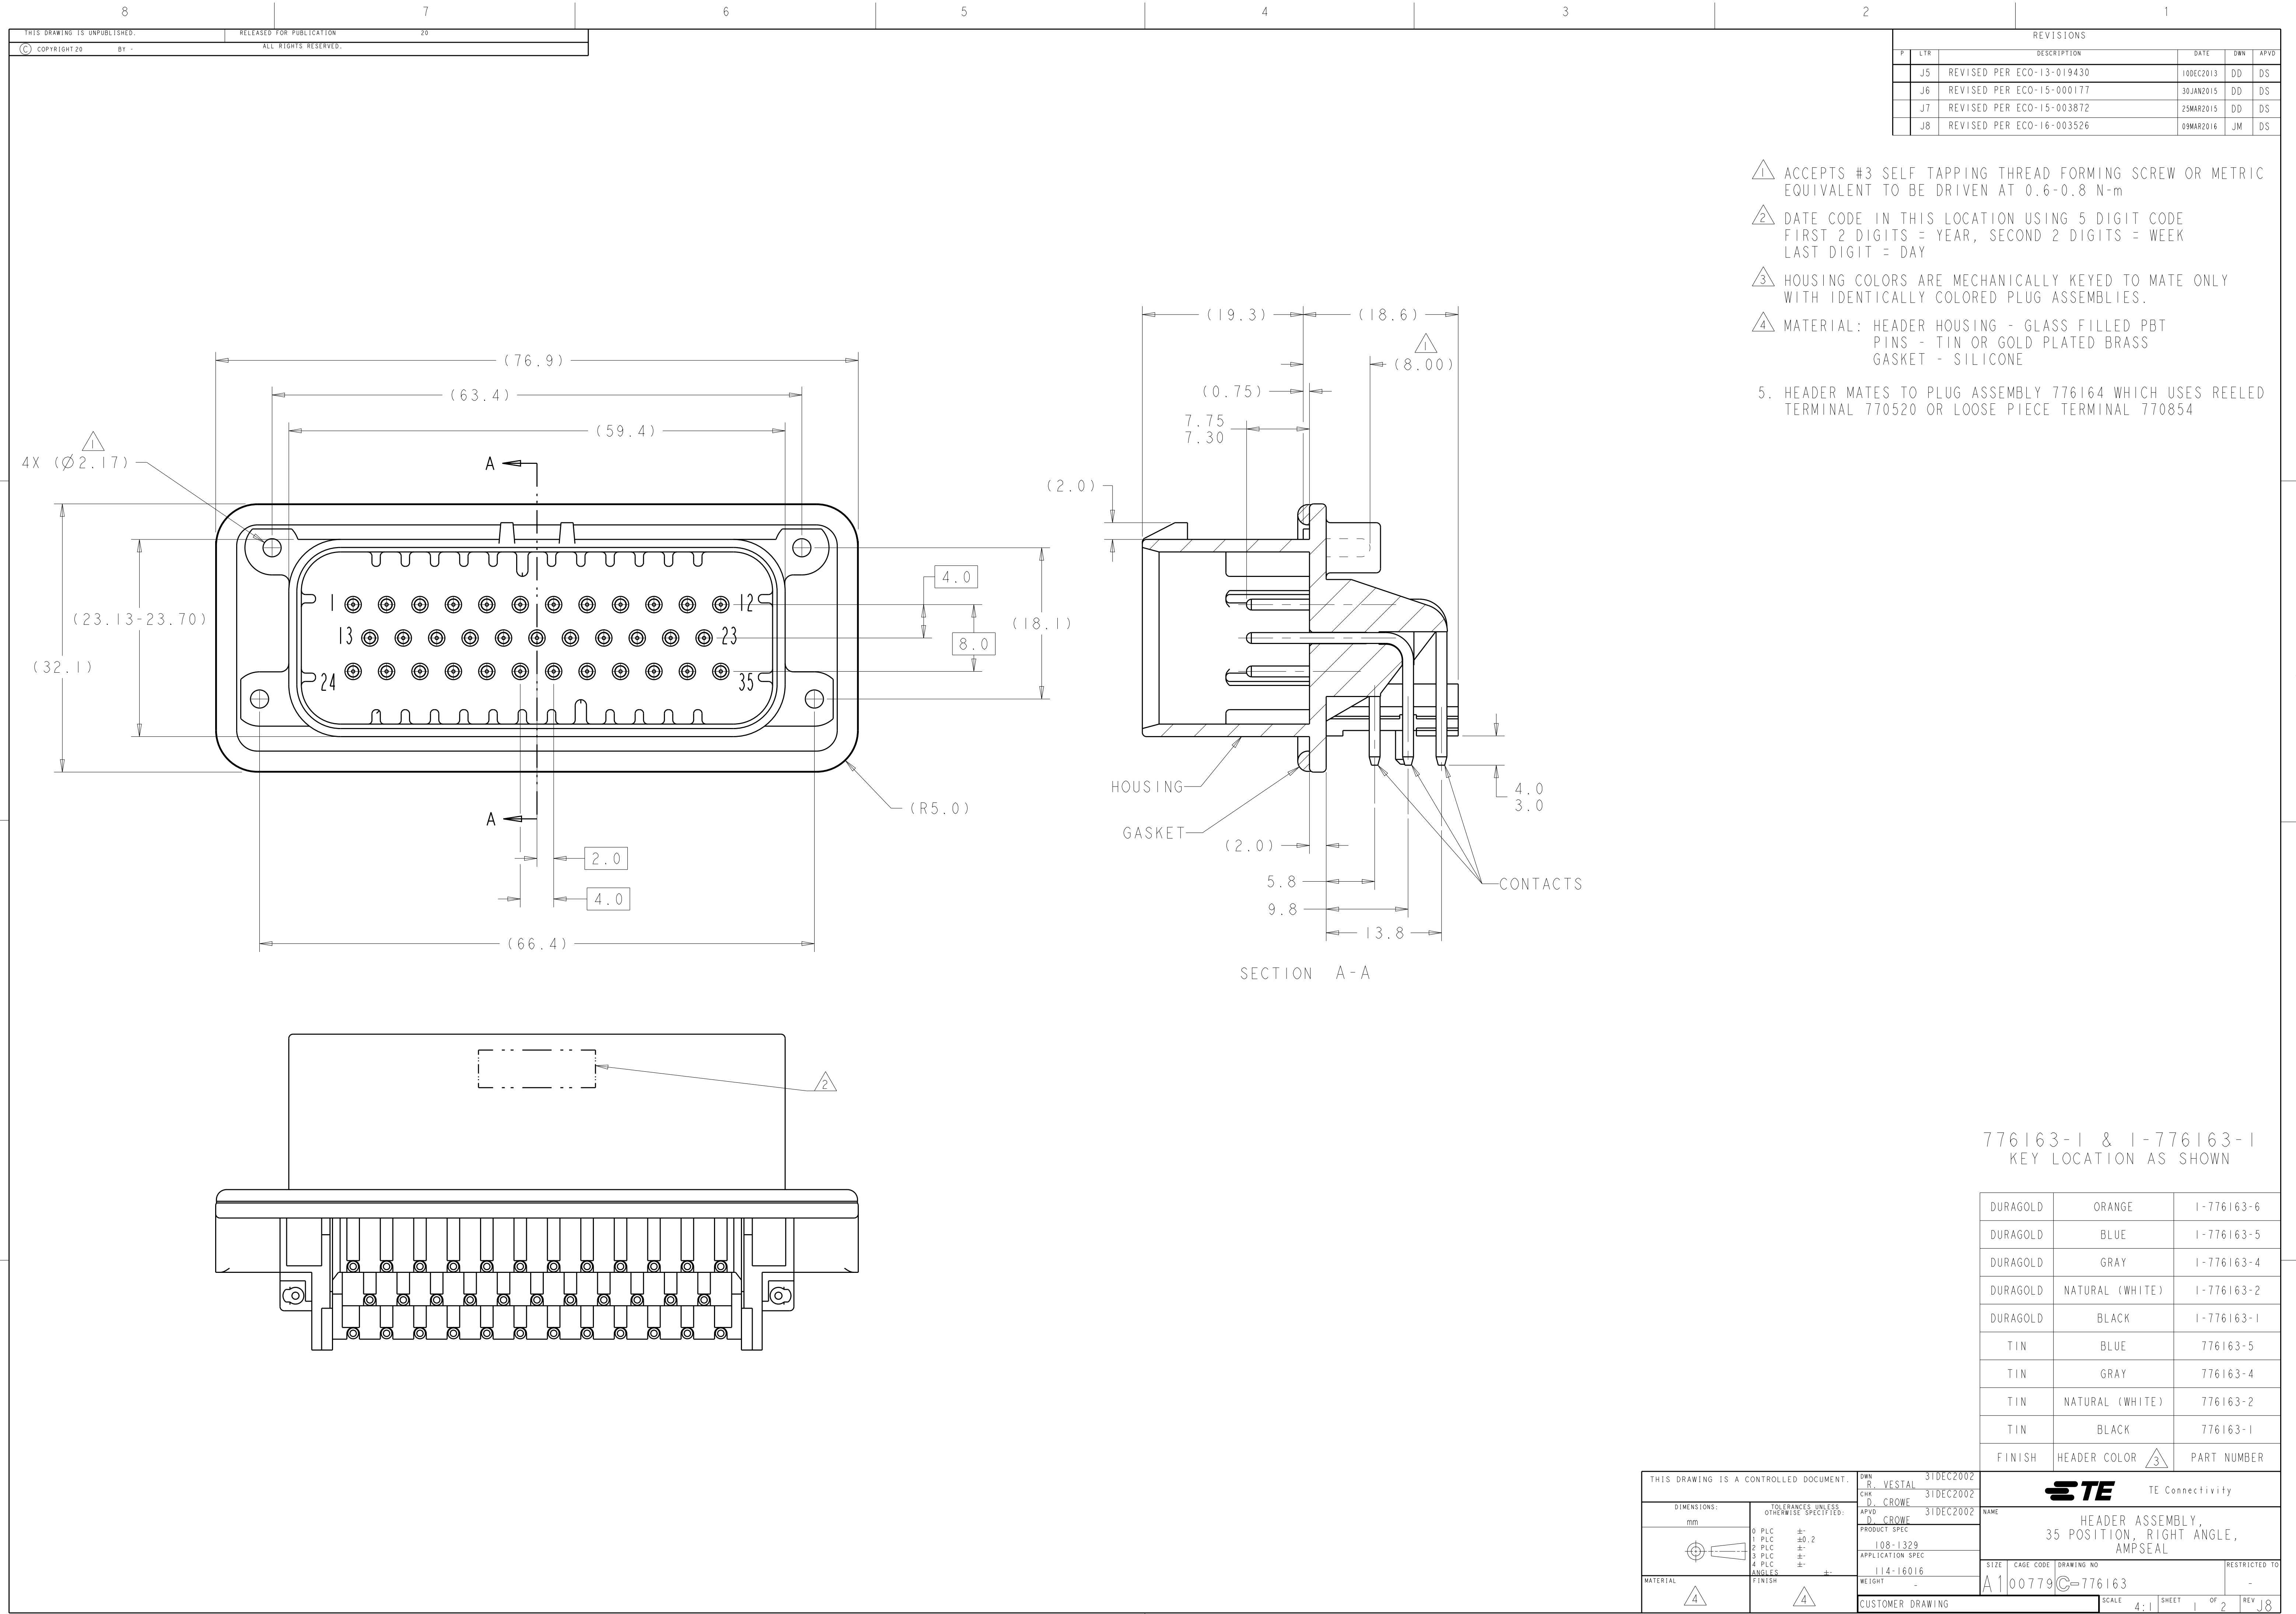


REVISIONS					
P.	LTR.	DESCRIPTION	DATE	DWN.	APVD.
-	-	SEE SHEET 1	-	-	-

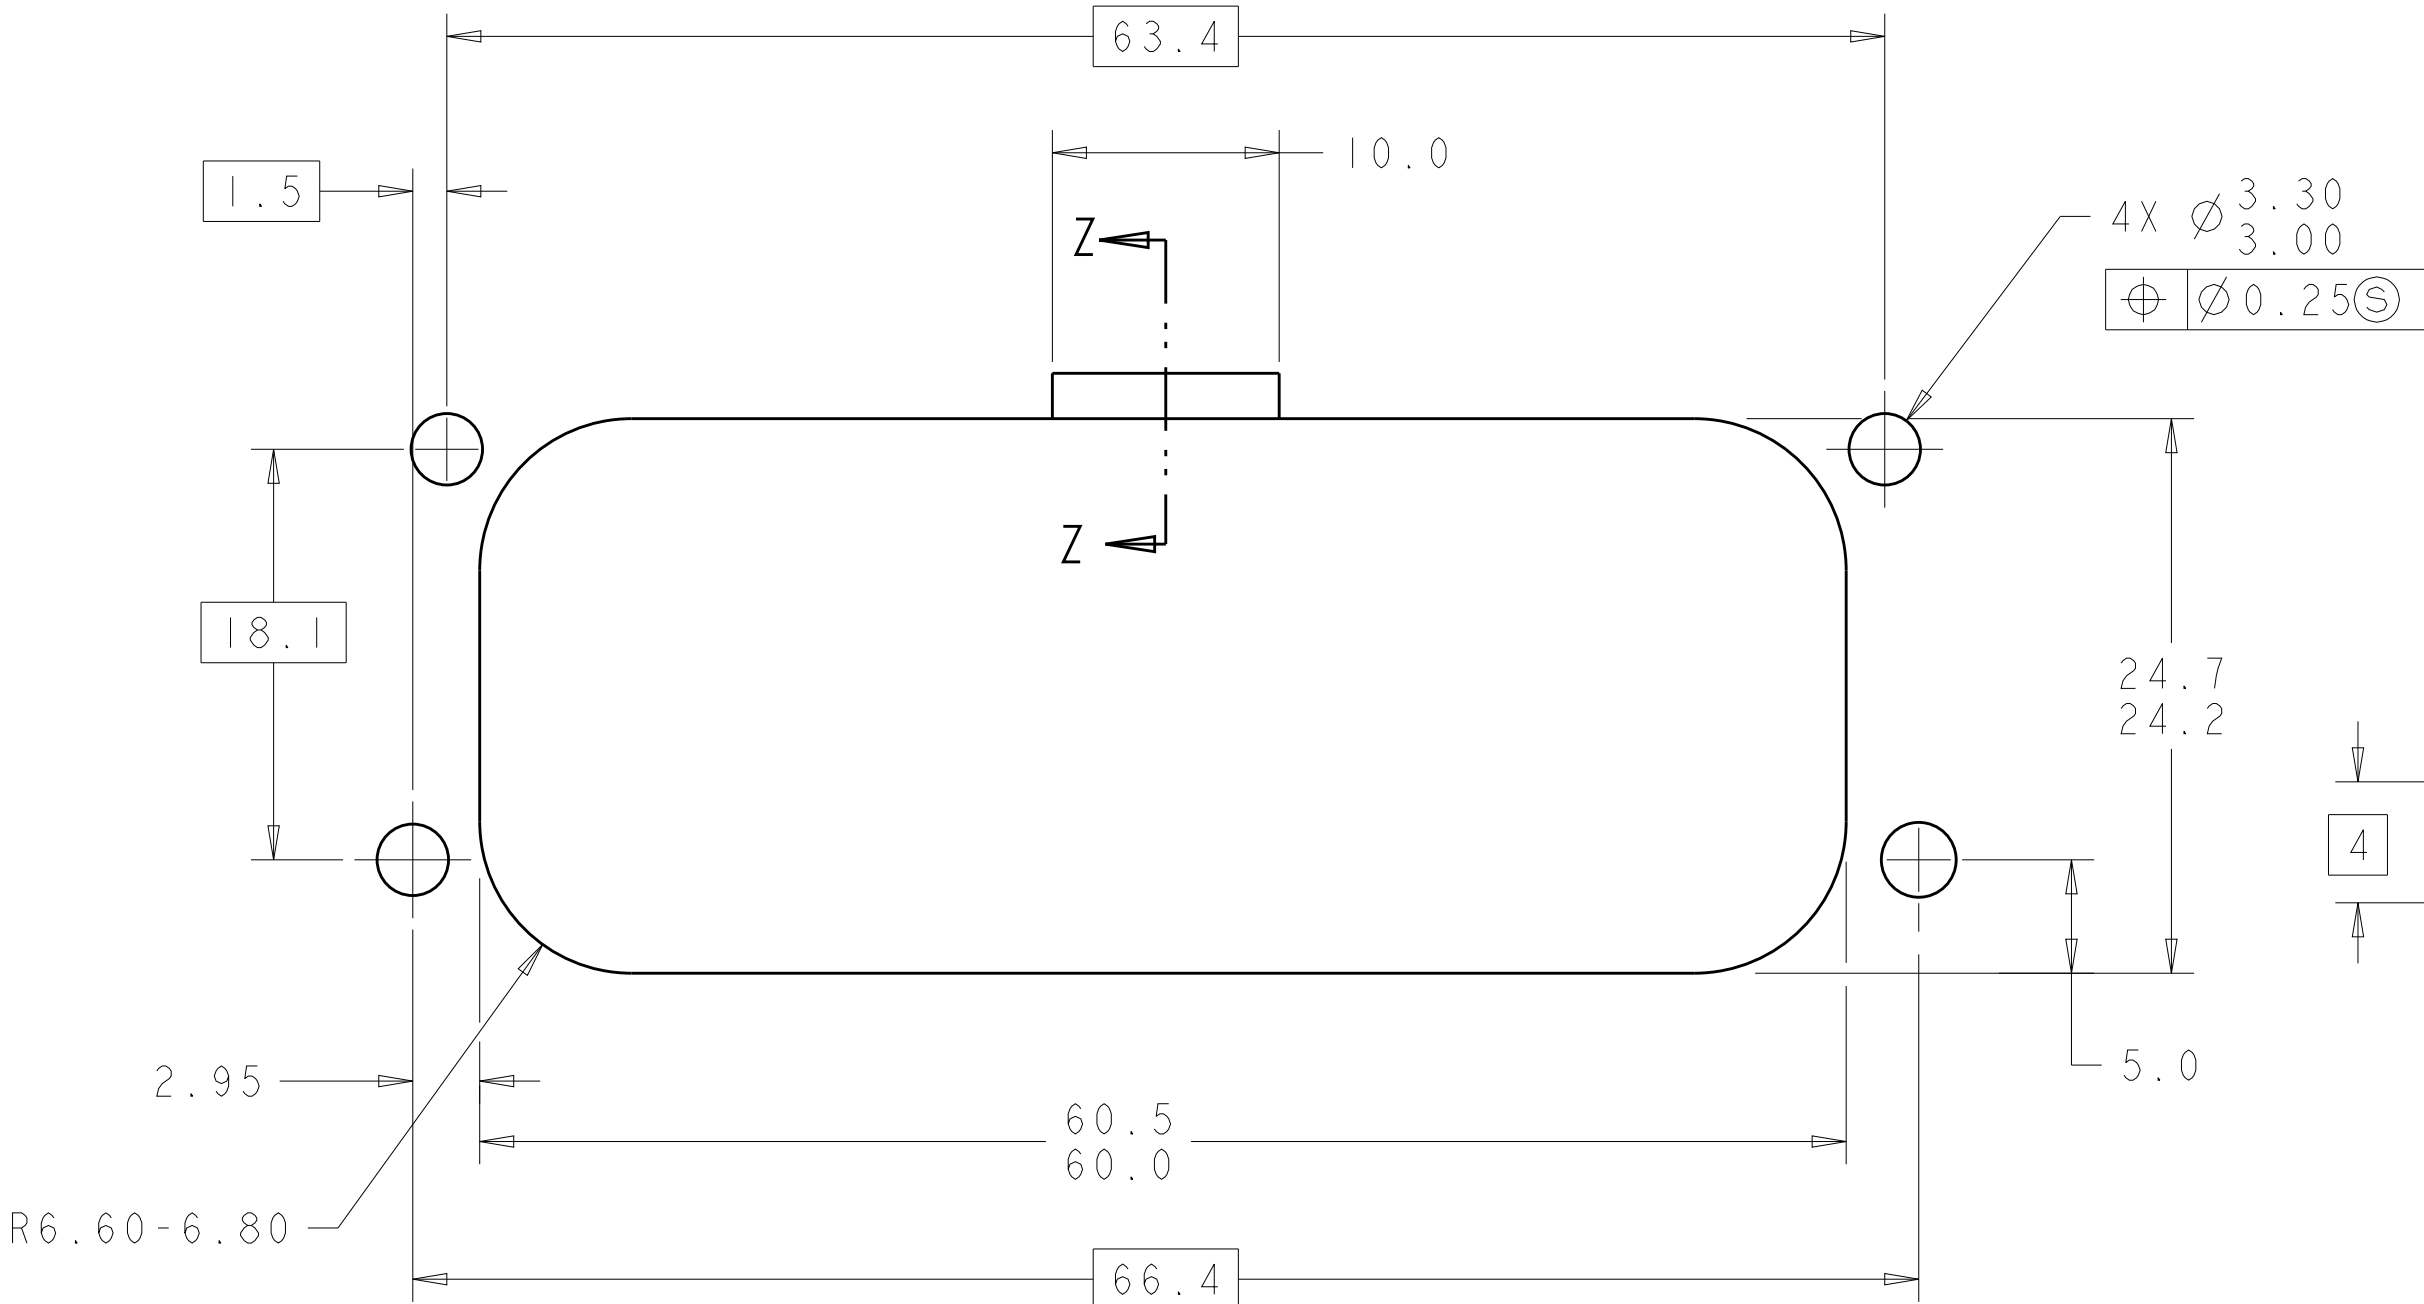


RECOMMENDED MOUNTING HOLE LAYOUT
FOR 5.0 MAX THICK PANEL

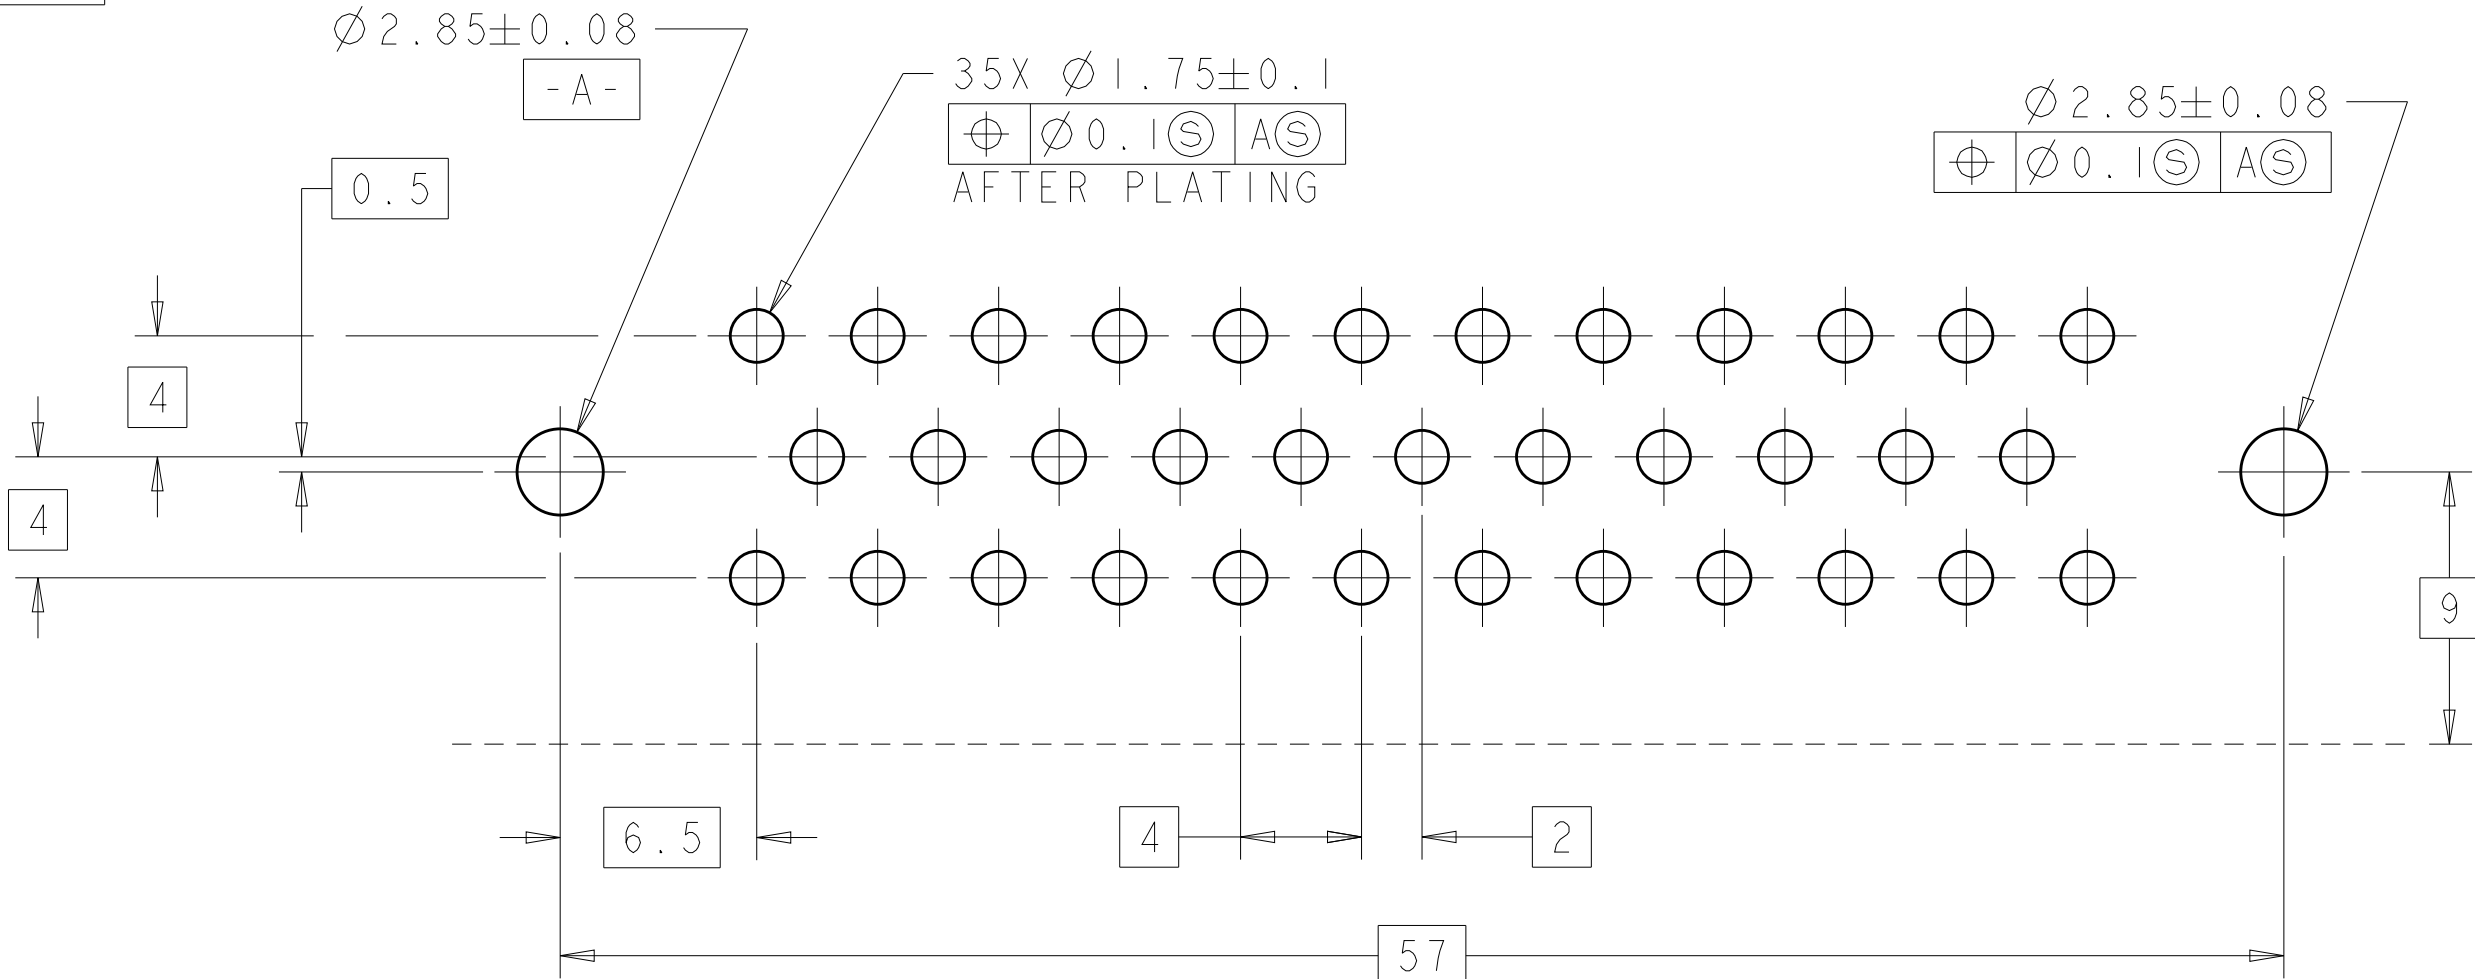


RECOMMENDED P.C. BOARD LAYOUT
FOR 1.57 THICK P.C. BOARD

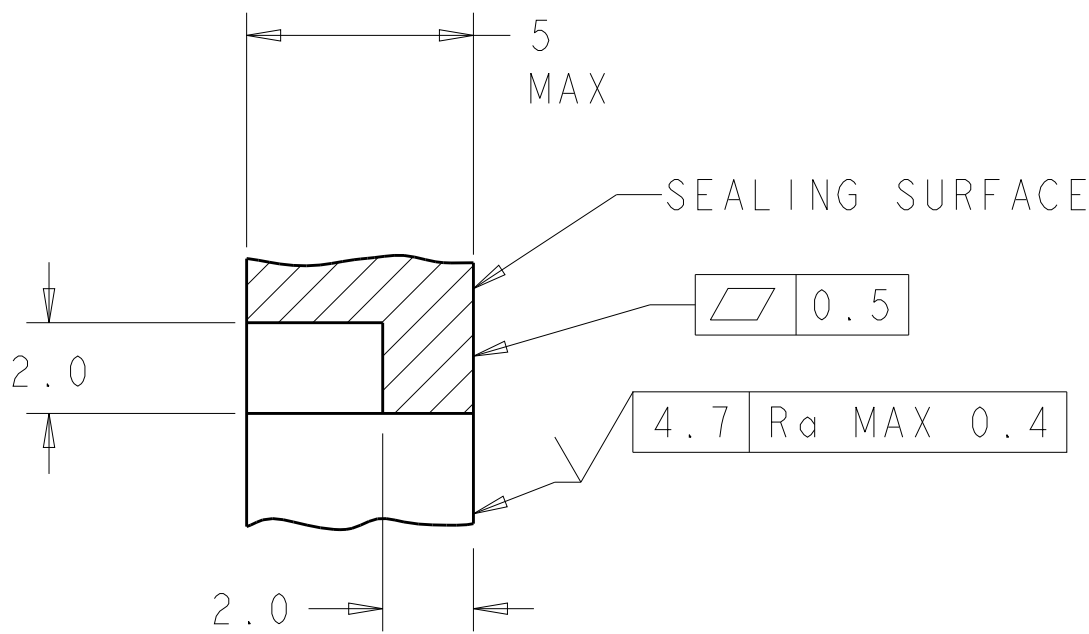


SECTION Z-Z
OPTIONAL CONSTRUCTION IF
THICKNESS IS GREATER THAN 2.0
SCALE 6:1

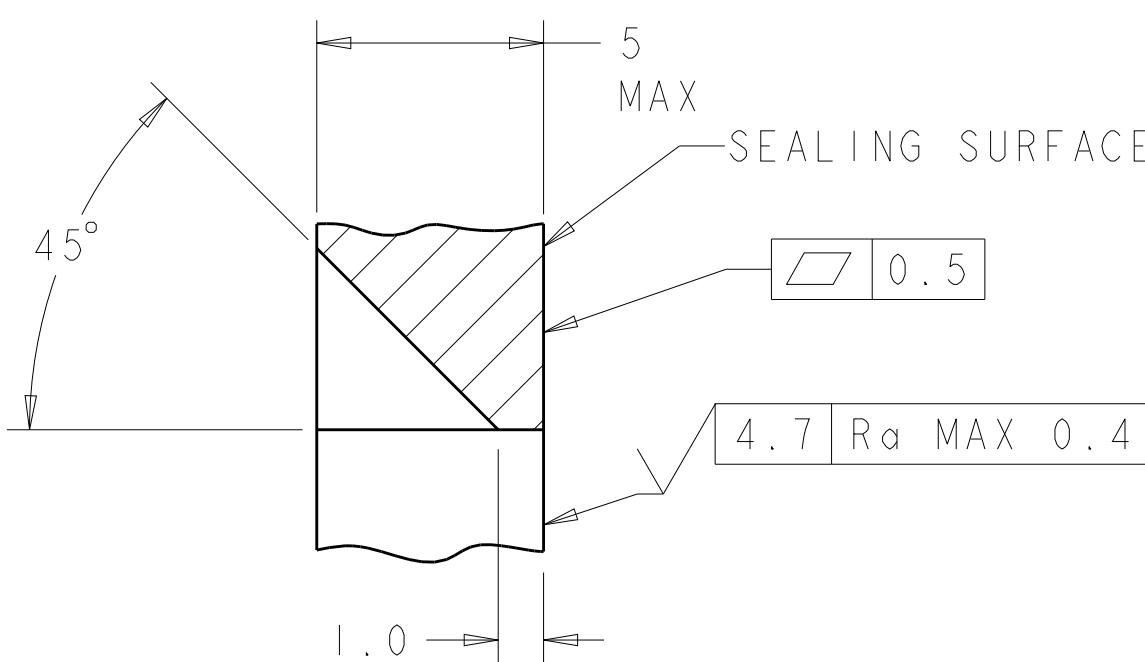


SECTION Z-Z
OPTIONAL CONSTRUCTION IF
THICKNESS IS GREATER THAN 2.0
SCALE 6:1

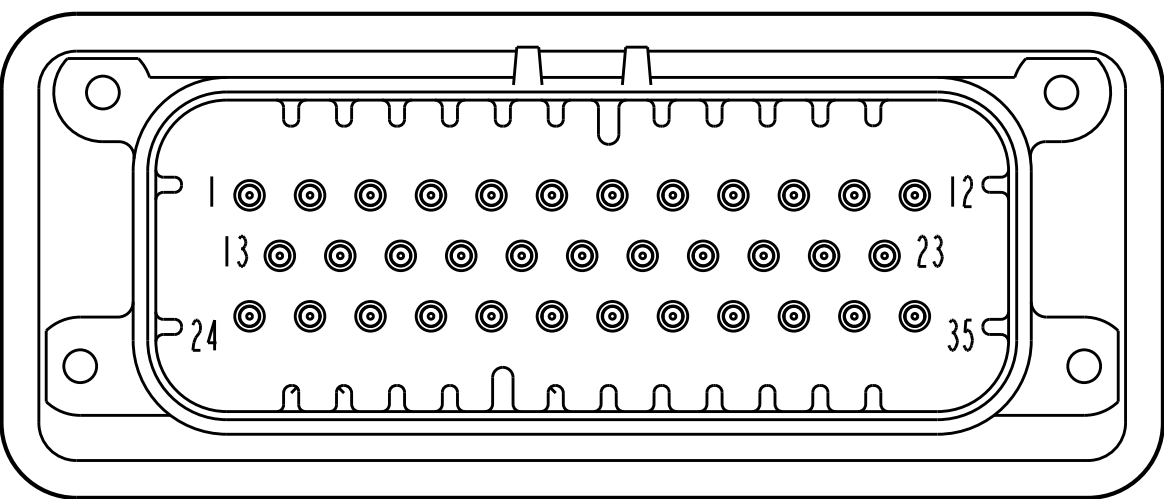


776163-2 & 1-776163-2
KEY LOCATION AS SHOWN
SCALE 2:1

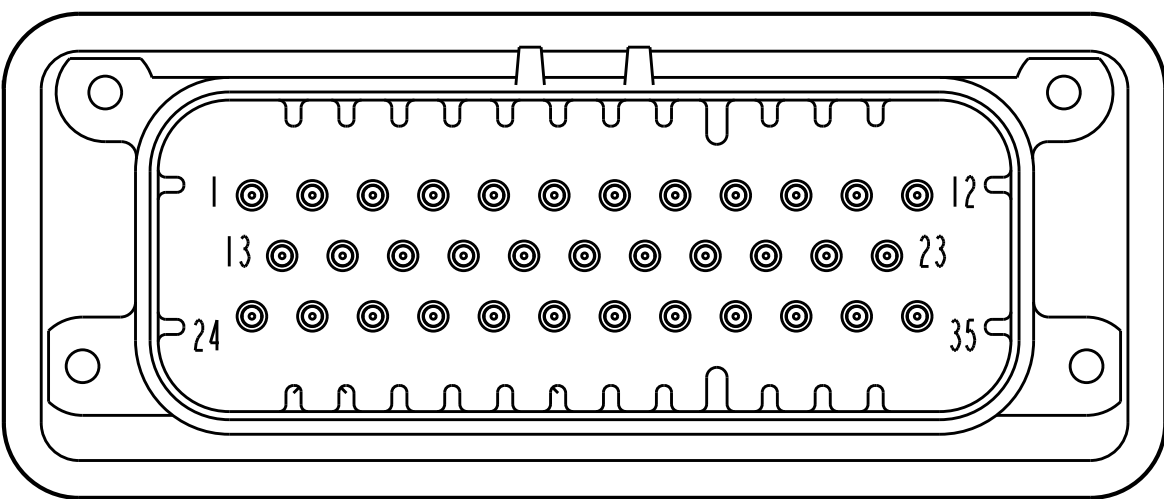



776163-4 & 1-776163-4
KEY LOCATION AS SHOWN
SCALE 2:1

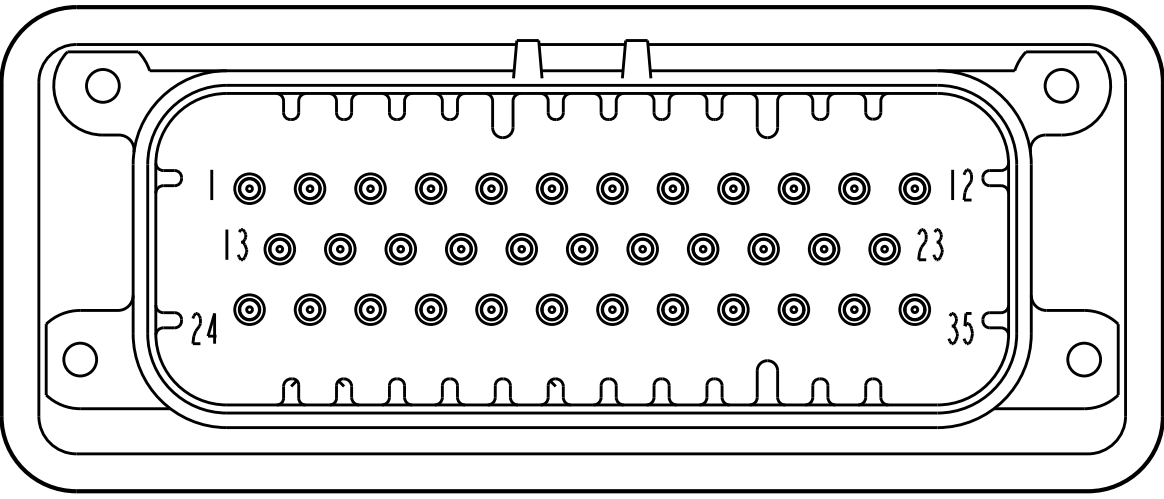


776163-5 & 1-776163-5
KEY LOCATION AS SHOWN
SCALE 2:1

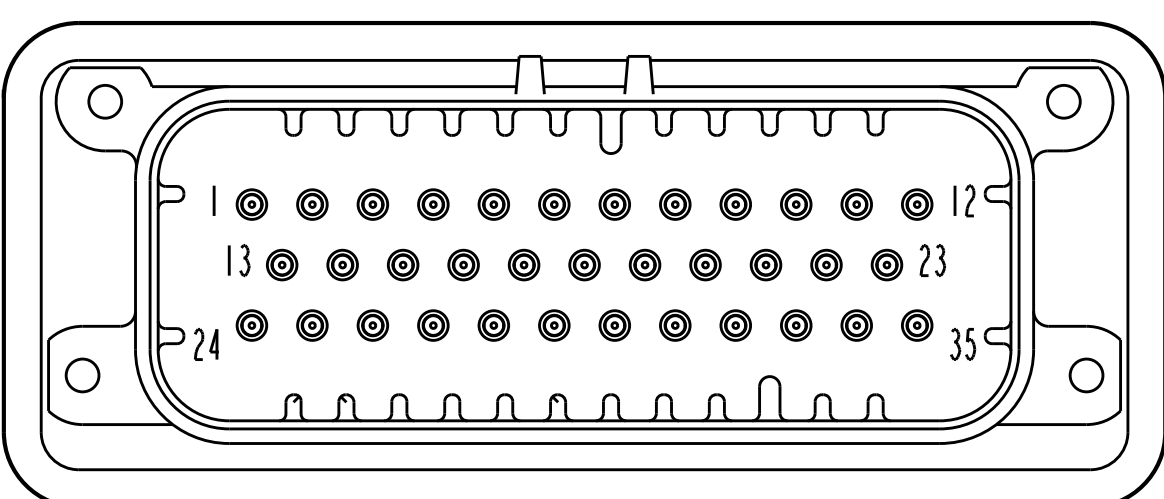

1-776163-6
KEY LOCATION AS SHOWN
SCALE 2:1

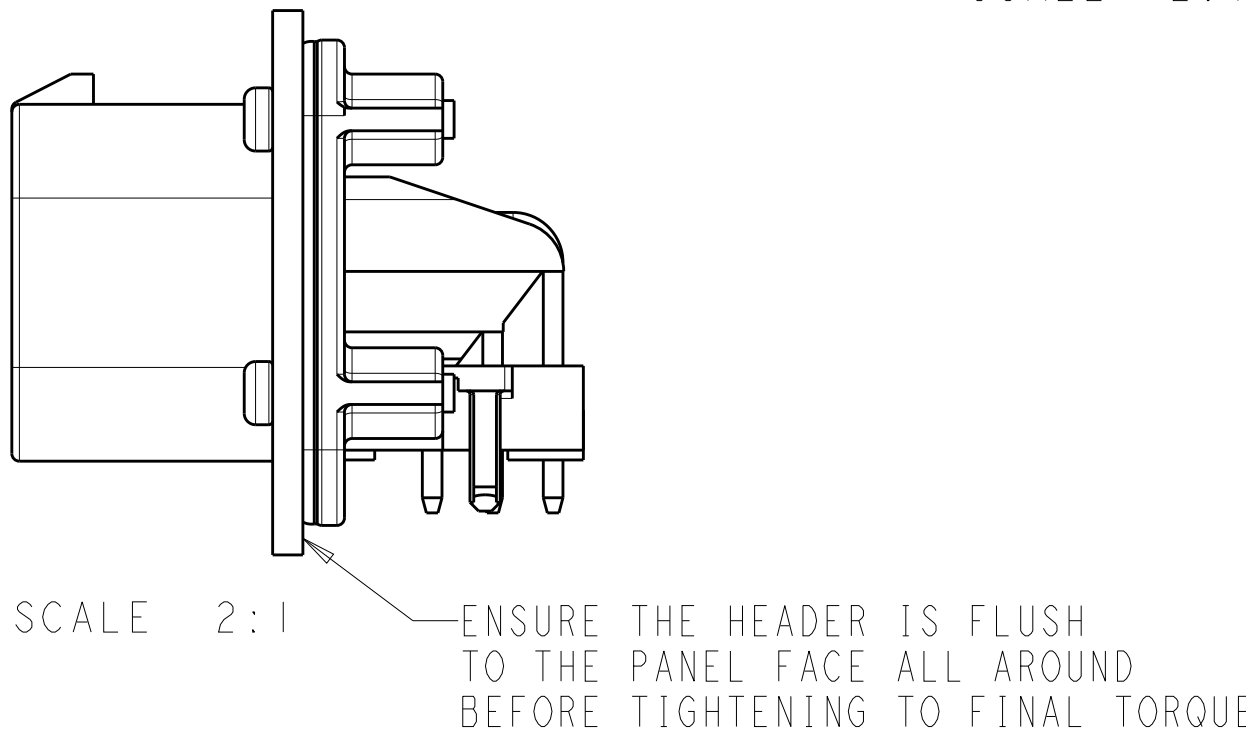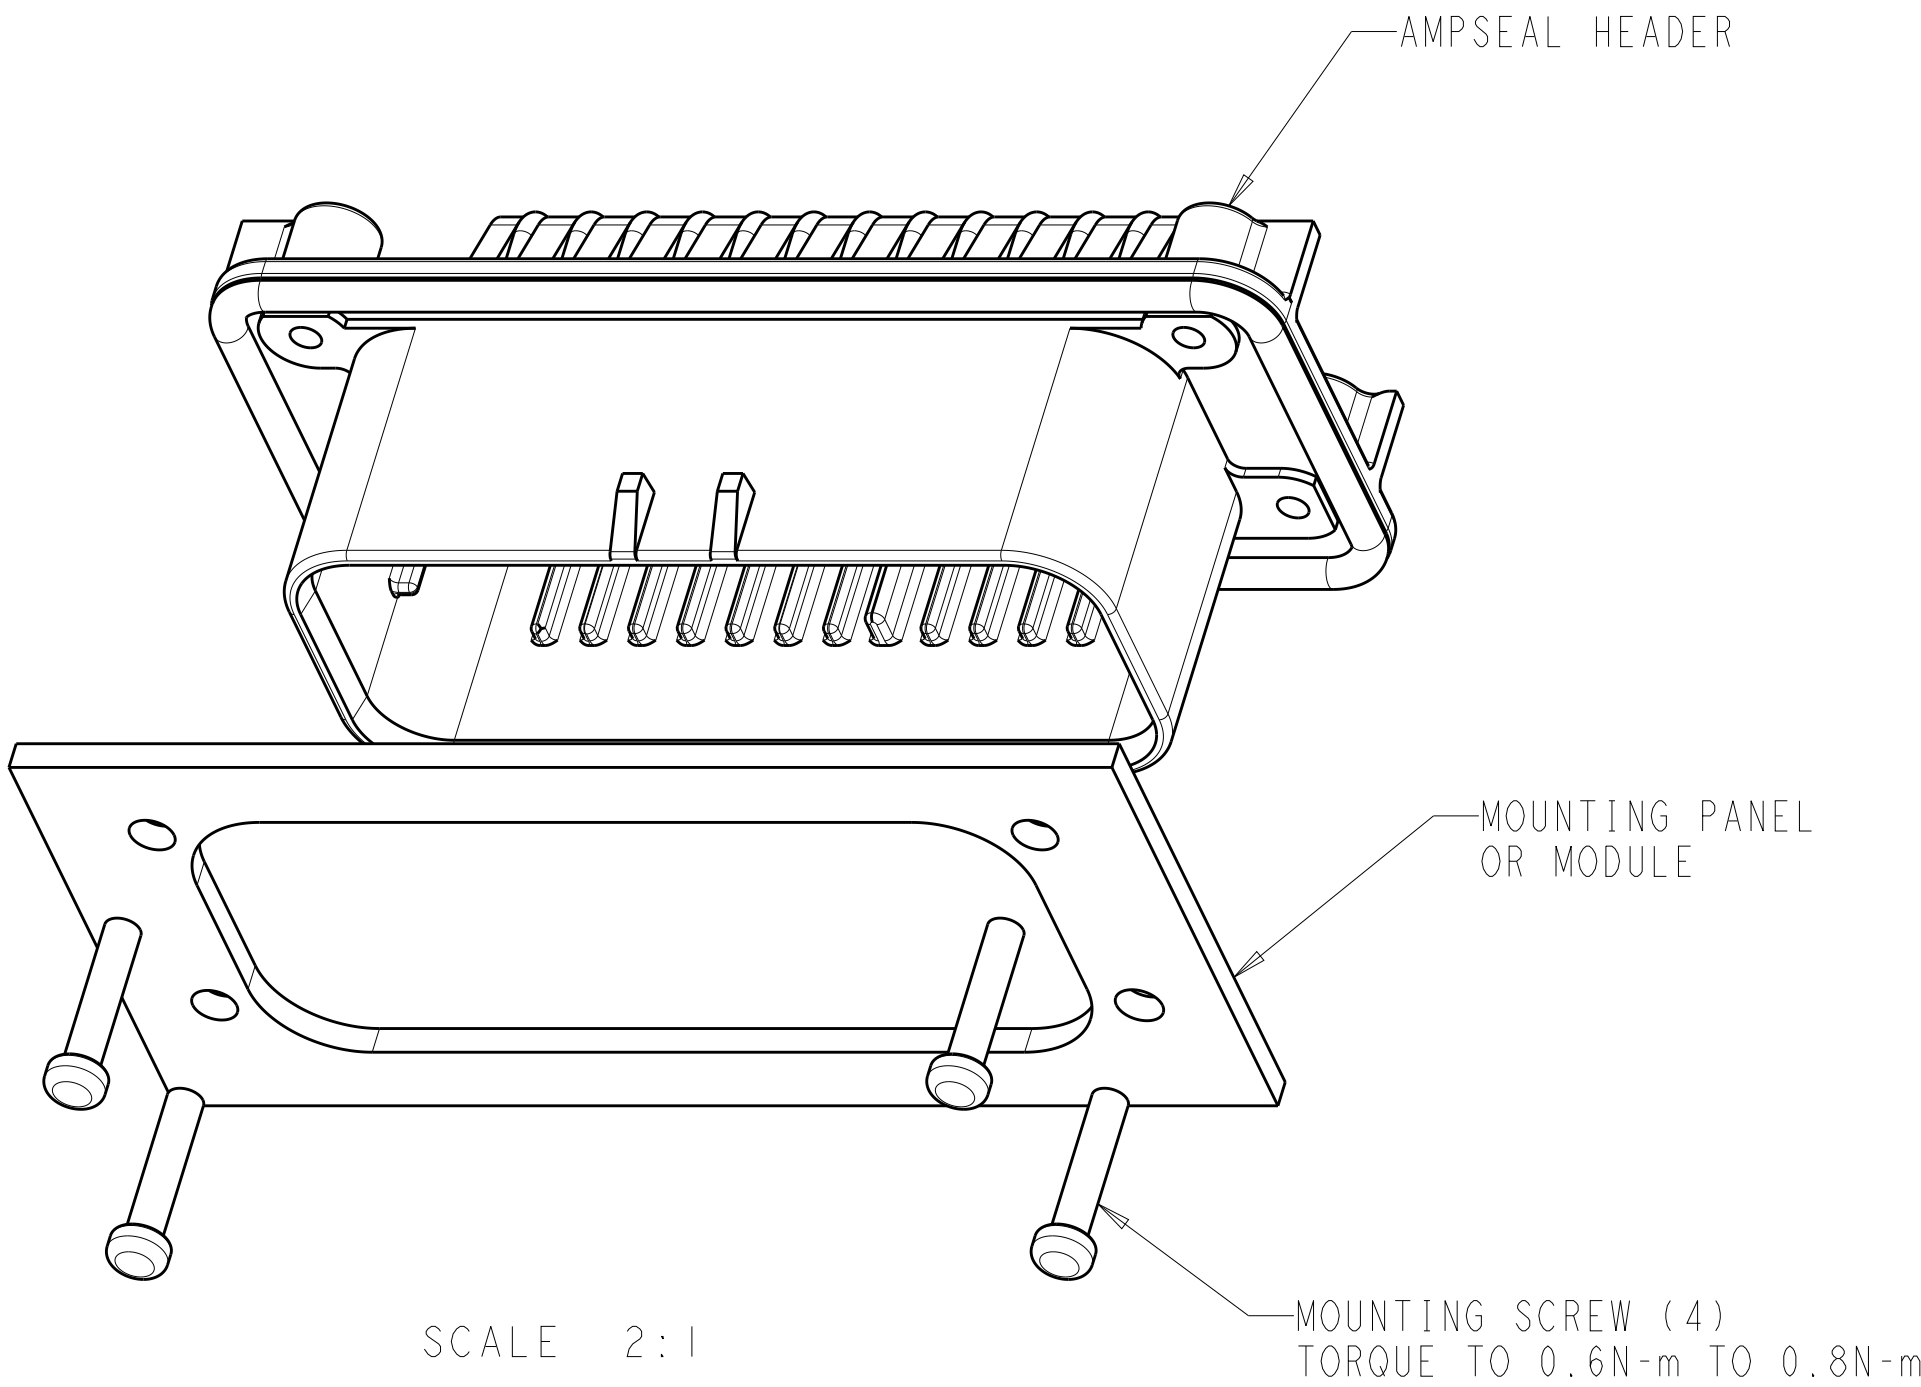

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. VESTAL 31DEC2002	 TE Connectivity	
DIMENSIONS:		CHK D. CROWE 31DEC2002		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD D. CROWE 31DEC2002	NAME	
	0 PLC ±0.2	PRODUCT SPEC	HEADER ASSEMBLY, 35 POSITION, RIGHT ANGLE, AMPSEAL	
	1 PLC ±0.2	108-1329		
	2 PLC ±0.2	APPLICATION SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO	
	3 PLC ±0.2	114-16016		
MATERIAL	FINISH	WEIGHT	A100779C=776163	
-	-	-	CUSTOMER DRAWING	
SCALE 4:1		SHEET 2 OF 2		REV J8

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-776163-4](#)