


- △ NYLON, UL94V-2, NATURAL.
- △ DIMENSION TO BE CHECKED AT SURFACE A.
- 3. DIMENSIONS IN BRACKETS ARE IN INCHES.
- 4. MALE CONTACTS MUST BE INSERTED SO THAT THE TOP OF THE WIRE AND INSULATION CRIMPS ARE FACING THE SIDE OF THE HOUSING WITH THE LOCKING LATCH.



B	NO. OF POSITIONS	PART NUMBER
51.6[2.032]	24	2-794542-4
47.4[1.866]	22	2-794542-2
43.2[1.701]	20	2-794542-0
39[1.535]	18	1-794542-8
34.8[1.370]	16	1-794542-6
30.6[1.205]	14	1-794542-4
26.4[1.039]	12	1-794542-2
22.2[0.874]	10	1-794542-0
18[0.709]	8	794542-8
13.8[0.543]	6	794542-6
9.6[0.378]	4	794542-4
5.4[0.213]	2	794542-2

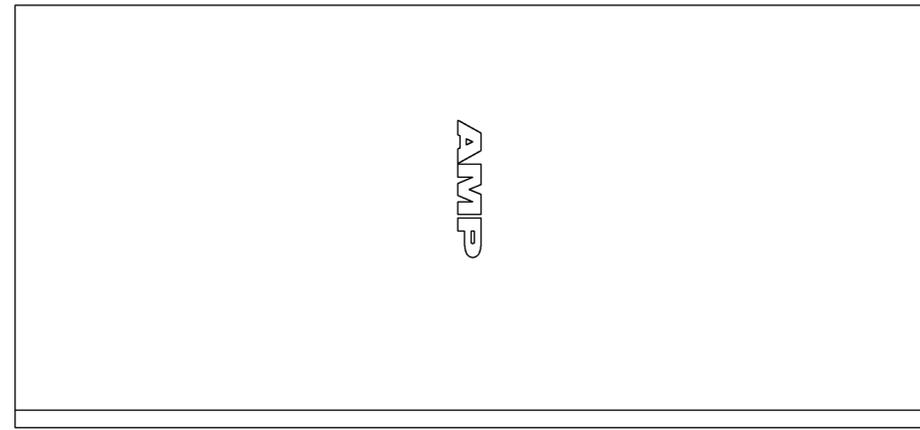

DIMENSIONS: mm [ INCHES ] TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ±0.21 (01) 2 PLC ± 3 PLC ± 4 PLC ± ANGLES 40° 30'		DWN R. VESTAL 16MAR99 CHK R. SWING 16MAR99 APVD C. CASH 16MAR99	NAME PRODUCT SPEC APPLICATION SPEC SIZE CAGE CODE DRAWING NO. WEIGHT CUSTOMER DRAWING	STC TE Connectivity PLUG, FREE HANGING, 2 TO 24 POSITION, AMP-DUACT™ POWER CONNECTOR A   00779 C=794542 SCALE 4:1 SHEET 1 OF 1 REV P
---	--	---	--	---

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-794542-0](#)