


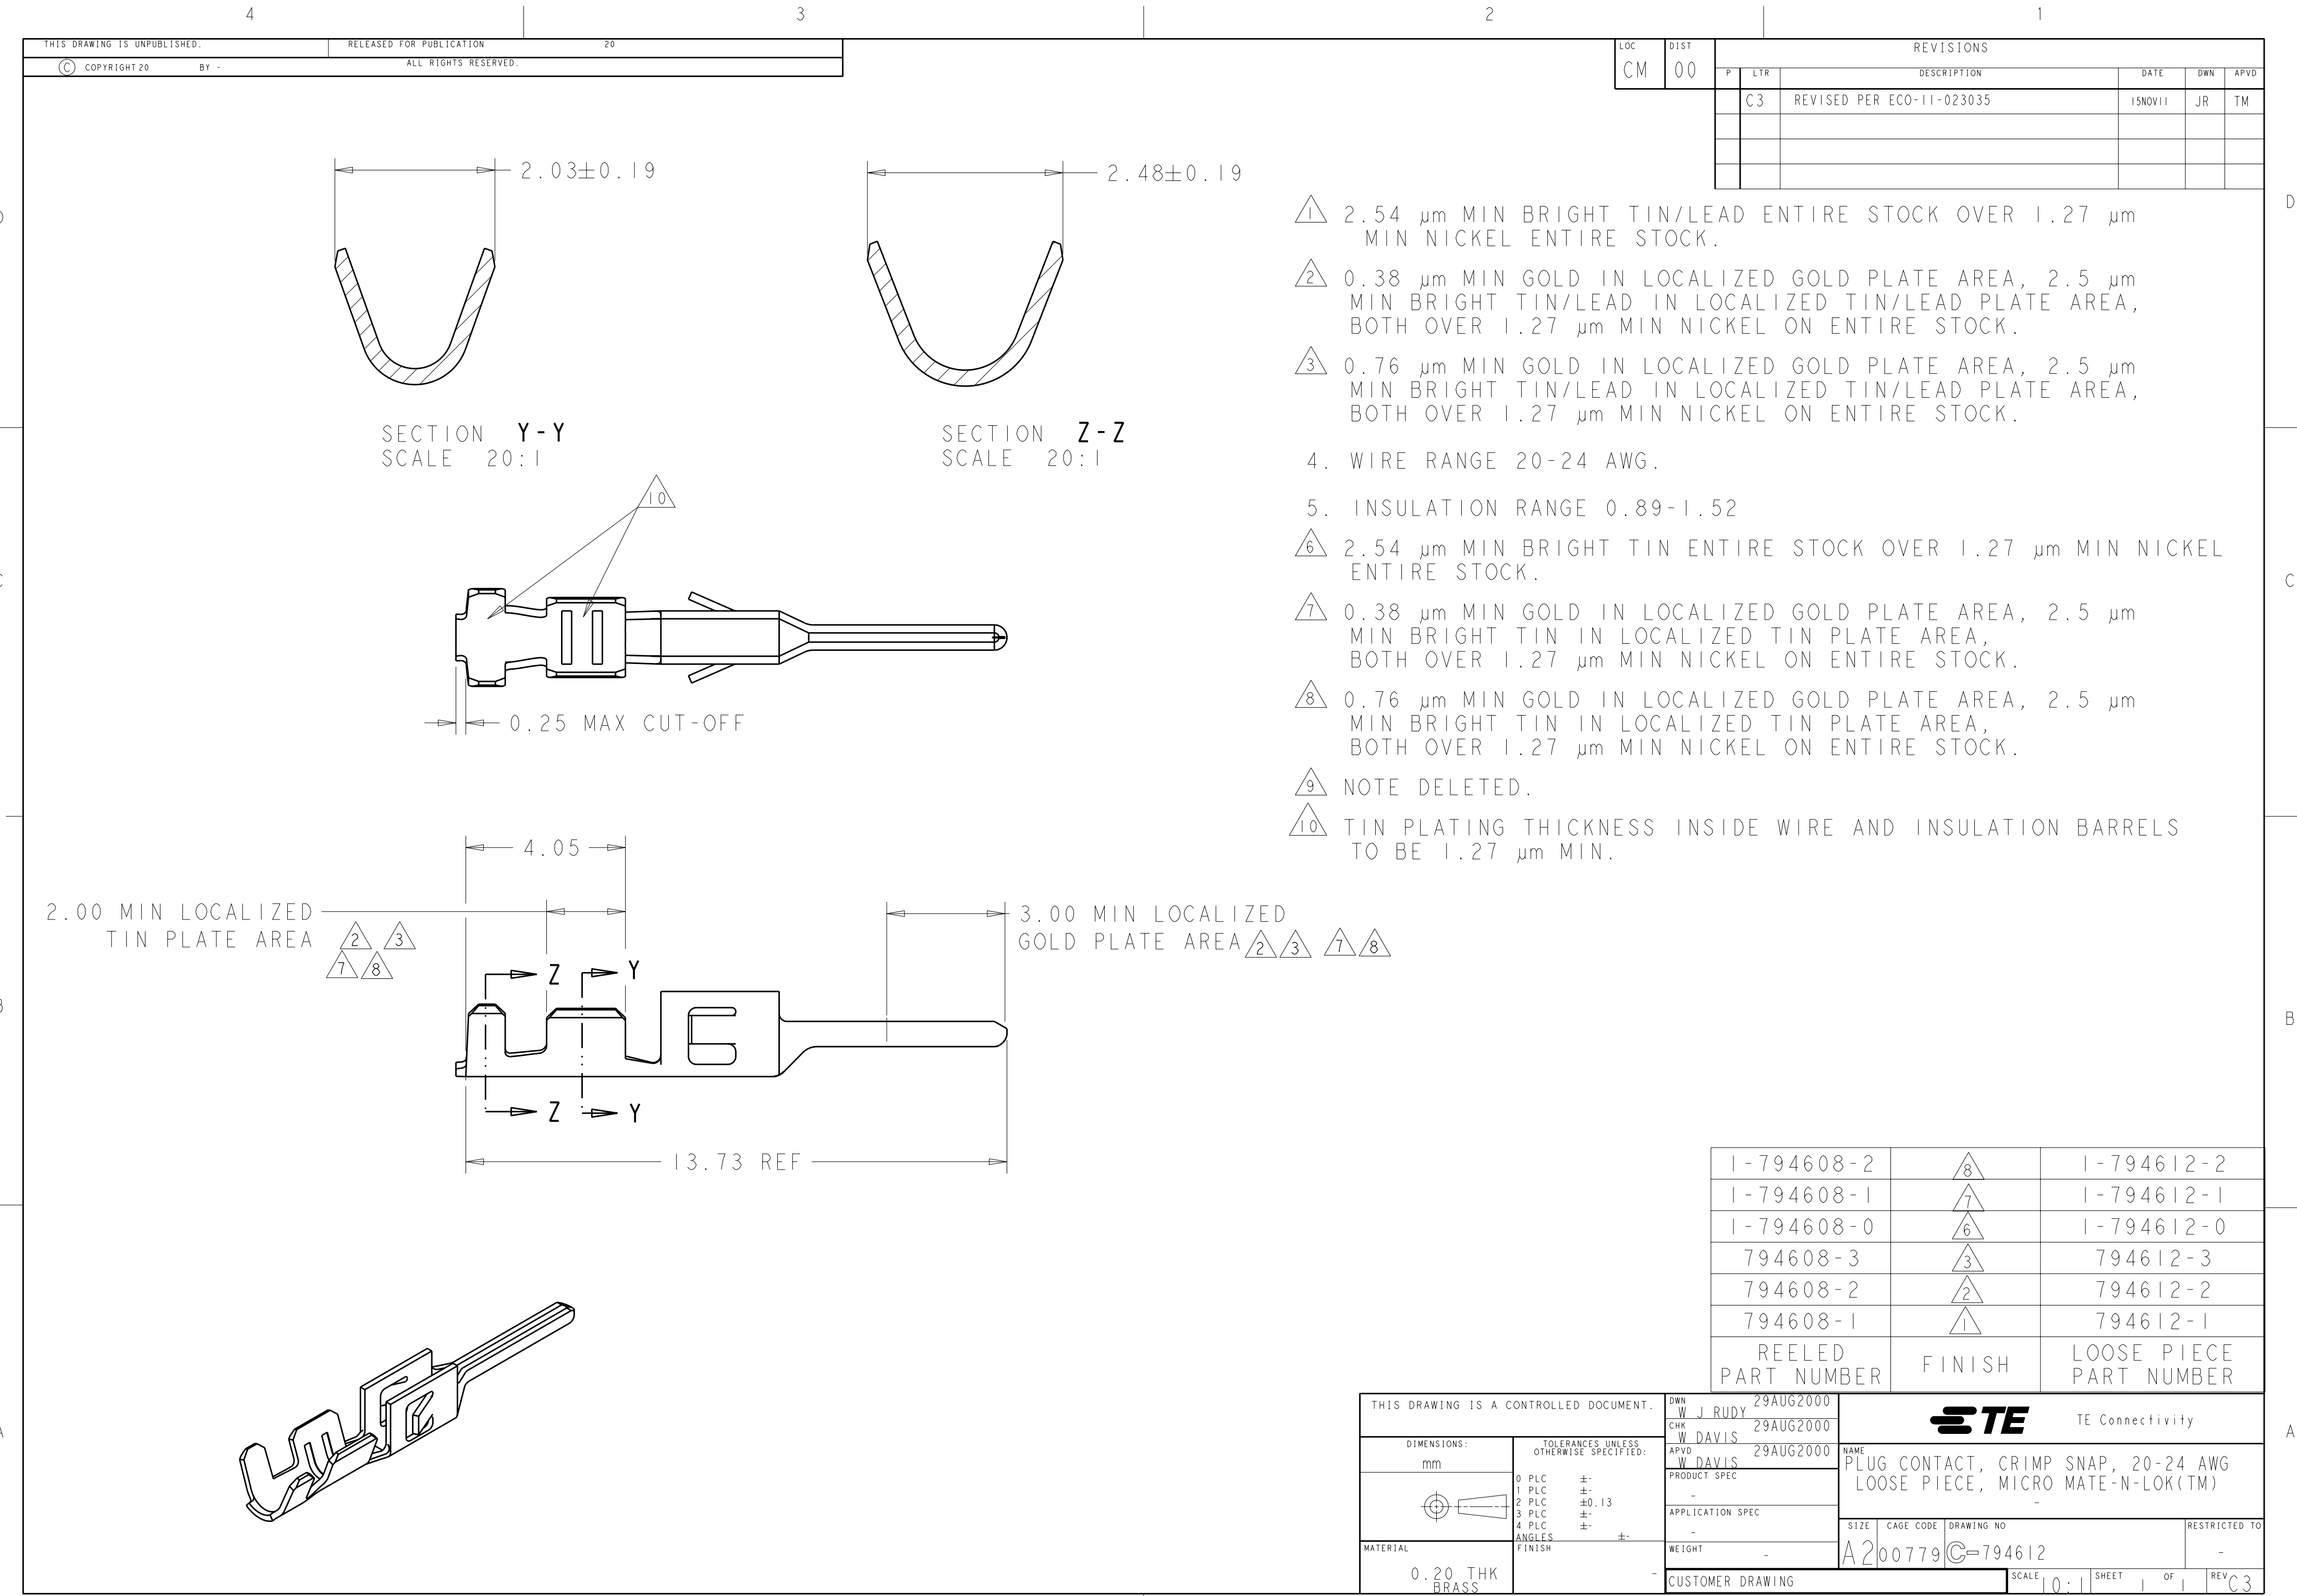

2

3

7

8

2

3

7

8

10

1

2

3

4

5

6

7

8

9

10

2.54 μm MIN BRIGHT TIN/LEAD ENTIRE STOCK OVER 1.27 μm MIN NICKEL ENTIRE STOCK.

0.38 μm MIN GOLD IN LOCALIZED GOLD PLATE AREA, 2.5 μm MIN BRIGHT TIN/LEAD IN LOCALIZED TIN/LEAD PLATE AREA, BOTH OVER 1.27 μm MIN NICKEL ON ENTIRE STOCK.

0.76 μm MIN GOLD IN LOCALIZED GOLD PLATE AREA, 2.5 μm MIN BRIGHT TIN/LEAD IN LOCALIZED TIN/LEAD PLATE AREA, BOTH OVER 1.27 μm MIN NICKEL ON ENTIRE STOCK.

4. WIRE RANGE 20-24 AWG.

5. INSULATION RANGE 0.89-1.52

2.54 μm MIN BRIGHT TIN ENTIRE STOCK OVER 1.27 μm MIN NICKEL ENTIRE STOCK.

0.38 μm MIN GOLD IN LOCALIZED GOLD PLATE AREA, 2.5 μm MIN BRIGHT TIN IN LOCALIZED TIN PLATE AREA, BOTH OVER 1.27 μm MIN NICKEL ON ENTIRE STOCK.

0.76 μm MIN GOLD IN LOCALIZED GOLD PLATE AREA, 2.5 μm MIN BRIGHT TIN IN LOCALIZED TIN PLATE AREA, BOTH OVER 1.27 μm MIN NICKEL ON ENTIRE STOCK.

NOTE DELETED.

TIN PLATING THICKNESS INSIDE WIRE AND INSULATION BARRELS TO BE 1.27 μm MIN.

1-794608-2

1-794608-1

1-794608-0

794608-3

794608-2

794608-1

REELED PART NUMBER

1-794612-2

1-794612-1

1-794612-0

794612-3

794612-2

794612-1

FINISH

LOOSE PIECE PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

W J RUDY

29AUG2000

CHK

W DAVIS

29AUG2000

APVD

W DAVIS

29AUG2000

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±

1 PLC ±

2 PLC ±0.13

3 PLC ±

4 PLC ±

ANGLES ±

FINISH

MATERIAL

0.20 THK BRASS

NAME

PLUG CONTACT, CRIMP SNAP, 20-24 AWG LOOSE PIECE, MICRO MATE-N-LOK(TM)

SIZE

A2

CAGE CODE

00779

DRAWING NO

794612

RESTRICTED TO

SCALE

10:1

SHEET

1

OF

1

REV

C3

1471-9 (3/11)

Pro/ENGINEER DRAWING

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-794612-2](#)