

## Dual Micropower Low-Dropout Voltage Regulators

### General Description

The LP2956 is a micropower voltage regulator with very low quiescent current (170  $\mu$ A typical at light loads) and very low dropout voltage (typically 60 mV at 1 mA load current and 470 mV at 250 mA load current on the main output).

The LP2956 retains all the desirable characteristics of the LP2951, but offers increased output current (main output), an auxiliary LDO adjustable regulated output (75 mA), and additional features.

The auxiliary output is always on (regardless of main output status), so it can be used to power memory circuits.

Quiescent current increases only slightly at dropout, which prolongs battery life.

The error flag goes low if the main output voltage drops out of regulation.

An open-collector auxiliary comparator is included, whose inverting input is tied to the 1.23V reference.

Reverse battery protection is provided.

The parts are available in DIP and surface mount packages.


### Features

- Output voltage adjusts from 1.23V to 29V
- Guaranteed 250 mA current (main output)
- Auxiliary LDO (75 mA) adjustable output
- Auxiliary comparator with open-collector output
- Shutdown pin for main output
- Extremely low quiescent current
- Low dropout voltage
- Extremely tight line and load regulation
- Very low temperature coefficient
- Current and thermal limiting
- Reverse battery protection

### Applications


- High-efficiency linear regulator
- Low dropout battery-powered regulator
- $\mu$ P system regulator with switchable high-current  $V_{CC}$

### Block Diagram

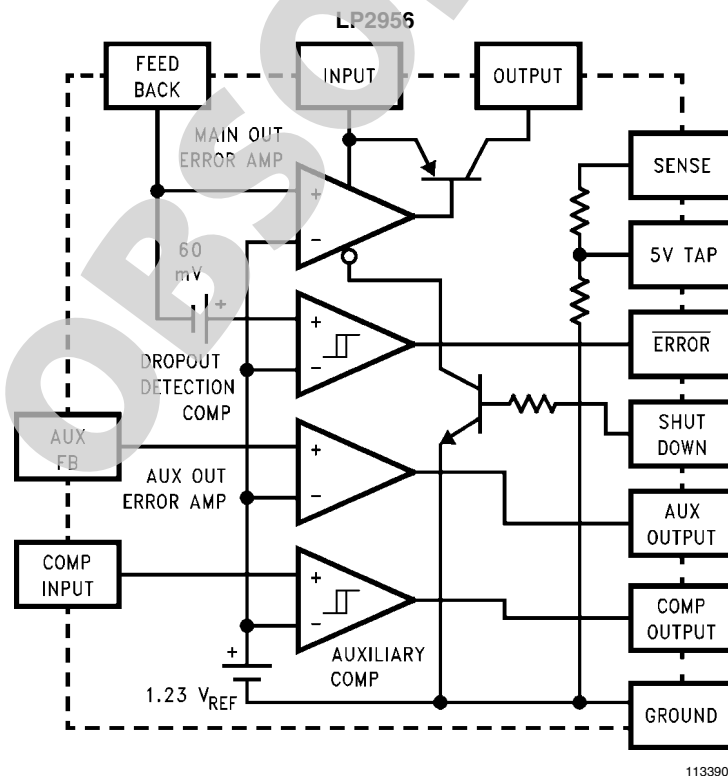


## Connection Diagrams

### 16-Pin DIP

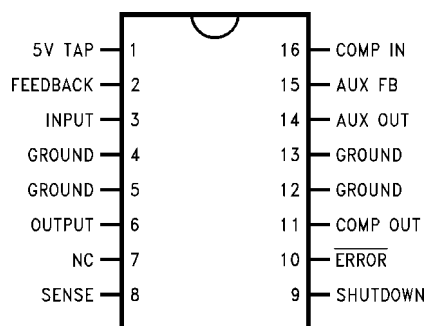

1133902  
**Order Number LP2956IN or LP2956AIN**  
**See NS Package Number N16A**  
**Order Number LP2956AMJ-QML or 5962-9554701QEA**  
**See NS Package Number J16A**

### 16-Pin Surface Mount

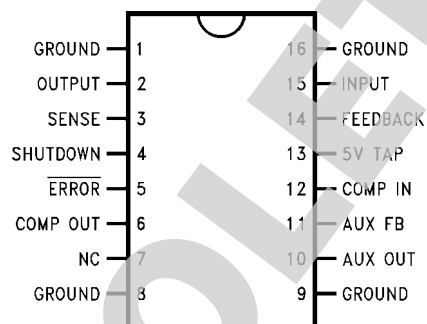

1133903  
**Order Number LP2956IM or LP2956AIM**  
**See NS Package Number M16A**

## Absolute Maximum Ratings *(Note 1)*

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

|   |                    |
|---|--------------------|
| Storage Temperature Range               | –65°C to +150°C    |
| Operating Junction Temperature Range    | –40°C to +125°C    |
| Lead Temperature (Soldering, 5 seconds) | 260°C              |
| Power Dissipation <i>(Note 2)</i>       | Internally Limited |

|   |               |
|---|---------------|
| Input Supply Voltage                              | –20V to +30V  |
| Feedback Input Voltage <i>(Note 3)</i>            | –0.3V to +5V  |
| Aux. Feedback Input Voltage <i>(Note 3)</i>       | –0.3V to +5V  |
| Shutdown Input Voltage <i>(Note 3)</i>            | –0.3V to +30V |
| Comparator Input Voltage <i>(Note 3, Note 4)</i>  | –0.3V to +30V |
| Comparator Output Voltage <i>(Note 3, Note 4)</i> | –0.3V to +30V |
| ESD Rating <i>(Note 16)</i>                       | 2 kV          |

## Electrical Characteristics

Limits in standard typeface are for  $T_J = 25^\circ\text{C}$ , and limits in **boldface type** apply over the full operating temperature range. Limits are guaranteed by production testing or correlation techniques using standard Statistical Quality Control (SQC) methods. Unless otherwise specified:  $V_{IN} = 6\text{V}$ ,  $C_L = 2.2\ \mu\text{F}$  (Main Output) and  $10\ \mu\text{F}$  (Auxiliary Output). Feedback pin is tied to 5V Tap pin,  $C_{IN} = 1\ \mu\text{F}$ ,  $V_{SD} = 0\text{V}$ . Main Output pin is tied to Output Sense pin, Auxiliary Output is programmed for 5V. The main regulator output has a 1 mA load, the auxiliary regulator output has a 100  $\mu\text{A}$  load.

| Symbol                          | Parameter   | Conditions  | Typical | LP2956AI       |                | LP2956I        |                | Units  |
|---------------------------------|---|---|---------|----------------|----------------|----------------|----------------|--------|
|                                 |   |   |         | Min            | Max            | Min            | Max            |        |
| MAIN OUTPUT                     |   |   |         |                |                |                |                |        |
| V <sub>O</sub>                  | Output Voltage  |   | 5.0     | 4.975<br>4.940 | 5.025<br>5.060 | 4.950<br>4.900 | 5.050<br>5.100 | V      |
|                                 |   | 1 mA ≤ I <sub>L</sub> ≤ 250 mA  | 5.0     | 4.930          | 5.070          | 4.880          | 5.120          |        |
| $\frac{\Delta V_O}{\Delta T}$   | Temperature Coefficient   | (Note 5)  | 20      |                | 100            |                | 150            | ppm/°C |
| $\frac{\Delta V_O}{V_O}$        | Line Regulation   | V <sub>IN</sub> = 6V to 30V   | 0.03    |                | 0.1<br>0.2     |                | 0.2<br>0.4     | %      |
| $\frac{\Delta V_O}{V_O}$        | Load Regulation   | I <sub>L</sub> = 1 mA to 250 mA<br>I <sub>L</sub> = 0.1 mA to 1 mA (Note 6) | 0.04    |                | 0.16<br>0.20   |                | 0.20<br>0.30   | %      |
| V <sub>IN</sub> –V <sub>O</sub> | Dropout Voltage<br>(Note 7)   | I <sub>L</sub> = 1 mA   | 60      |                | 100<br>150     |                | 100<br>150     | mV     |
|                                 |   | I <sub>L</sub> = 50 mA  | 240     |                | 300<br>420     |                | 300<br>420     |        |
|                                 |   | I <sub>L</sub> = 100 mA   | 310     |                | 400<br>520     |                | 400<br>520     |        |
|                                 |   | I <sub>L</sub> = 250 mA   | 470     |                | 600<br>800     |                | 600<br>800     |        |
| I <sub>LIMIT</sub>              | Current Limit   | R <sub>L</sub> = 1Ω   | 380     |                | 500<br>530     |                | 500<br>530     | mA     |
| $\frac{\Delta V_O}{\Delta P_D}$ | Thermal Regulation  | (Note 8)  | 0.05    |                | 0.2            |                | 0.2            | %/W    |
| e <sub>n</sub>                  | Output Noise Voltage<br>(10 Hz to 100 KHz)<br>I <sub>L</sub> = 100 mA | C <sub>L</sub> = 2.2 μF   | 400     |                |                |                |                | μV RMS |
|                                 |   | C <sub>L</sub> = 33 μF  | 260     |                |                |                |                |        |
|                                 |   | C <sub>L</sub> = 33 μF (Note 9)   | 80      |                |                |                |                |        |
| V <sub>FB</sub>                 | Feedback Pin Voltage  |   | 1.23    | 1.215          | 1.245          | 1.205          | 1.255          | V      |
| I <sub>FB</sub>                 | Feedback Pin Bias Current   |   | 20      |                | 40<br>60       |                | 40<br>60       | nA     |
| I <sub>O</sub><br>(OFF)         | Output Leakage  | I <sub>(SD IN)</sub> ≥ 1 μA   | 3       |                | 10             |                | 10             | μA     |
|                                 | In Shutdown   | V <sub>IN</sub> = 30V, V <sub>OUT</sub> = 0V                                |         |                | 20             |                | 20             |        |

| Symbol                           | Parameter                                | Conditions  | Typical | LP2956AI     |              | LP2956I      |              | Units  |
|----------------------------------|--|---|---------|--------------|--------------|--------------|--------------|--------|
|                                  |  |   |         | Min          | Max          | Min          | Max          |        |
| AUXILIARY OUTPUT                 |  |   |         |              |              |              |              |        |
| V <sub>FB</sub>                  | Feedback Pin Voltage                     |   | 1.23    | 1.22<br>1.21 | 1.25<br>1.26 | 1.21<br>1.20 | 1.26<br>1.27 | V      |
| $\frac{\Delta V_{FB}}{\Delta T}$ | Feedback Voltage Temperature Coefficient |   | 20      |              |              |              |              | ppm/°C |
| I <sub>FB</sub>                  | Feedback Pin Bias Current                |   | 10      |              | 20<br>30     |              | 20<br>30     | nA     |
| $\frac{\Delta V_O}{V_O}$         | Line Regulation                          | 6V ≤ V <sub>IN</sub> ≤ 30V  | 0.07    |              | 0.3<br>0.5   |              | 0.4<br>0.6   | %      |
| $\frac{\Delta V_O}{V_O}$         | Load Regulation                          | I <sub>L</sub> = 0.1 mA to 1 mA<br>I <sub>L</sub> = 1 mA to 75 mA (Note 10) | 0.1     |              | 0.3<br>0.6   |              | 0.4<br>1.0   | %      |
| V <sub>IN</sub> –V <sub>O</sub>  | Dropout Voltage                          | I <sub>L</sub> = 1 mA   | 100     |              | 200<br>300   |              | 200<br>300   | mV     |
|                                  |  | I <sub>L</sub> = 50 mA  | 400     |              | 600<br>700   |              | 600<br>700   | mV     |
|                                  |  | I <sub>L</sub> = 75 mA  | 500     |              | 700<br>850   |              | 700<br>850   | mV     |
| e <sub>n</sub>                   | Output Noise<br>(10 Hz–100 KHz)          | C <sub>L</sub> = 10 μF  | 300     |              |              |              |              | μV RMS |
|                                  |  | C <sub>L</sub> = 33 μF (Note 9)   | 100     |              |              |              |              |        |
|                                  |  | I <sub>L</sub> = 10 mA  |         |              |              |              |              |        |
| I <sub>LIM</sub>                 | Current Limit                            | V <sub>OUT</sub> = 0V (Note 13)   | 80      |              | 200<br>250   |              | 200<br>250   | mA     |
| $\frac{\Delta V_O}{\Delta P_D}$  | Thermal Regulation                       | (Note 8)  | 0.2     |              | 0.5          |              | 0.5          | %/W    |
| DROPOUT DETECTION COMPARATOR     |  |   |         |              |              |              |              |        |
| I <sub>OH</sub>                  | Output “HIGH” Leakage                    | V <sub>OH</sub> = 30V   | 0.01    |              | 1<br>2       |              | 1<br>2       | μA     |
| V <sub>OL</sub>                  | Output “LOW” Voltage                     | V <sub>IN</sub> = 4V<br>I <sub>O</sub> (COMP) = 400 μA                      | 150     |              | 250<br>400   |              | 250<br>400   | mV     |
| V <sub>THR</sub><br>(max)        | Upper Threshold Voltage                  | (Note 11)   | –240    | –320<br>–380 | –150<br>–100 | –320<br>–380 | –150<br>–100 | mV     |
| V <sub>THR</sub><br>(min)        | Lower Threshold Voltage                  | (Note 11)   | –350    | –450<br>–640 | –230<br>–160 | –450<br>–640 | –230<br>–160 | mV     |
| HYST                             | Hysteresis                               | (Note 11)   | 110     |              |              |              |              | mV     |
| SHUTDOWN INPUT                   |  |   |         |              |              |              |              |        |
| I <sub>IN</sub>                  | Input Current to Disable Output          | (Note 12)   | 0.03    |              | 0.5          |              | 0.5          | μA     |
| V <sub>IH</sub>                  | Shutdown Input High Threshold            | I <sub>(SD IN)</sub> ≥ 1 μA   |         | 900<br>1200  |              | 900<br>1200  |              | mV     |
| V <sub>IL</sub>                  | Shutdown Input Low Threshold             | V <sub>O</sub> ≥ 4.5V   |         |              | 400<br>200   |              | 400<br>200   | mV     |
| AUXILIARY COMPARATOR             |  |   |         |              |              |              |              |        |
| V <sub>T</sub> (high)            | Upper Trip Point                         | (Note 14)   | 1.236   | 1.20<br>1.19 | 1.28<br>1.29 | 1.20<br>1.19 | 1.28<br>1.29 | V      |
| V <sub>T</sub> (low)             | Lower Trip Point                         | (Note 14)   | 1.230   | 1.19<br>1.18 | 1.27<br>1.28 | 1.19<br>1.18 | 1.27<br>1.28 | V      |
| HYST                             | Hysteresis                               |   | 6       |              |              |              |              | mV     |

| Symbol                    | Parameter                                | Conditions  | Typical | LP2956AI   |            | LP2956I    |            | Units   |
|---------------------------|--|---|---------|------------|------------|------------|------------|---------|
|                           |  |   |         | Min        | Max        | Min        | Max        |         |
| $I_{OH}$                  | Output "HIGH" Leakage                    | $V_{OH} = 30V$<br>$V_{IN} (COMP) = 1.3V$                                  | 0.01    |            | 1<br>2     |            | 1<br>2     | $\mu A$ |
| $V_{OL}$                  | Output "LOW" Voltage                     | $V_{IN} (COMP) = 1.1V$<br>$I_O (COMP) = 400 \mu A$                        | 150     |            | 250<br>400 |            | 250<br>400 | mV      |
| $I_B$                     | Input Bias Current                       | $0 \leq V_{IN} (COMP) \leq 5V$  | 10      | -30<br>-50 | 30<br>50   | -30<br>-50 | 30<br>50   | nA      |
| <b>GROUND PIN CURRENT</b> |  |   |         |            |            |            |            |         |
| $I_{GND}$                 | Ground Pin Current<br>(Note 15)          | $I_L$ (Main Out) = 1 mA<br>$I_L$ (Aux. Out) = 0.1 mA                      | 170     |            | 250<br>280 |            | 250<br>280 | $\mu A$ |
|                           |  | $I_L$ (Main Out) = 50 mA<br>$I_L$ (Aux. Out) = 1 mA                       | 1.1     |            | 2<br>2.5   |            | 2<br>2.5   | mA      |
|                           |  | $I_L$ (Main Out) = 100 mA<br>$I_L$ (Aux. Out) = 1 mA                      | 3       |            | 6<br>8     |            | 6<br>8     |         |
|                           |  | $I_L$ (Main Out) = 250 mA<br>$I_L$ (Aux. Out) = 1 mA                      | 16      |            | 28<br>33   |            | 28<br>33   |         |
|                           |  | $I_L$ (Main Out) = 1 mA<br>$I_L$ (Aux. Out) = 50 mA                       | 3       |            | 6<br>8     |            | 6<br>8     |         |
|                           |  | $I_L$ (Main Out) = 1 mA<br>$I_L$ (Aux. Out) = 75 mA                       | 6       |            | 8<br>10    |            | 8<br>10    |         |
|                           |  |   |         |            |            |            |            |         |
|                           |  |   |         |            |            |            |            |         |
| $I_{GND}$                 | Ground Pin Current at Dropout (Note 15)  | $V_{IN} = 4.5V$<br>$I_L$ (Main Out) = 0.1 mA<br>$I_L$ (Aux. Out) = 0.1 mA | 270     |            | 325<br>350 |            | 325<br>350 | $\mu A$ |
| $I_{GND}$                 | Ground Pin Current at Shutdown (Note 15) | No Load on Either Output<br>$I_{(SD IN)} \geq 1 \mu A$                    | 120     |            | 180<br>200 |            | 180<br>200 |         |

**Note 1:** Absolute maximum ratings indicate limits beyond which damage to the component may occur. Electrical specifications do not apply when operating the device outside of its rated operating conditions.

**Note 2:** The maximum allowable power dissipation is a function of the maximum junction temperature,  $T_J(max)$ , the junction-to-ambient thermal resistance,  $\theta_{JA}$ , and the ambient temperature,  $T_A$ . The maximum allowable power dissipation at any ambient temperature is calculated using:  $P(max) = \frac{T_J(max) - T_A}{\theta_{JA}}$

$$P(max) = \frac{T_J(max) - T_A}{\theta_{JA}}$$

Exceeding the maximum allowable power dissipation will cause excessive die temperature, and the regulator will go into thermal shutdown. See Application Hints for additional information on heat sinking and thermal resistance.

**Note 3:** When used in dual-supply systems where the regulator load is returned to a negative supply, the output voltage must be diode-clamped to ground.

**Note 4:** May exceed the input supply voltage.

**Note 5:** Output or reference voltage temperature coefficient is defined as the worst case voltage change divided by the total temperature range.

**Note 6:** Load regulation is measured at constant junction temperature using low duty cycle pulse testing. Two separate tests are performed, one for the range of 100  $\mu A$  to 1 mA and one for the 1 mA to 250 mA range. Changes in output voltage due to heating effects are covered by the thermal regulation specification.

**Note 7:** Dropout voltage is defined as the input to output differential at which the output voltage drops 100 mV below the value measured with a 1V differential. At very low values of programmed output voltage, the input voltage minimum of 2V (2.3V over temperature) must be observed.

**Note 8:** Thermal regulation is the change in output voltage at a time T after a change in power dissipation, excluding load or line regulation effects. Specifications are for a 200 mA load pulse at  $V_{IN} = 20V$  (3W pulse) for T = 10 ms on the Main regulator output. For the Auxiliary regulator output, specifications are for a 66 mA load pulse at  $V_{IN} = 20V$  (1W pulse) for T = 10 ms.

**Note 9:** Connect a 0.1  $\mu F$  capacitor from the output to the feedback pin.

**Note 10:** Load regulation is measured at constant junction temperature using low duty cycle pulse testing. Two separate tests are performed, one for the range of 100  $\mu A$  to 1 mA and one for the 1 mA to 75 mA range. Changes in output voltage due to heating effects are covered by the thermal regulation specification.

**Note 11:** Dropout detection comparator thresholds are expressed as changes in a 5V output. To express the threshold voltages in terms of a differential at the Feedback terminal, divide by the error amplifier gain =  $V_{OUT}/V_{REF}$ .

**Note 12:** The shutdown input equivalent circuit is the base of a grounded-emitter NPN transistor in series with a current-limiting resistor. Pulling the shutdown input high turns off the main regulator. For more details, see Application Hints.


**Note 13:** The auxiliary regulator output has foldback limiting, which means the output current reduces with output voltage. The tested limit is for  $V_{OUT} = 0V$ , so the output current will be higher at higher output voltages.

**Note 14:** This test is performed with the auxiliary comparator output sinking 400  $\mu A$  of current. At the upper trip point, the comparator output must be  $\geq 2.4V$ . At the low trip point, the comparator output must be  $\leq 0.4V$ .


**Note 15:** Ground pin current is the regulator quiescent current. The total current drawn from the source is the sum of the ground pin current, output load current, and current through the external resistive dividers (if used).

**Note 16:** All pins are rated for 2 kV, except for the auxiliary feedback pin which is rated for 1.2 kV (human body model, 100 pF discharged through 1.5 k $\Omega$ ).


**Typical Performance Characteristics** Unless otherwise specified:  $V_{IN} = 6V$ ,  $C_L = 2.2 \mu F$  (Main Output) and  $10 \mu F$  (Auxiliary Output), Feedback is tied to 5V Tap pin,  $C_{IN} = 1 \mu F$ ,  $V_{SD} = 0V$ , Main Output pin is tied to Output Sense pin, Auxiliary Output is programmed for 5V. The main regulator output has a 1 mA load, the auxiliary output has a 100  $\mu A$  load.

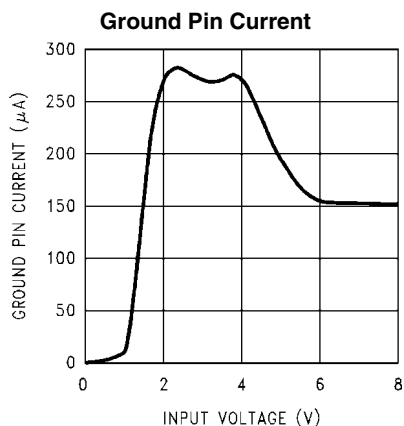


1133918

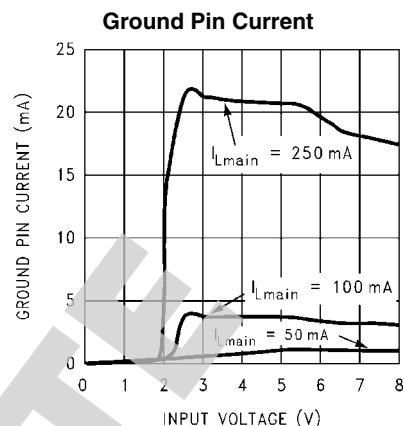


1133919

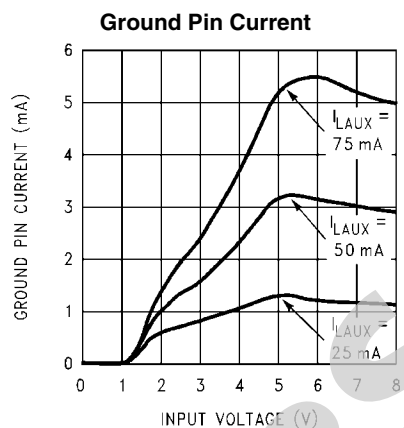


1133920

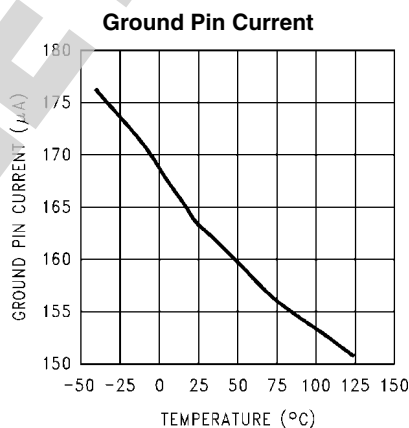







1133921

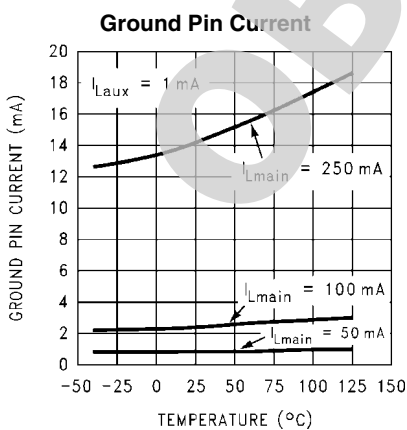


1133922

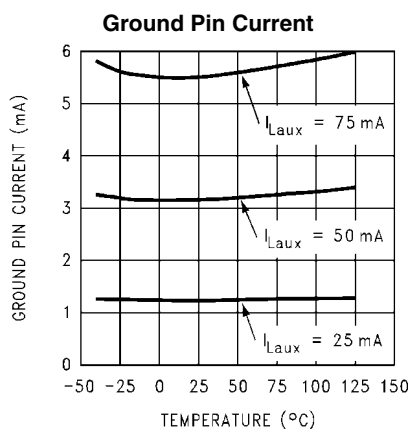


1133923

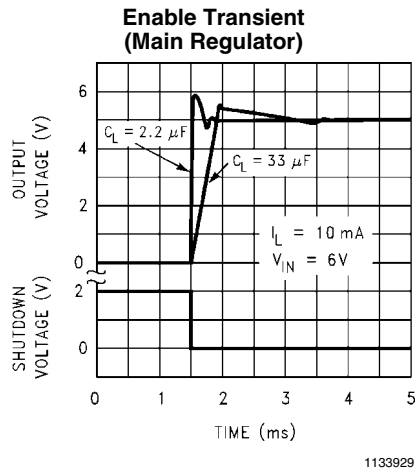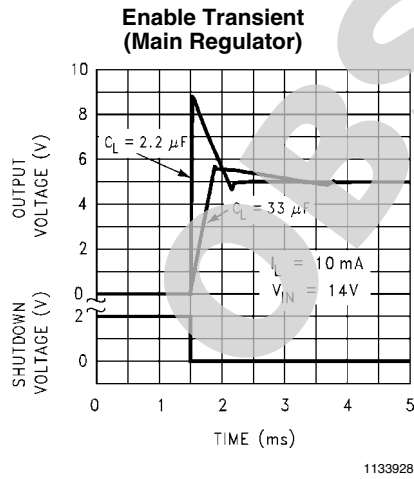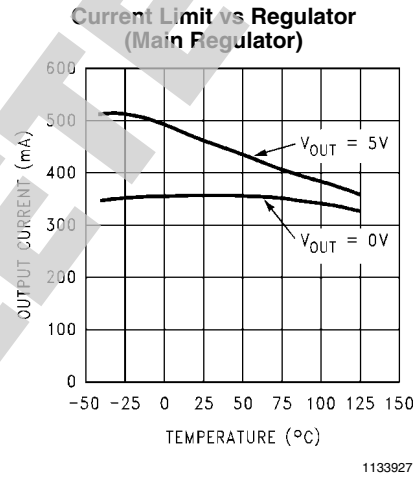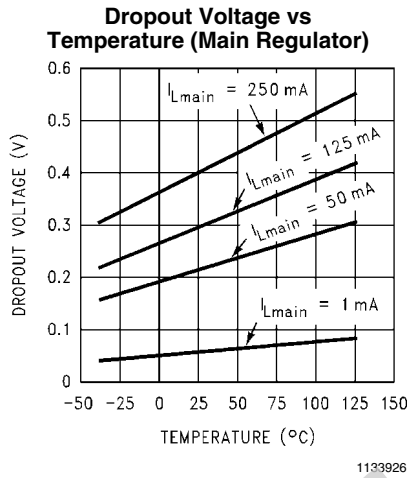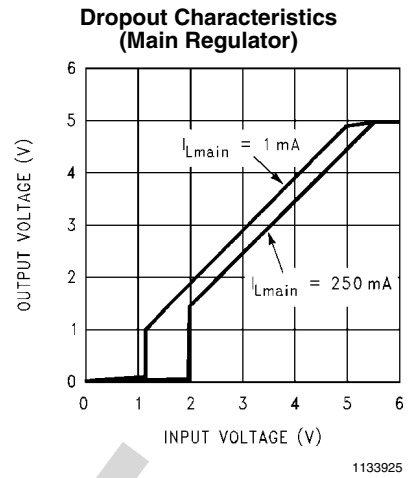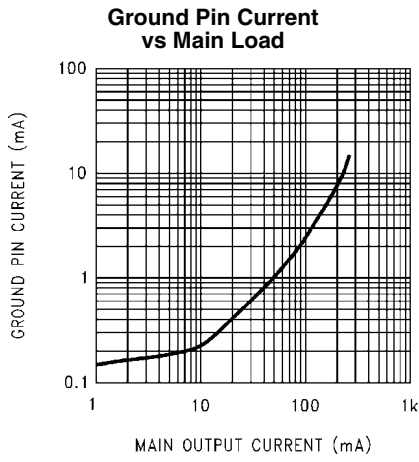


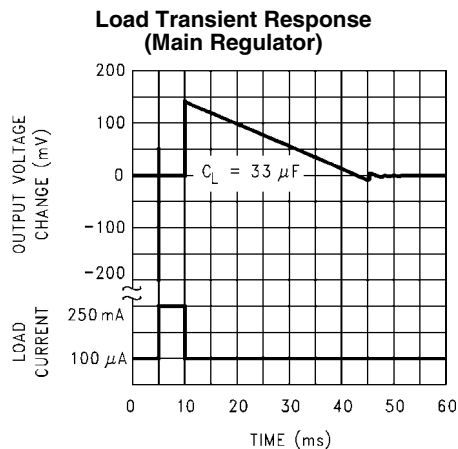


1133930

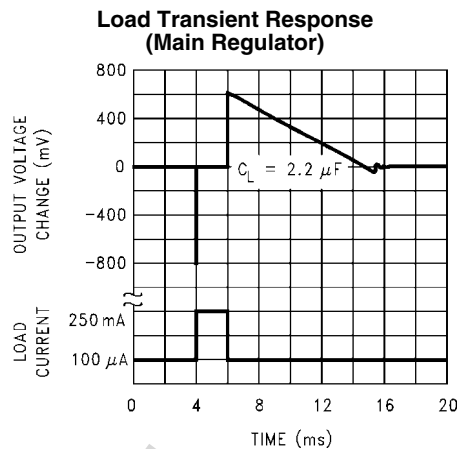


1133931

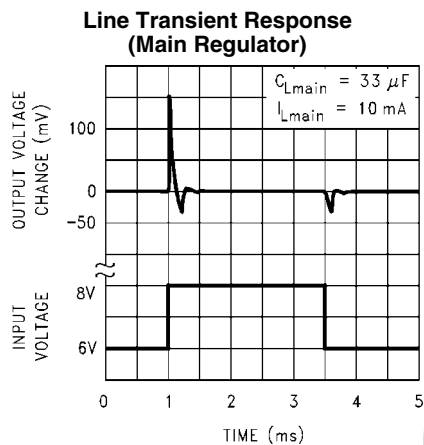


1133932

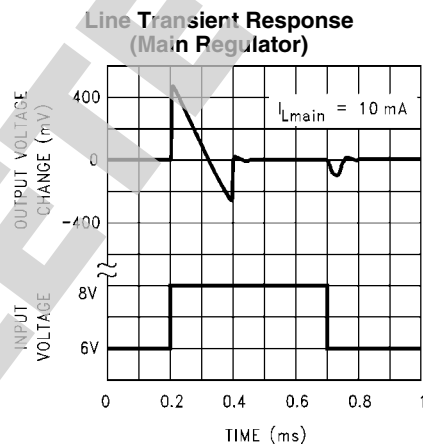

1133933

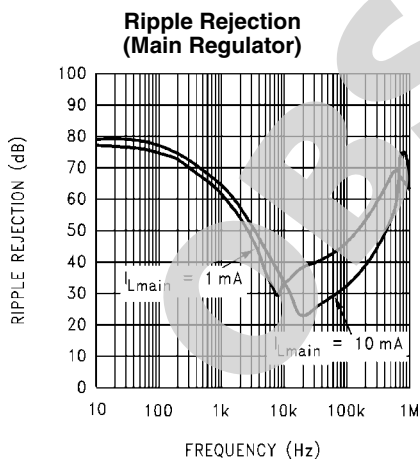


1133934

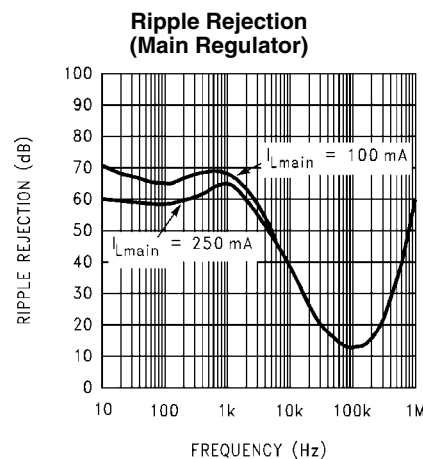

1133935




**Ripple Rejection  
(Main Regulator)**

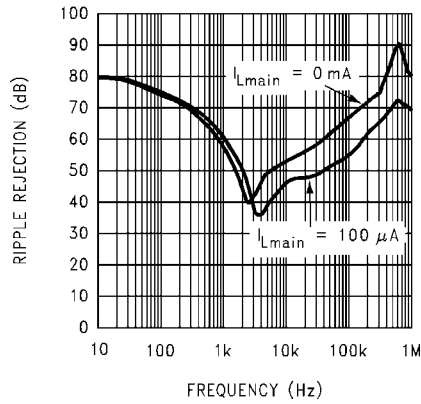


1133936

**Thermal Regulation  
(Main Regulator)**

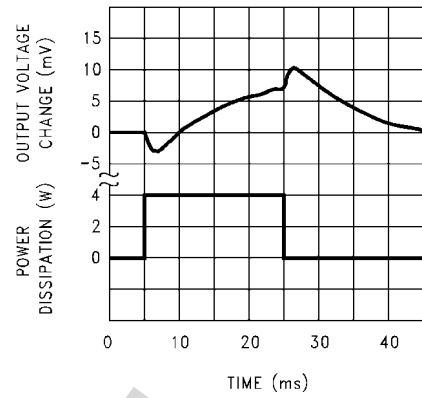


1133937

**Output Impedance  
(Main Regulator)**

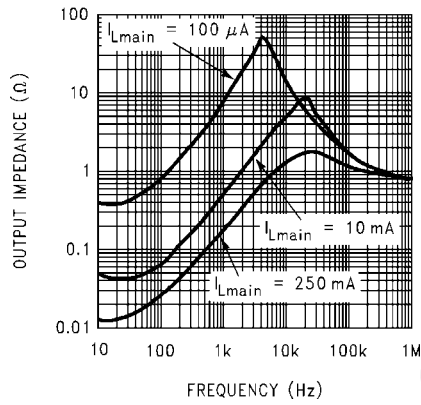


1133938

**Output Noise Voltage  
(Main Regulator)**

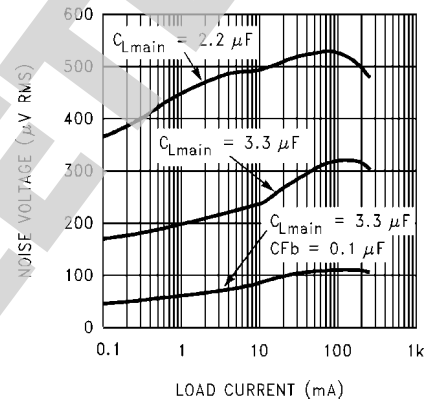


1133939

**Feedback Bias Current**

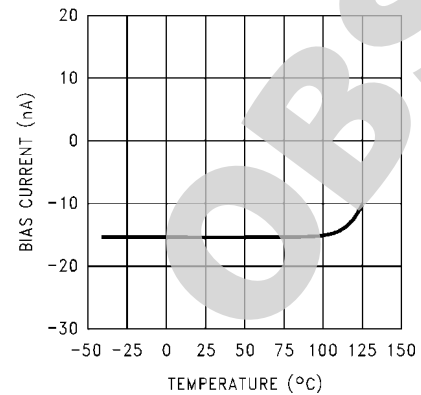


1133940


**Divider Resistance**

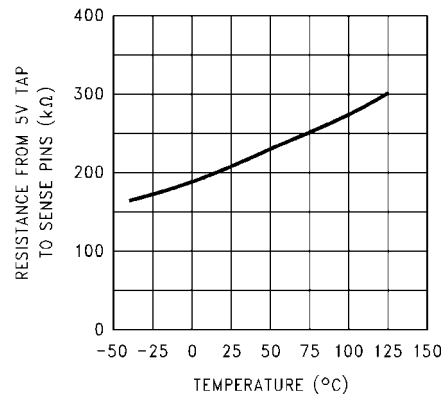


1133941

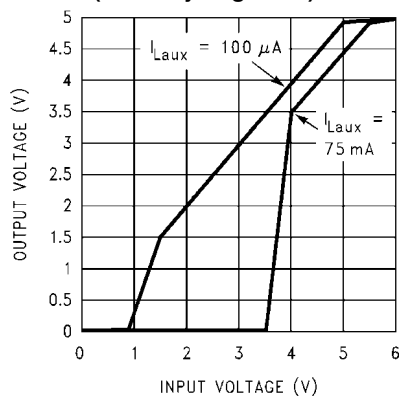**Dropout Characteristics  
(Auxiliary Regulator)**


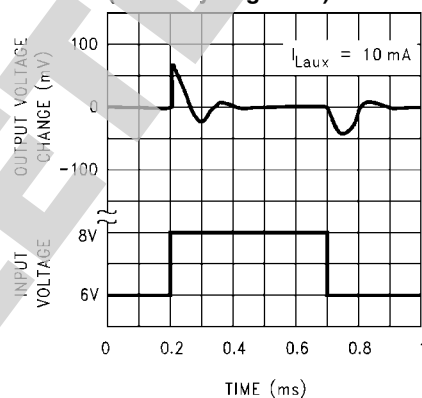
1133942

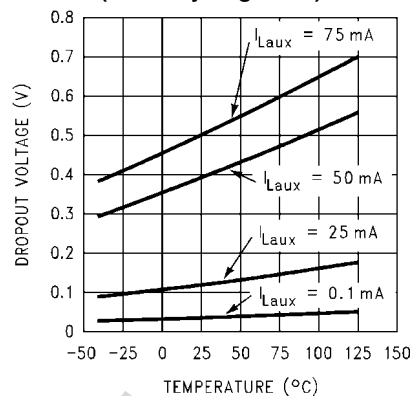**Dropout vs Temperature  
(Auxiliary Regulator)**


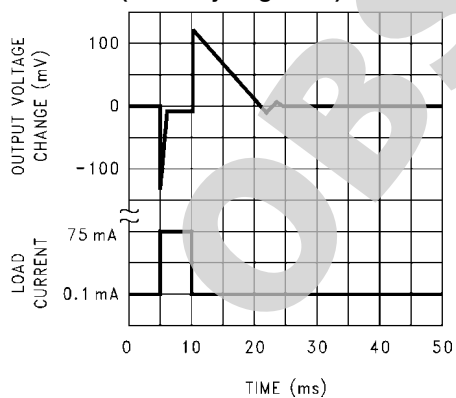
1133943

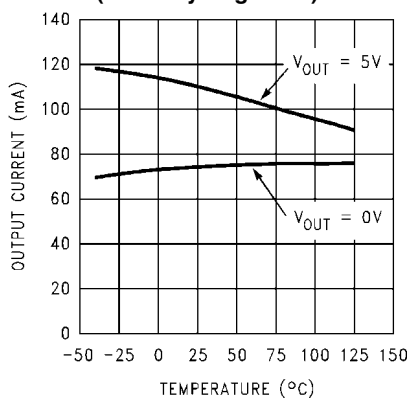**Current Limit vs Temperature  
(Auxiliary Regulator)**


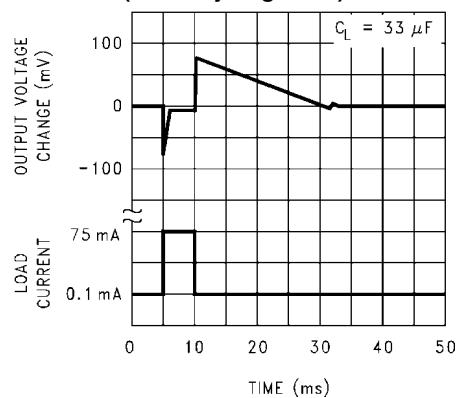
1133944

**Line Transient Response  
(Auxiliary Regulator)**


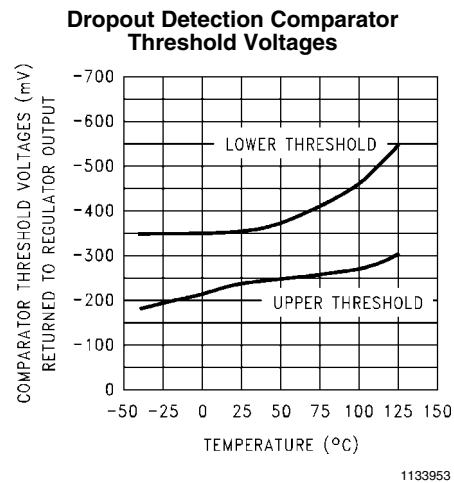
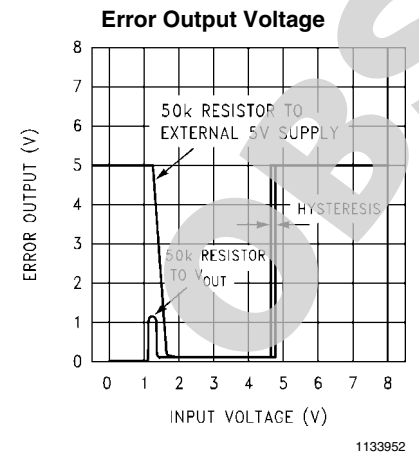
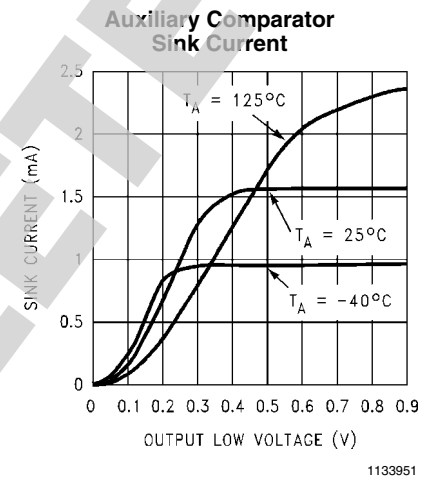
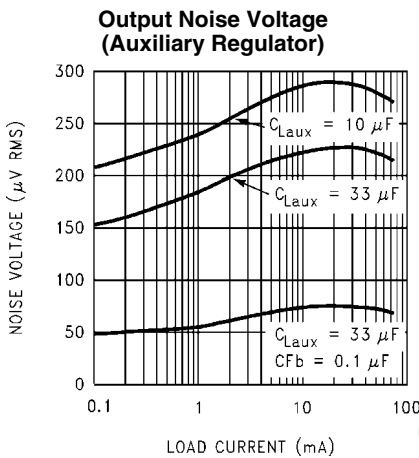
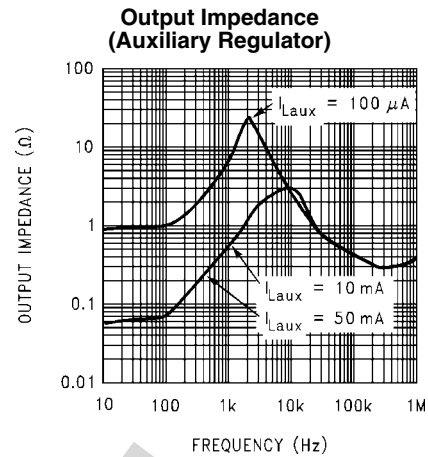
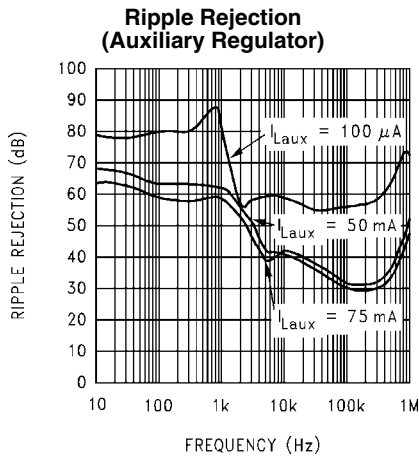
1133945

**Load Transient Response  
(Auxiliary Regulator)**


1133946

**Load Transient Response  
(Auxiliary Regulator)**


1133947




## Application Hints

### HEATSINK REQUIREMENTS

A heatsink may be required with the LP2956 depending on the maximum power dissipation and maximum ambient temperature of the application. Under all expected operating conditions, the junction temperature must be within the range specified under Absolute Maximum Ratings.

To determine if a heatsink is required, the maximum power dissipated by the regulator,  $P(\max)$ , must be calculated. It is important to remember that if the regulator is powered from a transformer connected to the AC line, the **maximum specified AC input voltage** must be used (since this produces the maximum DC input voltage to the regulator). [Figure 1](#) shows the voltages and currents which are present in the circuit. The formula for calculating the power dissipated in the regulator is also shown in [Figure 1](#) (the currents and power due to external resistive dividers are not included, and are typically negligible).

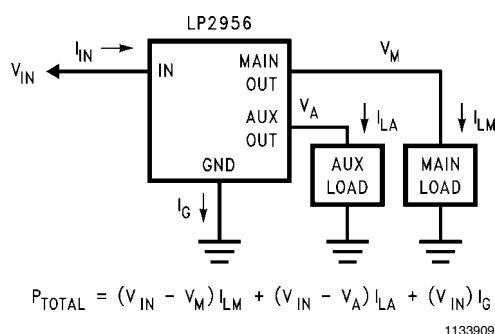

**FIGURE 1. Current/Voltage Diagram**

The next parameter which must be calculated is the maximum allowable temperature rise,  $T_R(\max)$ . This is calculated by using the formula:

$$T_R(\max) = T_J(\max) - T_A(\max)$$

where:  $T_J(\max)$  is the maximum allowable junction temperature

$T_A(\max)$  is the maximum ambient temperature

Using the calculated values for  $T_R(\max)$  and  $P(\max)$ , the required value for junction-to-ambient thermal resistance,  $\theta_{(J-A)}$ , can now be found:


$$\theta_{(J-A)} = T_R(\max)/P(\max)$$

The heatsink for the LP2956 is made using the PC board copper. The heat is conducted from the die, through the lead frame (inside the part), and out the pins which are soldered to the PC board. The pins used for heat conduction are shown in [Table 1](#).

**TABLE 1.**

| Part      | Package            | Pins         |
|-----------|--------------------|--------------|
| LP2956IN  | 16-Pin Plastic DIP | 4, 5, 12, 13 |
| LP2956AIN | 16-Pin Plastic DIP | 4, 5, 12, 13 |
| LP2956IM  | 16-Pin Surface Mt. | 1, 8, 9, 16  |
| LP2956AIM | 16-Pin Surface Mt. | 1, 8, 9, 16  |

[Figure 2](#) shows copper patterns which may be used to dissipate heat from the LP2956:

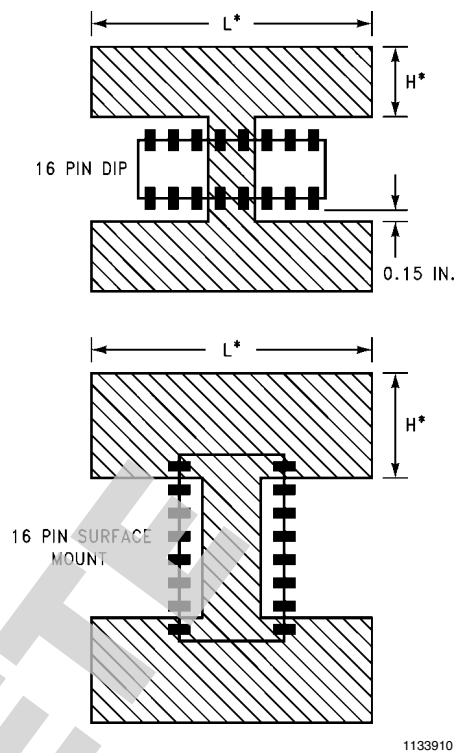

**FIGURE 2. Copper Heatsink Patterns**

[Table 2](#) shows some typical values of junction-to-ambient thermal resistance ( $\theta_{J-A}$ ) for values of L and W (1 oz. copper).

**TABLE 2.**

| Package              | L (In.) | H (In.) | $\theta_{J-A}$ ( $^{\circ}\text{C/W}$ ) |
|----------------------|---------|---------|---|
| 16-Pin Plastic DIP   | 1       | 0.5     | 70                                      |
|                      | 2       | 1       | 60                                      |
|                      | 3       | 1.5     | 58                                      |
|                      | 4       | 0.19    | 66                                      |
|                      | 6       | 0.19    | 66                                      |
| 16-Pin Surface Mount | 1       | 0.5     | 83                                      |
|                      | 2       | 1       | 70                                      |
|                      | 3       | 1.5     | 67                                      |
|                      | 6       | 0.19    | 69                                      |
|                      | 4       | 0.19    | 71                                      |
|                      | 2       | 0.19    | 73                                      |

### EXTERNAL CAPACITORS

A 2.2  $\mu\text{F}$  (or greater) capacitor is required between the main output pin and ground to assure stability. The auxiliary output requires 10  $\mu\text{F}$  to ground. Without these capacitors, the part may oscillate. Most types of tantalum or aluminum electrolytics will work here. Film types will work, but are more expensive. Many aluminum electrolytics contain electrolytes which freeze at  $-30^{\circ}\text{C}$ , which requires the use of solid tantalums below  $-25^{\circ}\text{C}$ . The important characteristic of the capacitors is an ESR of 5 $\Omega$  (or less) on the main regulator output and an ESR of 1 $\Omega$  (or less) on the auxiliary regulator output (the ESR may increase by a factor of 20 or 30 as the temperature is reduced from  $+25^{\circ}\text{C}$  to  $-30^{\circ}\text{C}$ ). The value of these capacitors may be increased without limit.

The main output requires less capacitance at lighter load currents. This capacitor can be reduced to 0.68  $\mu\text{F}$  for currents below 10 mA or 0.22  $\mu\text{F}$  for currents below 1 mA.

Programming the main output for voltages below 5V requires more output capacitance for stability. For the worst-case condition of 1.23V output and 250 mA of load current, a 6.8  $\mu\text{F}$  (or larger) capacitor should be used.

A 1  $\mu\text{F}$  capacitor should be placed from the input pin to ground if there is more than 10 inches of wire between the input and the AC filter capacitor or if a battery input is used.

Stray capacitance to the Feedback terminal can cause instability. This problem is most likely to appear when using high value external resistors to set the output voltage. Adding a 100 pF capacitor between the Output and Feedback pins and increasing the output capacitance to 6.8  $\mu\text{F}$  (or greater) will cure the problem.

### MINIMUM LOAD ON MAIN OUTPUT

When setting the main output voltage using an external resistive divider, a minimum current of 10  $\mu\text{A}$  is recommended through the resistors to provide a minimum load.

It should be noted that a minimum load current is specified in several of the electrical characteristic test conditions, so the specified value must be used to obtain test limit correlation.

### PROGRAMMING THE MAIN OUTPUT VOLTAGE


The main output may be pin-strapped for 5V operation using its internal resistive divider by tying the Output and Sense pins together and also tying the Feedback and 5V Tap pins together.

Alternatively, it may be programmed for any voltage between the 1.23V reference and the 29V maximum rating using an external pair of resistors (see Figure 3). The complete equation for the output voltage is:

$$V_{\text{MAIN OUT}} = V_{\text{REF}} \times \left( 1 + \frac{R_1}{R_2} \right) + (I_{\text{FB}} \times R_1)$$

where  $V_{\text{REF}}$  is the 1.23V reference and  $I_{\text{FB}}$  is the Feedback pin bias current (–20 nA typical). The minimum recommended load current of 1  $\mu\text{A}$  sets an upper limit of 1.2 M $\Omega$  on the value of  $R_2$  in cases where the regulator must work with no load (see MINIMUM LOAD).

If  $I_{\text{FB}}$  is ignored in the calculation of the output voltage, it will produce a small error in  $V_{\text{MAIN OUT}}$ . Choosing  $R_2 = 100 \text{ k}\Omega$  will reduce this error to 0.16% (typical) while increasing the resistor program current to 12  $\mu\text{A}$ . Since the typical quiescent current is 130  $\mu\text{A}$ , this added current is negligible.

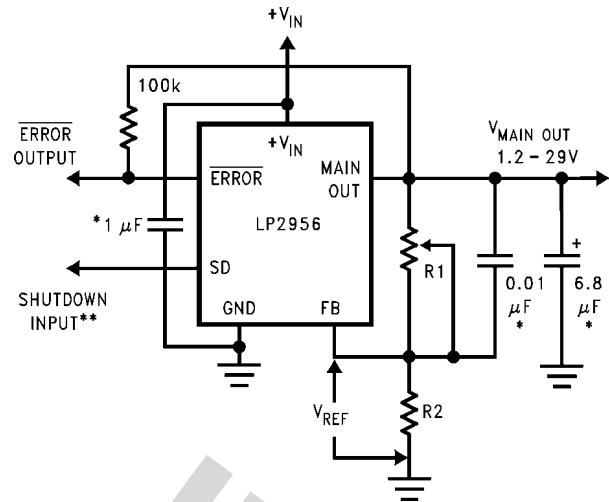

1133911

\*See Application Hints

\*\*Drive with high to shut down

FIGURE 3. Adjustable Regulator

### DROPOUT VOLTAGE


The dropout voltage of the regulator is defined as the minimum input-to-output voltage differential required for the output voltage to stay within 100 mV of the output voltage measured with a 1V differential. The dropout voltage is independent of the programmed output voltage.

### DROPOUT DETECTION COMPARATOR

This comparator produces a logic “LOW” whenever the main output falls out of regulation by more than about 5%. This figure results from the comparator's built-in offset of 60 mV divided by the 1.23V reference (refer to block diagram). The 5% low trip level remains constant regardless of the programmed output voltage. An out-of-regulation condition can result from low input voltage, current limiting, or thermal limiting.

Figure 4 gives a timing diagram showing the relationship between the main output voltage, the ERROR output, and input voltage as the input voltage is ramped up and down to a regulator whose main output is programmed for 5V. The ERROR signal becomes low at about 1.3V input. It goes high at about 5V input, where the main output equals 4.75V. Since the dropout voltage is load dependent, the input voltage trip points will vary with load current. The main output voltage trip point does not vary.

The comparator has an open-collector output which requires an external pull-up resistor. This resistor may be connected to the regulator main output or some other supply voltage. Using the main output prevents an invalid “HIGH” on the comparator output which occurs if it is pulled up to an external voltage while the regulator input voltage is reduced below 1.3V. In selecting a value for the pull-up resistor, note that while the output can sink 400  $\mu\text{A}$ , this current adds to battery drain. Suggested values range from 100 k $\Omega$  to 1 M $\Omega$ . The resistor is not required if the output is unused.

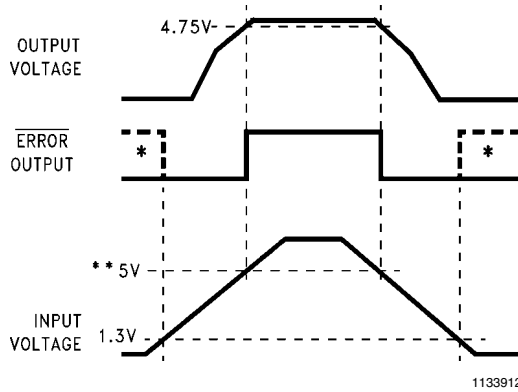

\*In shutdown mode,  $\overline{\text{ERROR}}$  will go high if it has been pulled up to an external supply. To avoid this invalid response, pull up to regulator output  
 \*\*Exact value depends on dropout voltage. (See Application Hints)

FIGURE 4. ERROR Output Timing

If a single pull-up resistor is used to the regulator output, the error flag may briefly rise up to about 1.3V as the input voltage ramps up or down through the 0V to 1.3V region.

In some cases, this 1.3V signal may be mis-interpreted as a false high by a  $\mu\text{P}$  which is still "alive" with 1.3V applied to it. To prevent this, the user may elect to use **two** resistors which are equal in value on the error output (one connected to ground and the other connected to the regulator output).

If this two-resistor divider is used, the error output will only be pulled up to about 0.6V (not 1.3V) during power-up or power-down, so it can not be interpreted as a high signal. When the regulator output is at 5V, the error output will be 2.5V, which is still clearly a high signal.

#### OUTPUT ISOLATION

The regulator outputs can be left connected to an active voltage source (such as a battery) with the regulator input power shut off, as long as the regulator ground pin is connected to ground. If the ground pin is left floating, damage to the regulator can occur if the output is pulled up by an external voltage source.

#### REDUCING MAIN OUTPUT NOISE


In reference applications it may be advantageous to reduce the AC noise present on the main output. One method is to reduce regulator bandwidth by increasing output capacitance. This is relatively inefficient, since large increases in capacitance are required to get significant improvement.

Noise can be reduced more effectively by a bypass capacitor placed across  $R1$  (refer to Figure 3). The formula for selecting the capacitor to be used is:

$$CB = \frac{1}{2\pi R1 \times 20 \text{ Hz}}$$

This gives a value of about 0.1 $\mu\text{F}$ . When this is used, the output capacitor must be 6.8 $\mu\text{F}$  (or greater) to maintain stability. The 0.1 $\mu\text{F}$  capacitor reduces the high frequency noise gain of the circuit to unity, lowering the output noise from 260  $\mu\text{V}$  to 80  $\mu\text{V}$  using a 10 Hz to 100 kHz bandwidth. Also, noise is

no longer proportional to the output voltage, so improvements are more pronounced at higher output voltages.

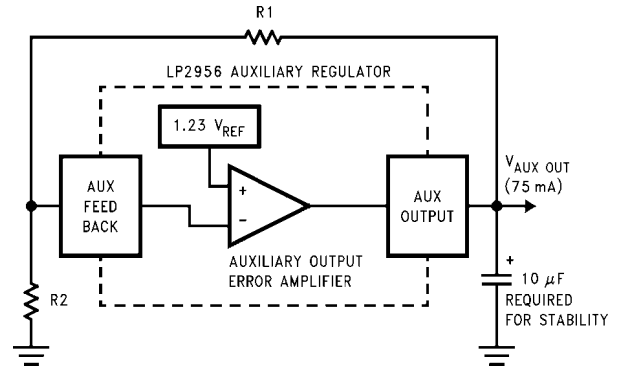

1133913

$$V_{\text{AUX OUT}} = V_{\text{REF}} \left( 1 + \frac{R1}{R2} \right) + (I_{\text{FB}} \times R1)$$

where:  $V_{\text{REF}} = 1.23\text{V}$  and  $I_{\text{FB}} = -10 \text{ nA}$  (typical)

FIGURE 5. Auxiliary Adjustable Regulator


#### AUXILIARY LDO OUTPUT

The LP2956 has an auxiliary LDO regulator output (which can source up to 75 mA) that is adjustable for voltages from 1.23V to 29V.

The output voltage is set by an external resistive divider, as shown in Figure 5. The maximum output current is 75 mA, and the output requires 10  $\mu\text{F}$  from the output to ground for stability, regardless of load current.

#### SHUTDOWN INPUT

The shutdown input equivalent circuit is shown in Figure 6. The main regulator output is shut down when the NPN transistor is turned ON.



1133914

FIGURE 6. Shutdown Circuitry


The current into the input should be at least 0.5  $\mu\text{A}$  to assure the output shutdown function. A resistor may be placed in series with the input to minimize current draw in shutdown mode, provided this minimum input current requirement is met.

#### IMPORTANT:

The shutdown input must not be left floating: a pull-down resistor (10 k $\Omega$  to 50 k $\Omega$  recommended) must be connected between the shutdown input and ground in cases where the input is not actively pulled low.

# Schematic Diagram

LP2956/LP2956A

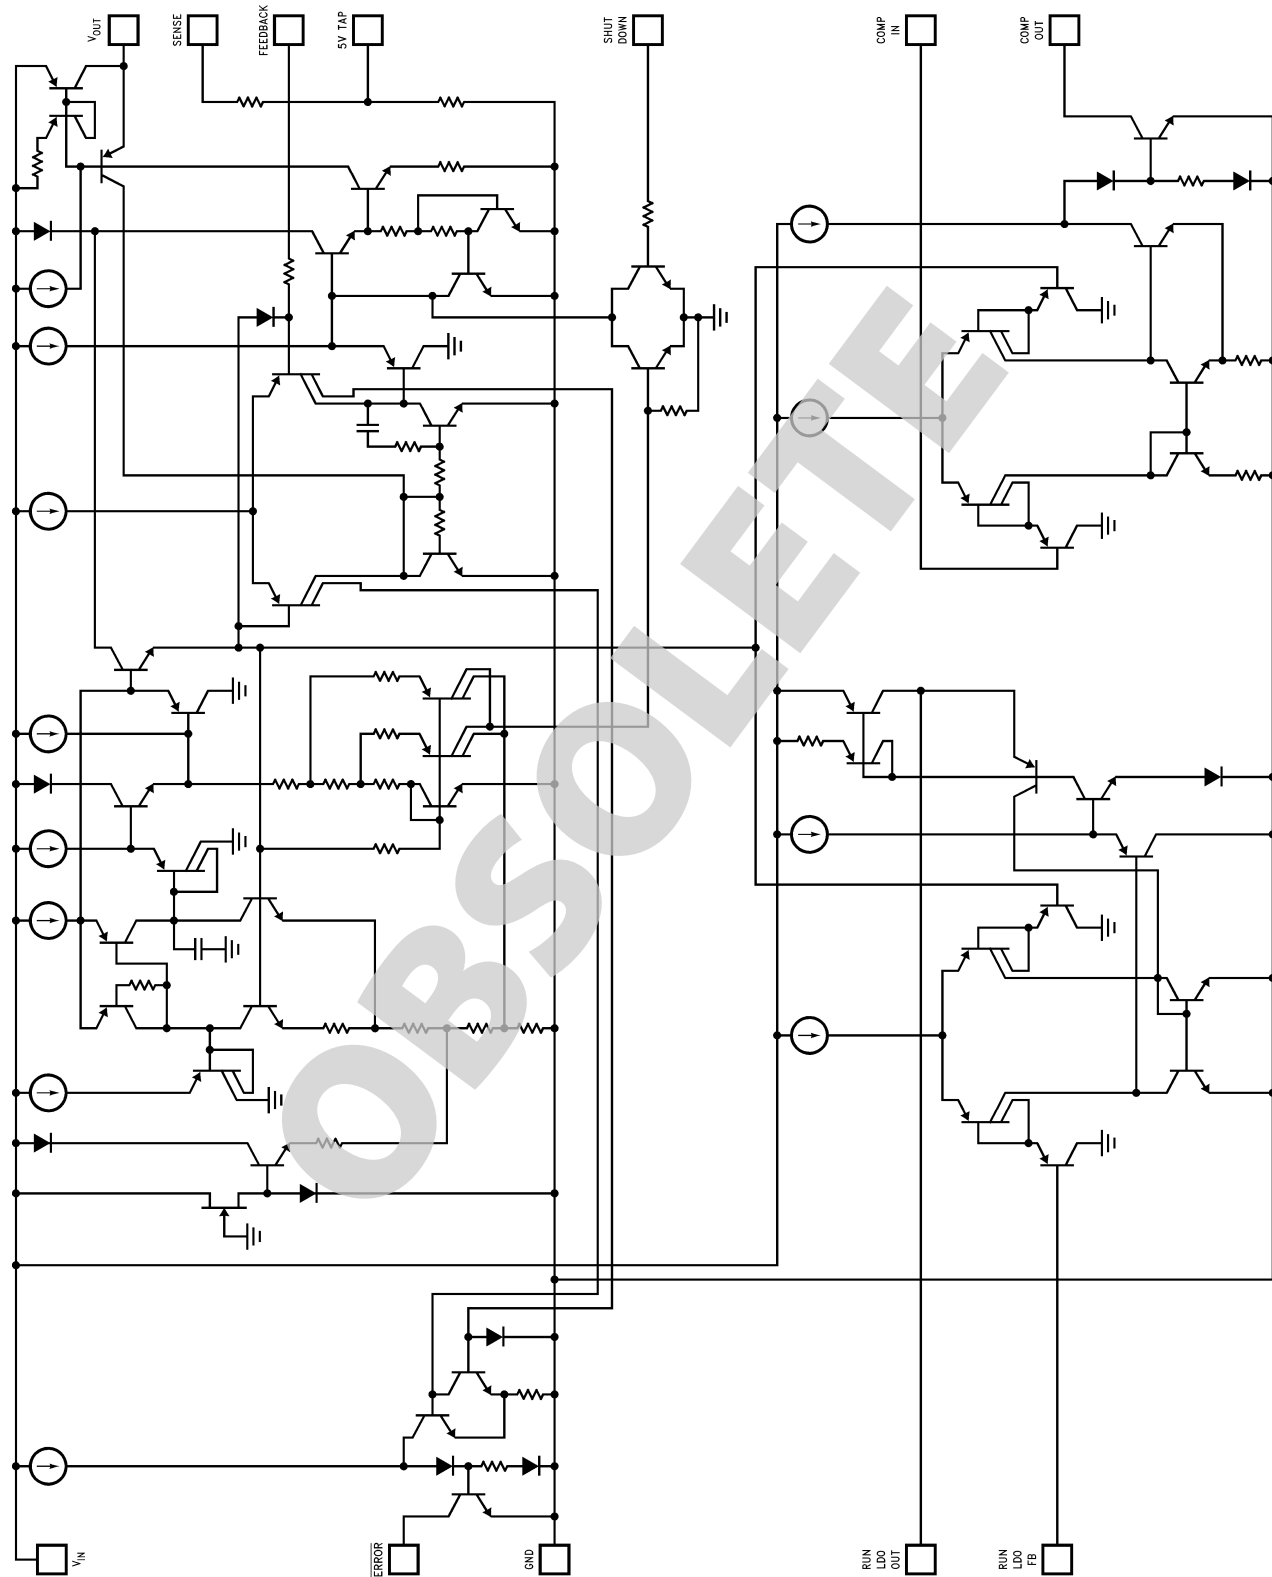


1133915






# Physical Dimensions inches (millimeters) unless otherwise noted

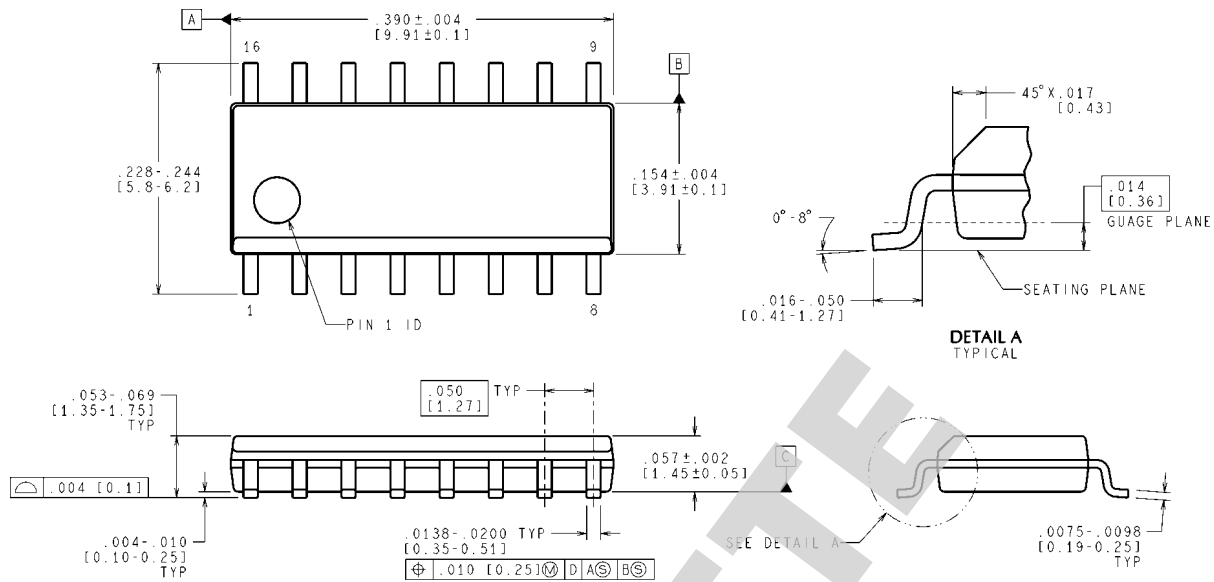


M16A (Rev J)

**16-Pin Surface Mount**  
Order Number LP2956IM or LP2956AIM  
NS Package Number M16A

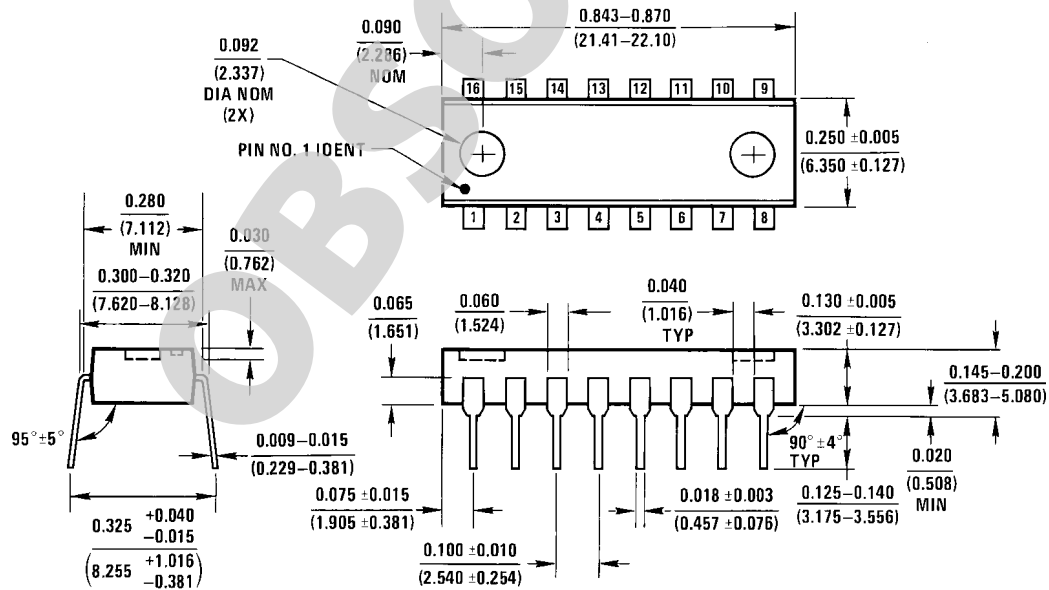

**16-Pin Plastic Dual-In-Line Package**  
Order Number LP2956IN or LP2956AIN  
NS Package Number N16A



OBSOLETE

## Notes

For more National Semiconductor product information and proven design tools, visit the following Web sites at:  
[www.national.com](http://www.national.com)

| Products                       |  | Design Support               |  |
|--------------------------------|--|------------------------------|--|
| Amplifiers                     | <a href="http://www.national.com/amplifiers">www.national.com/amplifiers</a>   | WEBENCH® Tools               | <a href="http://www.national.com/webench">www.national.com/webench</a>             |
| Audio                          | <a href="http://www.national.com/audio">www.national.com/audio</a>             | App Notes                    | <a href="http://www.national.com/appnotes">www.national.com/appnotes</a>           |
| Clock and Timing               | <a href="http://www.national.com/timing">www.national.com/timing</a>           | Reference Designs            | <a href="http://www.national.com/refdesigns">www.national.com/refdesigns</a>       |
| Data Converters                | <a href="http://www.national.com/adc">www.national.com/adc</a>                 | Samples                      | <a href="http://www.national.com/samples">www.national.com/samples</a>             |
| Interface                      | <a href="http://www.national.com/interface">www.national.com/interface</a>     | Eval Boards                  | <a href="http://www.national.com/evalboards">www.national.com/evalboards</a>       |
| LVDS                           | <a href="http://www.national.com/lvds">www.national.com/lvds</a>               | Packaging                    | <a href="http://www.national.com/packaging">www.national.com/packaging</a>         |
| Power Management               | <a href="http://www.national.com/power">www.national.com/power</a>             | Green Compliance             | <a href="http://www.national.com/quality/green">www.national.com/quality/green</a> |
| Switching Regulators           | <a href="http://www.national.com/switchers">www.national.com/switchers</a>     | Distributors                 | <a href="http://www.national.com/contacts">www.national.com/contacts</a>           |
| LDOs                           | <a href="http://www.national.com/lido">www.national.com/lido</a>               | Quality and Reliability      | <a href="http://www.national.com/quality">www.national.com/quality</a>             |
| LED Lighting                   | <a href="http://www.national.com/led">www.national.com/led</a>                 | Feedback/Support             | <a href="http://www.national.com/feedback">www.national.com/feedback</a>           |
| Voltage References             | <a href="http://www.national.com/vref">www.national.com/vref</a>               | Design Made Easy             | <a href="http://www.national.com/easy">www.national.com/easy</a>                   |
| PowerWise® Solutions           | <a href="http://www.national.com/powerwise">www.national.com/powerwise</a>     | Applications & Markets       | <a href="http://www.national.com/solutions">www.national.com/solutions</a>         |
| Serial Digital Interface (SDI) | <a href="http://www.national.com/sdi">www.national.com/sdi</a>                 | Mil/Aero                     | <a href="http://www.national.com/milaero">www.national.com/milaero</a>             |
| Temperature Sensors            | <a href="http://www.national.com/tempsensors">www.national.com/tempsensors</a> | SolarMagic™                  | <a href="http://www.national.com/solarmagic">www.national.com/solarmagic</a>       |
| PLL/VCO                        | <a href="http://www.national.com/wireless">www.national.com/wireless</a>       | PowerWise® Design University | <a href="http://www.national.com/training">www.national.com/training</a>           |

THE CONTENTS OF THIS DOCUMENT ARE PROVIDED IN CONNECTION WITH NATIONAL SEMICONDUCTOR CORPORATION ("NATIONAL") PRODUCTS. NATIONAL MAKES NO REPRESENTATIONS OR WARRANTIES WITH RESPECT TO THE ACCURACY OR COMPLETENESS OF THE CONTENTS OF THIS PUBLICATION AND RESERVES THE RIGHT TO MAKE CHANGES TO SPECIFICATIONS AND PRODUCT DESCRIPTIONS AT ANY TIME WITHOUT NOTICE. NO LICENSE, WHETHER EXPRESS, IMPLIED, ARISING BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT.

TESTING AND OTHER QUALITY CONTROLS ARE USED TO THE EXTENT NATIONAL DEEMS NECESSARY TO SUPPORT NATIONAL'S PRODUCT WARRANTY. EXCEPT WHERE MANDATED BY GOVERNMENT REQUIREMENTS, TESTING OF ALL PARAMETERS OF EACH PRODUCT IS NOT NECESSARILY PERFORMED. NATIONAL ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR BUYER PRODUCT DESIGN. BUYERS ARE RESPONSIBLE FOR THEIR PRODUCTS AND APPLICATIONS USING NATIONAL COMPONENTS. PRIOR TO USING OR DISTRIBUTING ANY PRODUCTS THAT INCLUDE NATIONAL COMPONENTS, BUYERS SHOULD PROVIDE ADEQUATE DESIGN, TESTING AND OPERATING SAFEGUARDS.

EXCEPT AS PROVIDED IN NATIONAL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, NATIONAL ASSUMES NO LIABILITY WHATSOEVER, AND NATIONAL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY RELATING TO THE SALE AND/OR USE OF NATIONAL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

### LIFE SUPPORT POLICY


**NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION.** As used herein:

Life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness.

National Semiconductor and the National Semiconductor logo are registered trademarks of National Semiconductor Corporation. All other brand or product names may be trademarks or registered trademarks of their respective holders.

Copyright© 2009 National Semiconductor Corporation

For the most current product information visit us at [www.national.com](http://www.national.com)

  
**National Semiconductor**  
**Americas Technical**  
**Support Center**  
 Email: [support@nsc.com](mailto:support@nsc.com)  
 Tel: 1-800-272-9959

**National Semiconductor Europe**  
**Technical Support Center**  
 Email: [europe.support@nsc.com](mailto:europe.support@nsc.com)

**National Semiconductor Asia**  
**Pacific Technical Support Center**  
 Email: [ap.support@nsc.com](mailto:ap.support@nsc.com)

**National Semiconductor Japan**  
**Technical Support Center**  
 Email: [jpn.feedback@nsc.com](mailto:jpn.feedback@nsc.com)