


| DATE    | SYM | REVISION RECORD | AUTH. | DR. | CK. |
|---------|-----|-----------------|-------|-----|-----|
| 1/25/99 | -   | ISSUED          |       | NT  | DG  |
|         |     |                 |       |     |     |
|         |     |                 |       |     |     |
|         |     |                 |       |     |     |

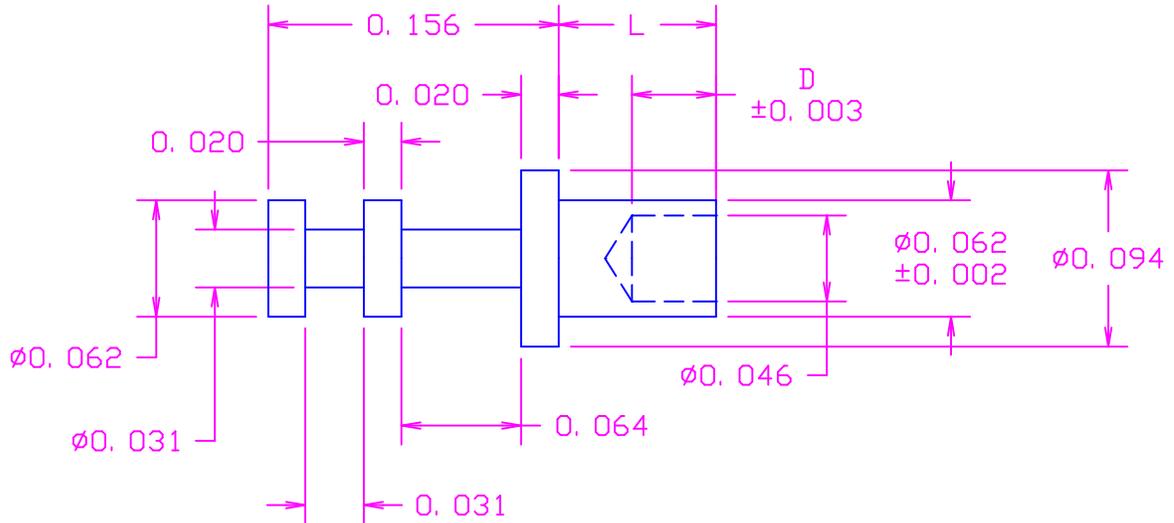

RECOMMENDED MOUNTING HOLE .067 DIA. (#51 DRILL)

MATERIAL: BRASS PER ASTM B16,

ALLOY C 36000, 1/2 HARD

FINISH: .0003"MIN. SILVER PER QQ-S-365,

TYPE II, GRADE A WITH NON-CHROMATE PRESERVATIVE

| PART NUMBER | L    | D    | T    |
|-------------|------|------|------|
| 10-214-11   | .037 | .025 | 1/64 |
| 10-214-1    | .053 | .045 | 1/32 |
| 10-214-2    | .084 | .045 | 1/16 |
| 10-214-3    | .115 | .045 | 3/32 |
| 10-214-4    | .147 | .045 | 1/8  |

ACTUAL SIZE



|                                 |                                 |                               |  |
|---------------------------------|---------------------------------|-------------------------------|--|
| TOLERANCES<br>(EXCEPT AS NOTED) | CONCORD ELECTRONICS CORPORATION |                               |  |
| DECIMAL<br>± .005               | P/N                             | SCALE                         | 30 GREAT JONES ST.<br>NEW YORK N. Y. 10012 |
| FRACTIONAL<br>± 1/64            | TITLE<br>TERMINAL               |                               |  |
| ANGULAR<br>±                    | DATE<br>10-30-96                | DRAWING NUMBER<br>10-214-X-01 |  |