



BNC END LAUNCH BULKHEAD JACK


10-462-1-D36-1.6

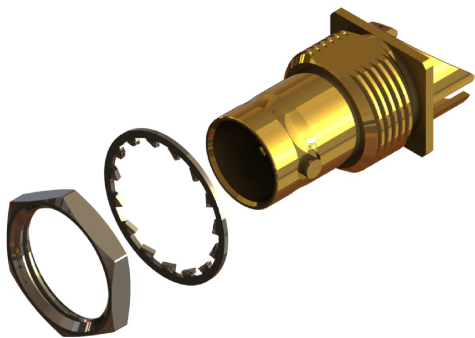


images for illustration purposes only

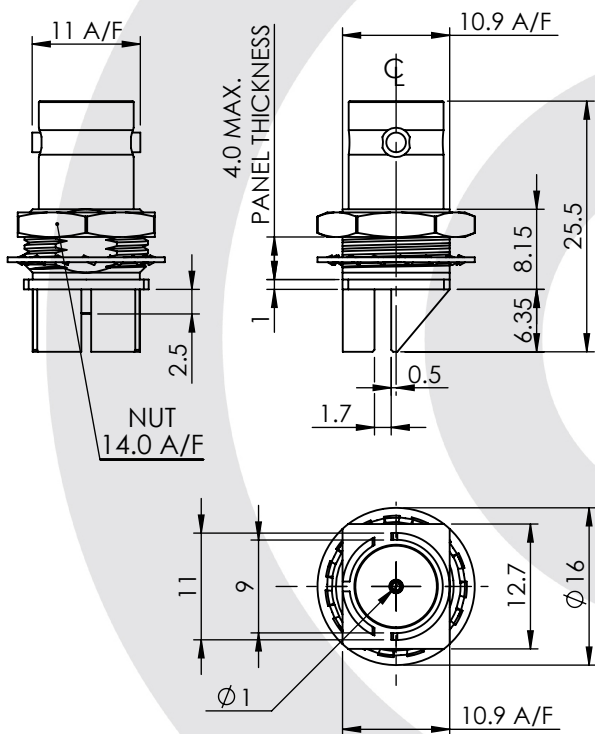

Recommended Mounting Hole

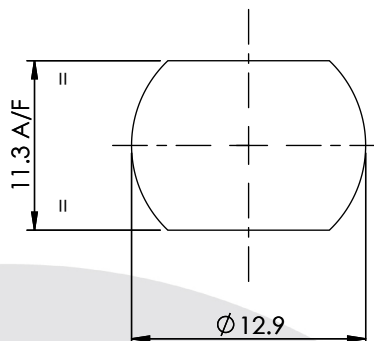

Recommended PCB Layout

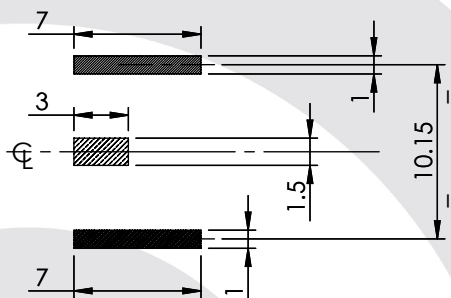

Environmental Specification

Operating Temp: -55 to +155 Deg C.
IP Rating (Mated): IP 54

Electrical Specification


Impedance: 75 Ohm
Frequency: 0-6 GHz
Dielectric W/V: 1500 Veff
Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 27 N min
Cable Retention: N/A N min
Mating cycles: 500
Weight: 12.33 g

Connector Interface


image for illustration purposes only



Performance

-34.95dB @ 1.0 GHz
-32.49dB @ 3.0 GHz
-28.34dB @ 4.5 GHz
-19.91dB @ 6.0 GHz

Return Loss Graph

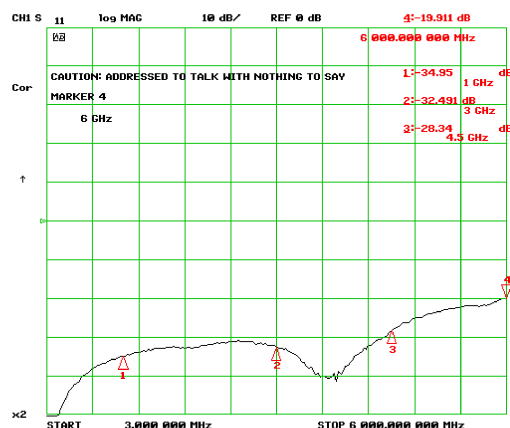

5	WASHER	SK5	NICKEL
4	NUT	BRASS	NICKEL
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	PHOSPHOR BRONZE	GOLD
1	BODY	BRASS	GOLD

ITEM	DESCRIPTION	MATERIAL	PLATING
A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES	
REVISION :	A01	NAME	SIGNATURE
ISSUE :	4	DATE	
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR		DATE	



RoHS

2002/95/EC

DRAWN

CHK'D

APPV'D

THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.