

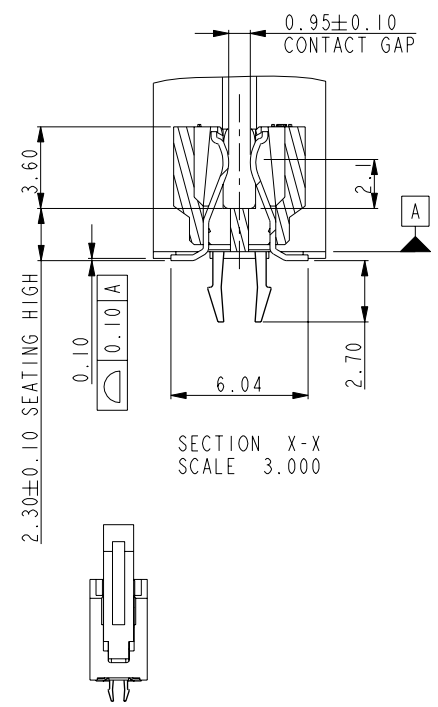


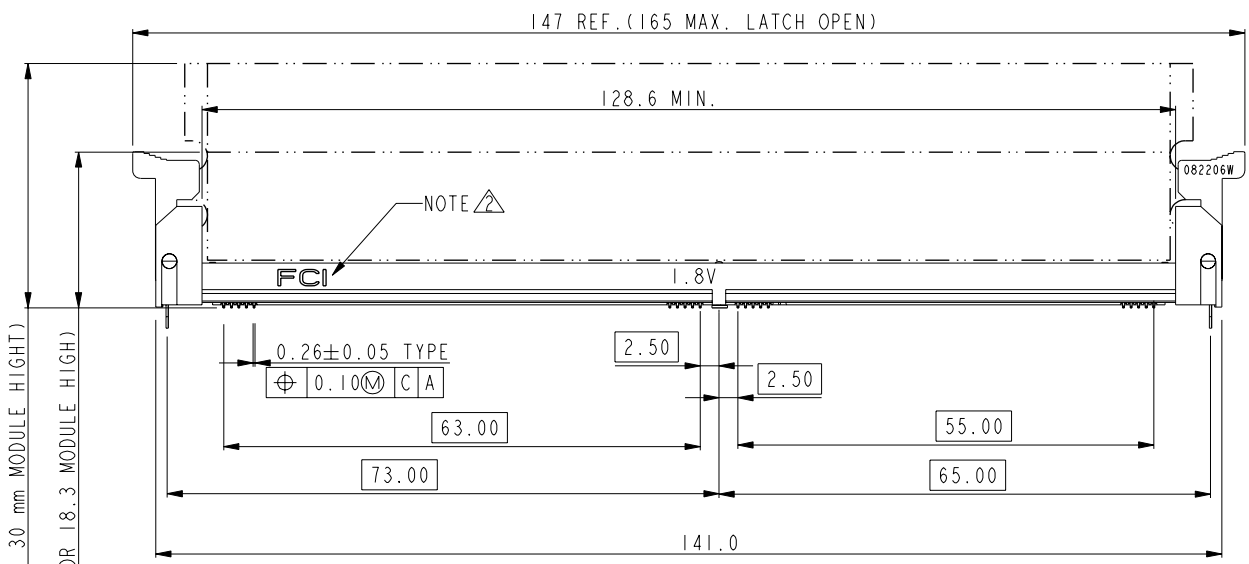

Copyright FCI.

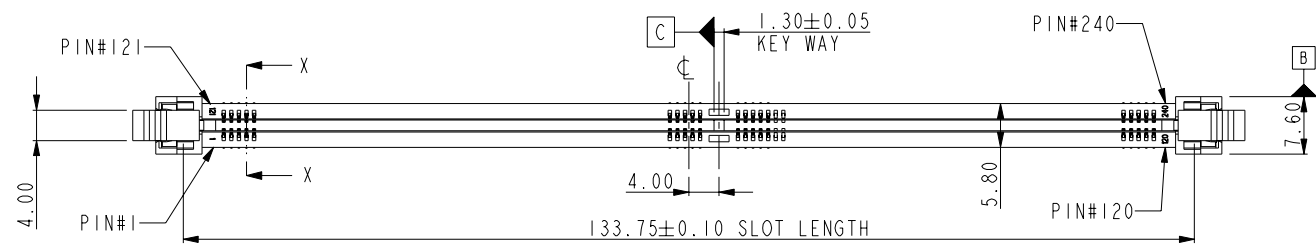

SCALE 1.000




rev	ecn no	dr	date
A	DG07-0385	CS	09/04/07
B	DG08-0248	BL	09/10/08
C	DG09-0040	BL	02/19/09
D	DG09-0094	BL	03/26/09
E	N10-0076	R.B	2010-04-30

www.fciconnect.com			surface - ✓		tolerance std		projection 		MM 	
			TOLERANCES UNLESS OTHERWISE SPECIFIED							
Dr	MAGGIE WU	07/14/06	ANGULAR	LINEAR	0. xxx	±0.15	size A4	Scale		
Eng	GARY HSIEH	07/14/06			0. xx	±0.30		0.707		
Chr	PAUL WANG	07/14/06			0. x	±0.5		ECN N10-0076		
Appr	JOSEPH HSIA	07/14/06	Product family -				Spec ref *			
	title SMT TYPE DDR II ASS'Y				dwg no	10070983			Rev. E	
	DDR II 240P									
	catalog no -									
				CUSTOMER			sheet 1 of 4			


REV F - 2006-04-17



Copyright FCI.

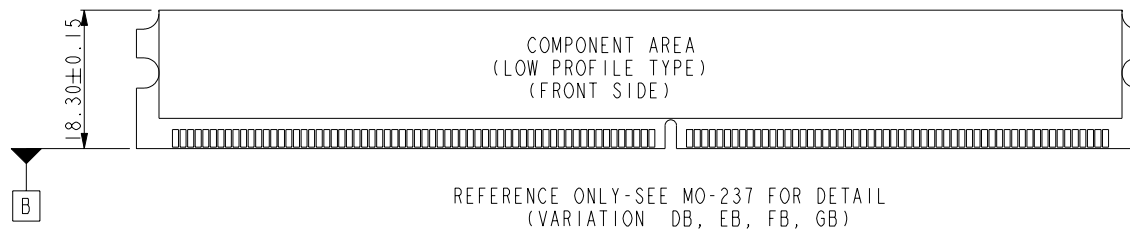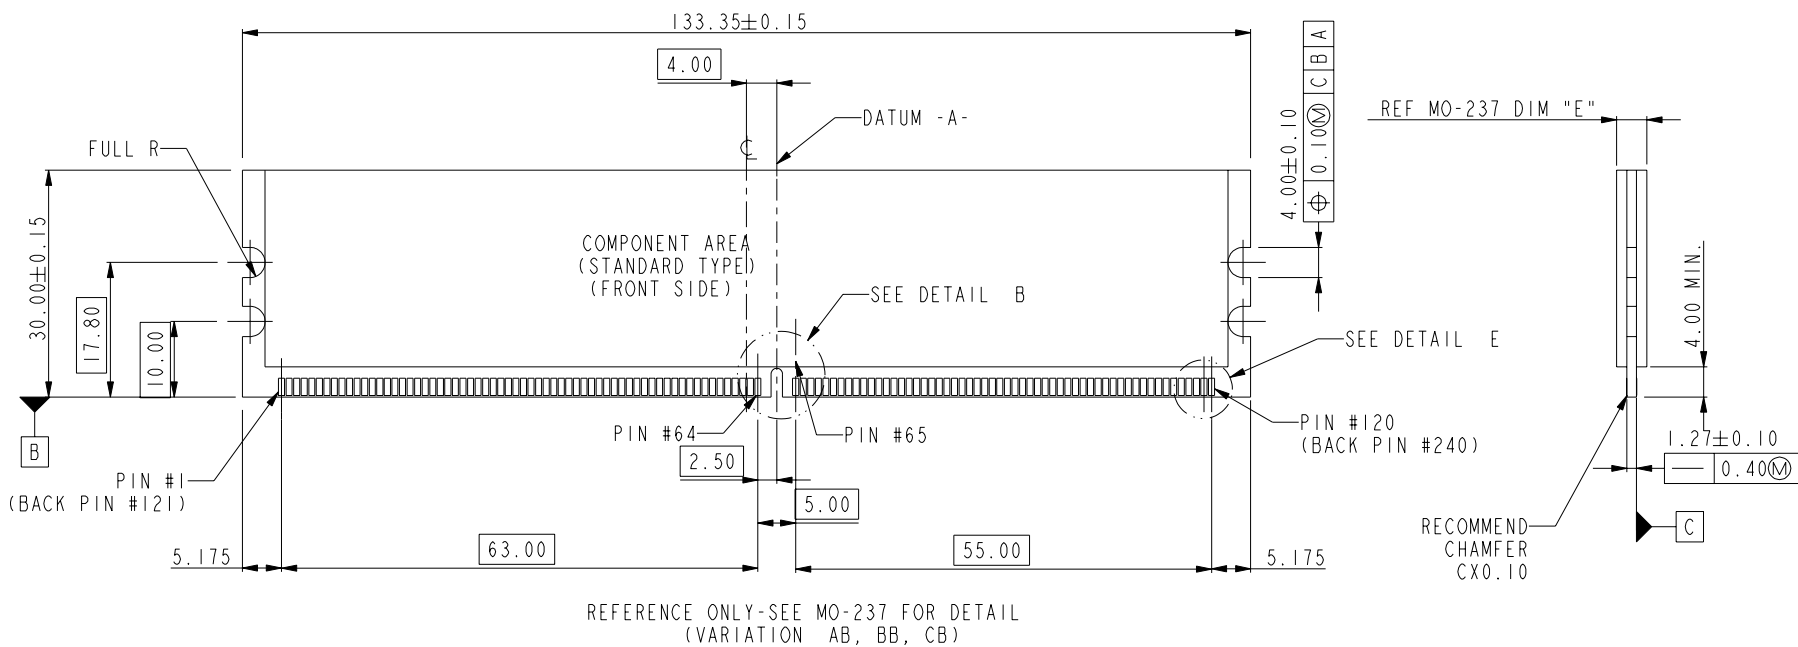

DETAIL B
SCALE 2.000

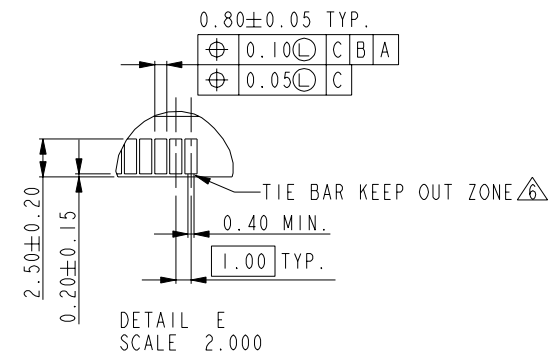

DETAIL E
SCALE 2.000



title SMT TYPE DDR II ASS'Y
DDR II 240P
catalog no -





dwg no 10070983

Rev. E

CUSTOMER sheet 2 of 4



Copyright FCI.

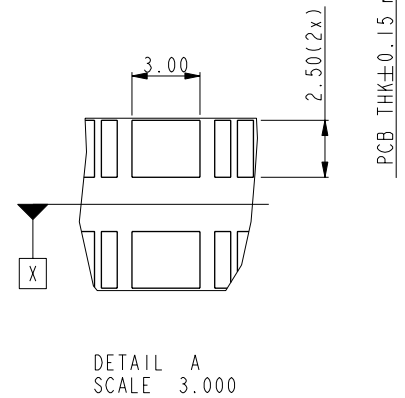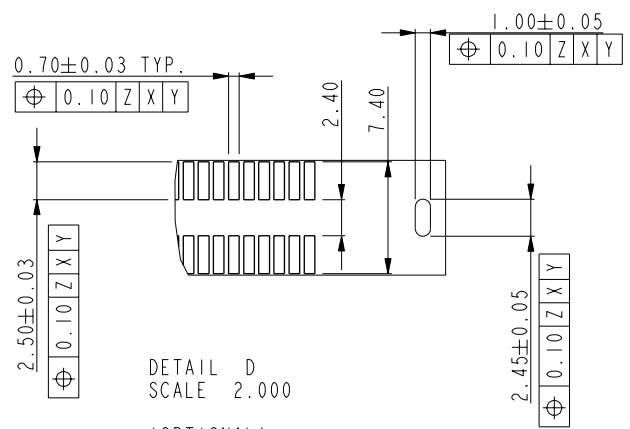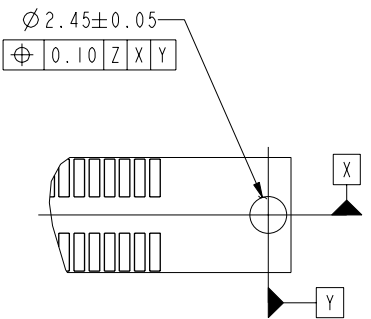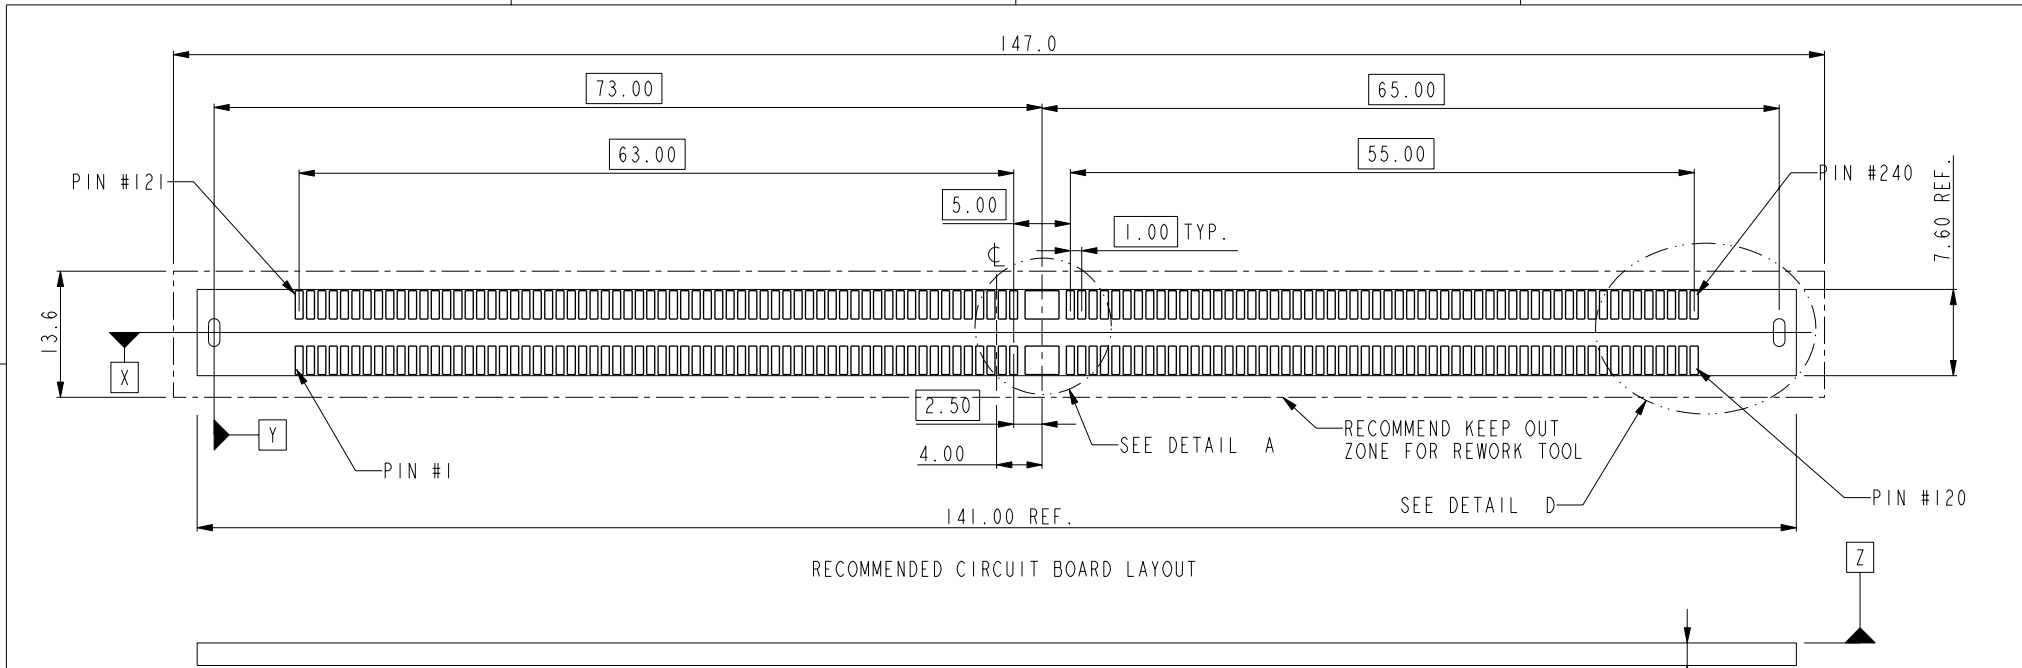

	title	SMT TYPE DDR II ASS'Y	dwg no	10070983	Rev.	E
		DDR II 240P				
	catalog no	-	CUSTOMER	sheet 3 of 4		



Copyright FCI.

10070983 - □ □ □ □

STYLE : MECHANICAL KEYING

1 : 1.8 VOLT. W/ CENTER KEY

HOLD DOWN TYPE

0 : CENTER HOLD DOWN, FORK LOCK
AT BOTH END

RESERVED

0

PLATING

CODE	CONTACT	SOLDERTAIL	UNDERPLATE
1LF	10u" (0.25um) MIN. GOLD	100u" (2.54um) MIN. 100% MATT TIN	50u" (1.27um) MIN. NICKEL OVERALL
2LF	15u" (0.38um) MIN. GOLD		
3LF	30u" (0.76um) MIN. GOLD		
4LF	GOLD FLASH		

COLOR OF HOUSING AND EJECTOR

0 : BLACK HOUSING + IVORY EJECTOR

NOTES:

- MATERIAL:
HOUSING: HIGH PERFORMANCE RESINS, GLASS FILLED UL94V-0 RATED.
EJECTOR: HIGH PERFORMANCE RESINS, GLASS FILLED UL94V-0 RATED.
TERMINAL: HIGH PERFORMANCE COPPER ALLOY
METAL CLIP: COPPER ALLOY.
FCI LOGO TO BE APPROXIMATELY LOCATED AS SHOWN ON PRINT.
- PRODUCT SPECIFICATION: GS-12-481.
- PACKAGING SPECIFICATION: GS-14-899.
- RECOMMENDED STENCIL THICKNESS NO LESS THAN 0.15 mm.
- FOR OPTIMUM PERFORMANCE, THE TIE BAR IS TO BE ON AN INTERNAL LAYER SO THAT THE REMNANT CANNOT CAUSE CONTACT DAMAGE.
- THE DATE CODE IS SHOWN "MM-DD-YY-W". "W" MEANS PRODUCTION LINE.
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- THE HOUSING WILL WITH STAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN AN IR REFLOW SOLDERING APPLICATION.



title SMT TYPE DDR II ASS'Y
DDR II 240P
catalog no -

dwg no 10070983

Rev.
E

CUSTOMER sheet 4 of 4