


Tous droits strictement réservés. Reproduction ou communication à des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Property of FCJ. Droits de reproduction FCJ.



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCJ. Copyright FCJ.

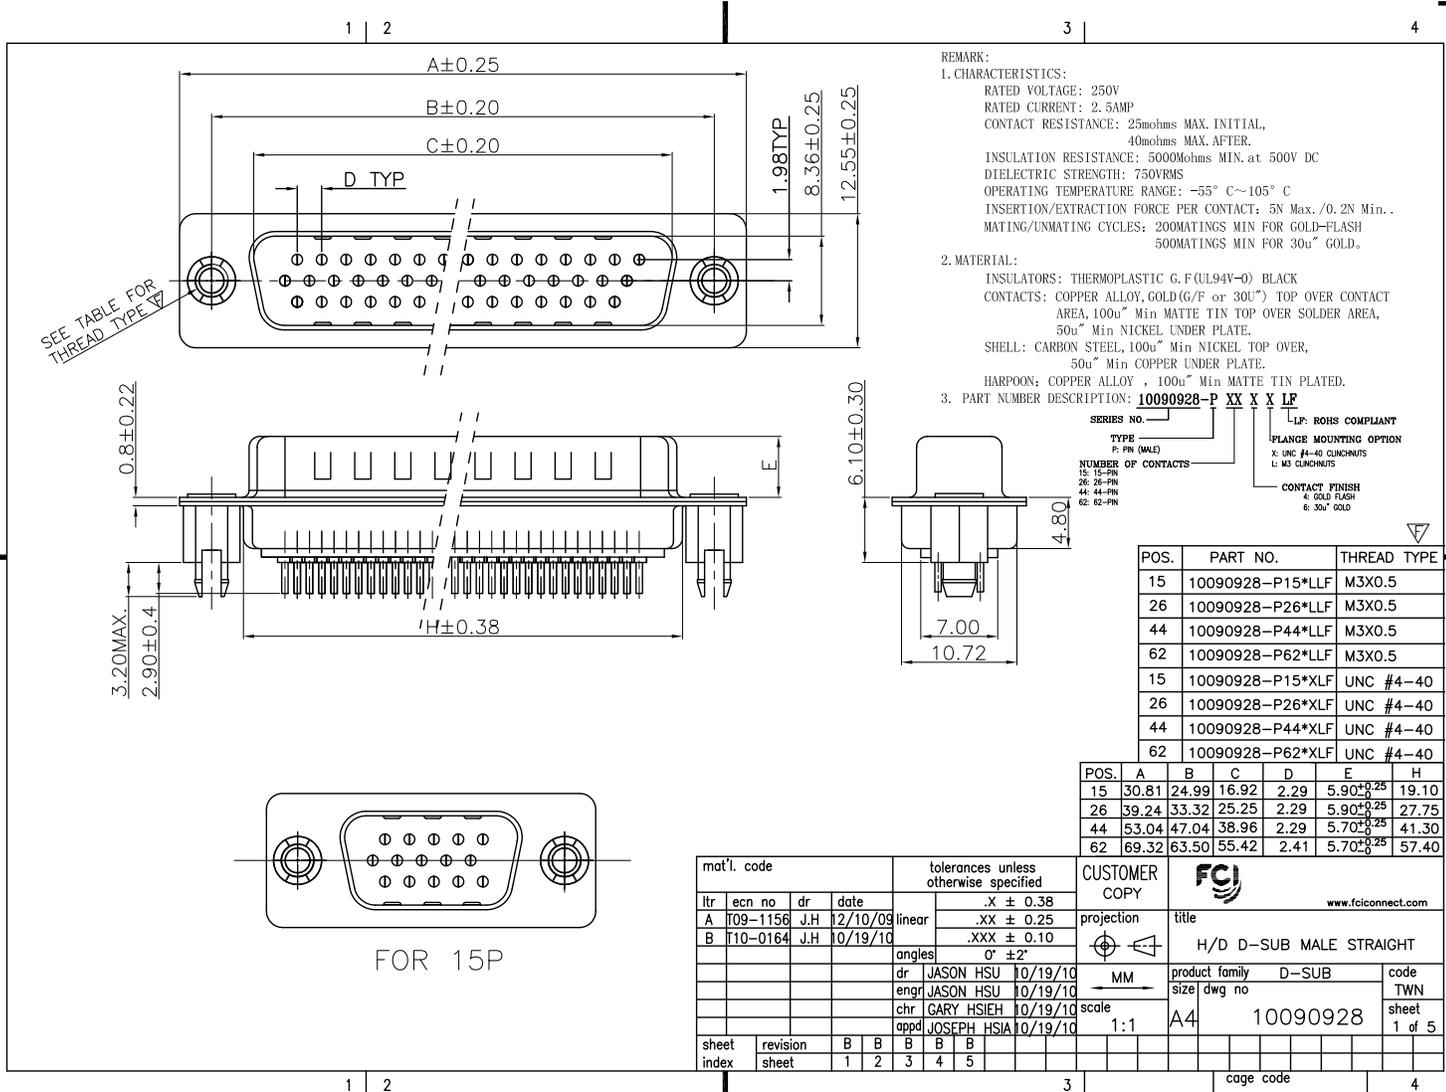

REMARK:
 1. CHARACTERISTICS:
 RATED VOLTAGE: 250V
 RATED CURRENT: 2.5AMP
 CONTACT RESISTANCE: 25mohms MAX. INITIAL, 40mohms MAX. AFTER.
 INSULATION RESISTANCE: 5000Mohms MIN. at 500V DC
 DIELECTRIC STRENGTH: 750VRMS
 OPERATING TEMPERATURE RANGE: -55° C~105° C
 INSERTION/EXTRACTION FORCE PER CONTACT: 5N Max./0.2N Min.
 MATING/UNMATING CYCLES: 200MATINGS MIN FOR GOLD-FLASH 500MATINGS MIN FOR 30u" GOLD.
 2. MATERIAL:
 INSULATORS: THERMOPLASTIC G.F(UL94V-0) BLACK
 CONTACTS: COPPER ALLOY, GOLD(G/F or 30u") TOP OVER CONTACT AREA, 100u" Min MATTE TIN TOP OVER SOLDER AREA, 50u" Min NICKEL UNDER PLATE.
 SHELL: CARBON STEEL, 100u" Min NICKEL TOP OVER, 50u" Min COPPER UNDER PLATE.
 HARPOON: COPPER ALLOY, 100u" Min MATTE TIN PLATED.
 3. PART NUMBER DESCRIPTION: **10090928-P XX X X LF**

SERIES NO. LP: ROHS COMPLIANT
 TYPE P: FN (MALE)
 NUMBER OF CONTACTS X: UNC #4-40 CLINCHMUT L: M3 CLINCHMUT
 CONTACT FINISH 4: GOLD FLASH 5: 30u" GOLD

POS.	PART NO.	THREAD TYPE
15	10090928-P15*LLF	M3X0.5
26	10090928-P26*LLF	M3X0.5
44	10090928-P44*LLF	M3X0.5
62	10090928-P62*LLF	M3X0.5
15	10090928-P15*XLF	UNC #4-40
26	10090928-P26*XLF	UNC #4-40
44	10090928-P44*XLF	UNC #4-40
62	10090928-P62*XLF	UNC #4-40

POS.	A	B	C	D	E	H
15	30.81	24.99	16.92	2.29	5.90 ^{+0.25}	19.10
26	39.24	33.32	25.25	2.29	5.90 ^{+0.25}	27.75
44	53.04	47.04	38.96	2.29	5.70 ^{+0.25}	41.30
62	69.32	63.50	55.42	2.41	5.70 ^{+0.25}	57.40


mat'l. code				tolerances unless otherwise specified			
lfr	ecn no	dr	date	linear	.X ± 0.38	projection	
A	T09-1156	J.H	12/10/09		.XX ± 0.25		
B	T10-0164	J.H	10/19/10	angles	.XXX ± 0.10		
				dr	0° ±2°		
				enrg	JASON HSU 10/19/10	MM	
				chr	JASON HSU 10/19/10	scale	
				appd	GARY HSIEH 10/19/10	1:1	
					JOSEPH HSIA 10/19/10		
sheet index	revision sheet	B	B	B	B	B	B
		1	2	3	4	5	

CUSTOMER COPY		FCJ	
title	H/D D-SUB MALE STRAIGHT	product family	D-SUB
size	A4	dwg no	10090928
code		code	TWN
		sheet	1 of 5

Tous droits strictement réservés. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriété de c. FCI. Droits de reproduction FCI.



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

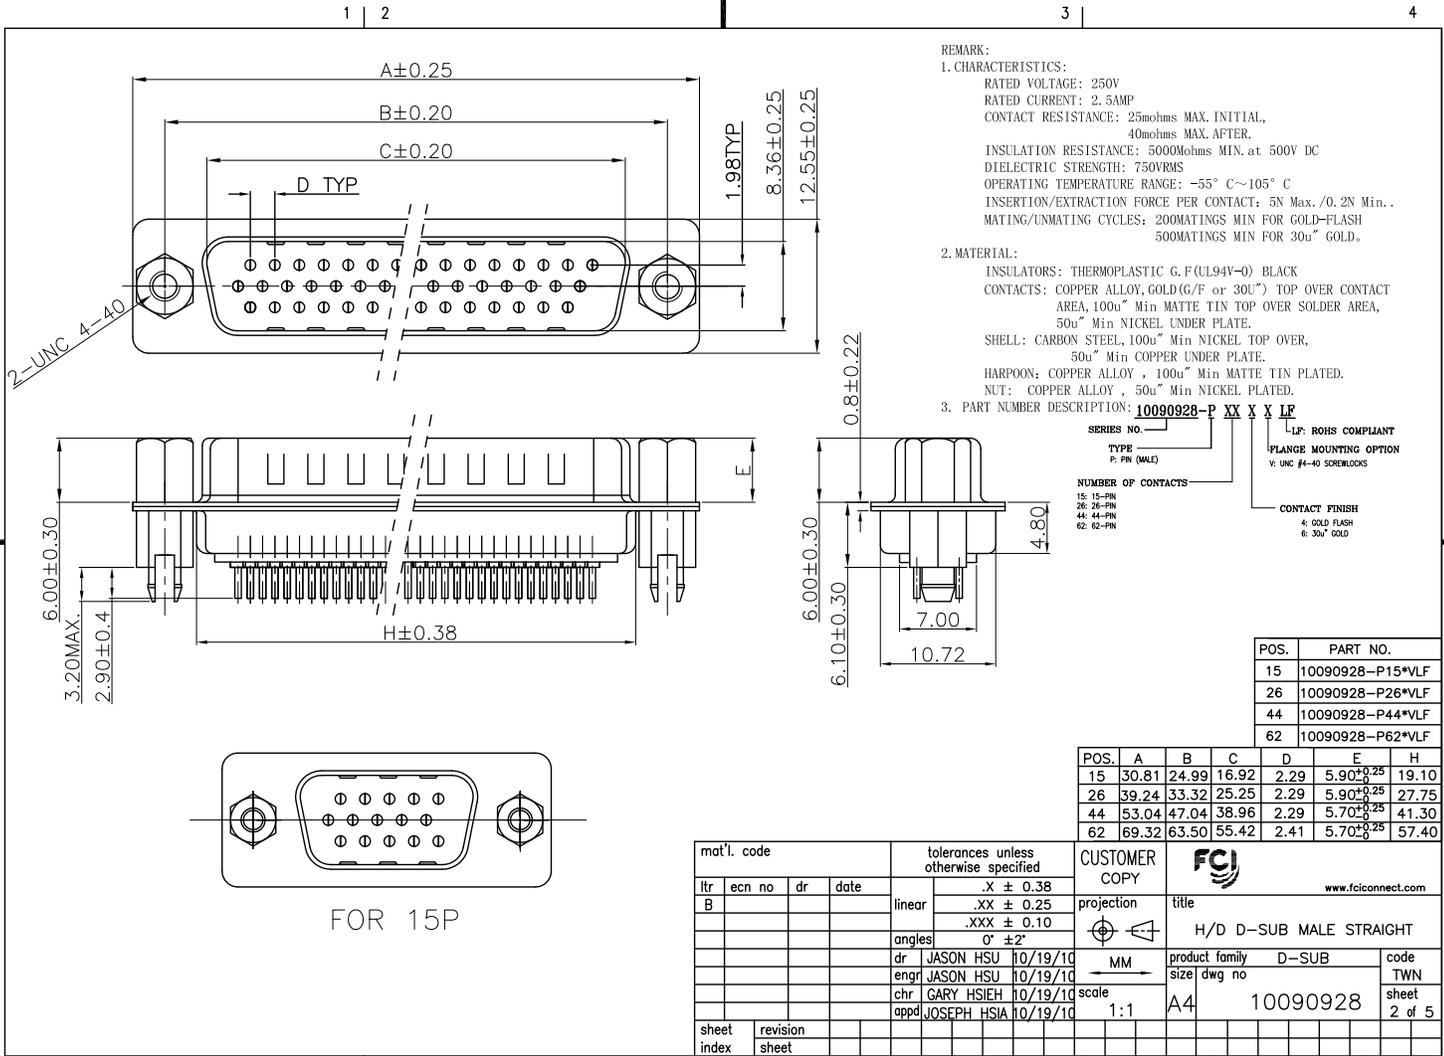

REMARK:
 1. CHARACTERISTICS:
 RATED VOLTAGE: 250V
 RATED CURRENT: 2.5AMP
 CONTACT RESISTANCE: 25mohms MAX. INITIAL, 40mohms MAX. AFTER.
 INSULATION RESISTANCE: 5000mohms MIN. at 500V DC
 DIELECTRIC STRENGTH: 750VRMS
 OPERATING TEMPERATURE RANGE: -55° C~105° C
 INSERTION/EXTRACTION FORCE PER CONTACT: 5N Max./0.2N Min.
 MATING/UNMATING CYCLES: 200MATINGS MIN FOR GOLD-FLASH 500MATINGS MIN FOR 30u" GOLD.
 2. MATERIAL:
 INSULATORS: THERMOPLASTIC G.F.(UL94V-0) BLACK
 CONTACTS: COPPER ALLOY, GOLD(G/F or 30u") TOP OVER CONTACT AREA, 100u" Min MATTE TIN TOP OVER SOLDER AREA, 50u" Min NICKEL UNDER PLATE.
 SHELL: CARBON STEEL, 100u" Min NICKEL TOP OVER, 50u" Min COPPER UNDER PLATE.
 HARPOON: COPPER ALLOY, 100u" Min MATTE TIN PLATED.
 NUT: COPPER ALLOY, 50u" Min NICKEL PLATED.
 3. PART NUMBER DESCRIPTION: **10090928-P XX X X LF**

SERIES NO. _____
 TYPE _____
 P: FN (MALE)
 NUMBER OF CONTACTS _____
 15: 15-PN
 26: 26-PN
 44: 44-PN
 62: 62-PN
 L.P. ROHS COMPLIANT
 FLANGE MOUNTING OPTION
 V: UNC #1-40 SOLDERLOCKS
 CONTACT FINISH
 4: GOLD FLASH
 8: 30u" GOLD

POS.	PART NO.					
15	10090928-P15*VLF					
26	10090928-P26*VLF					
44	10090928-P44*VLF					
62	10090928-P62*VLF					


POS.	A	B	C	D	E	H
15	30.81	24.99	16.92	2.29	5.90 ^{+0.25}	19.10
26	39.24	33.32	25.25	2.29	5.90 ^{+0.25}	27.75
44	53.04	47.04	38.96	2.29	5.70 ^{+0.25}	41.30
62	69.32	63.50	55.42	2.41	5.70 ^{+0.25}	57.40

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		FCI		www.fciconnect.com	
ltr	ecn no	dr	date	linear	.X ± 0.38	projection	title				
B					.XX ± 0.25		H/D D-SUB MALE STRAIGHT				
				angles	.XXX ± 0.10		product family	D-SUB		code	
				dr	0° ±2'	MM	size		TWN		
				enrg	JASON HSU 10/19/10	scale	dwg no		sheet		
				chr	JASON HSU 10/19/10	1:1	10090928		2 of 5		
				appd	JOSEPH HSIA 10/19/10						
sheet index	revision sheet										


Tous droits strictement réservés. Reproduction ou communication à des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriété de c. FCI. Droits de reproduction FCI.




All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

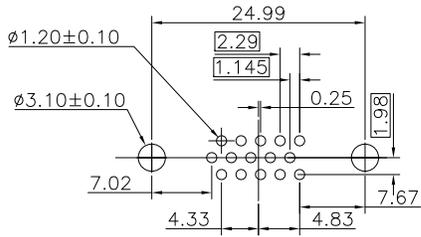


P.C.B LAYOUT(FOR 15P)

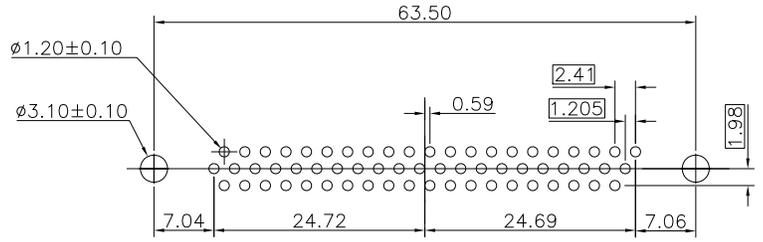

P.C.B LAYOUT(FOR 62P)

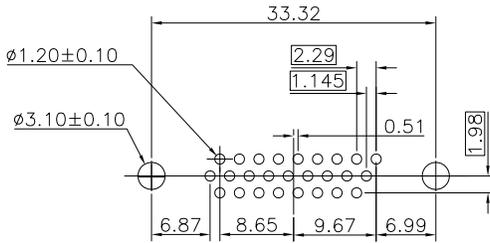

P.C.B LAYOUT(FOR 26P)

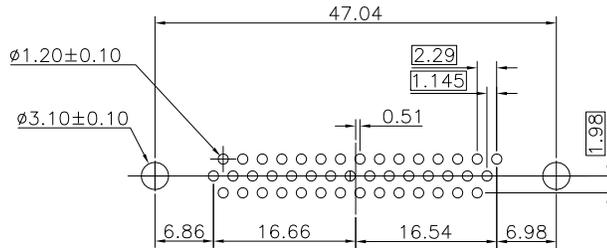

P.C.B LAYOUT(FOR 44P)

mat'l. code				tolerances unless otherwise specified			CUSTOMER COPY		FCI		www.fciconnect.com	
ltr	ecn no	dr	date	linear	.X ± 0.38		projection	title				
B					.XX ± 0.25			H/D D-SUB MALE STRAIGHT PCB				
					.XXX ± 0.10			product family D-SUB				
				angles	0° ±2°		MM	size		code		
				dr	JASON HSU	10/19/10		A4		10090928		TWN
				enrg	JASON HSU	10/19/10		1:1				sheet
				chr	GARY HSIEH	10/19/10					3 of 5	
				appd	JOSEPH HSIA	10/19/10					sheet	
sheet index	revision sheet											

ACAD

PDM: Rev:B

STATUS:Released

Printed: Nov 02, 2010

