

PRODUCT NUMBER

10119678-3XX LF

INDICATES THE PRODUCT IS ROHS
COMPATIBLE, NOTE 4

PACKAGING NOTE 3

POS	DIM"A"	DIM"B"	DIM"C"	DIM"Z"
24	58.42	60.96	53.34	0.15
30	73.66	76.20	68.58	0.20
35	86.36	88.82	81.28	0.20

PLATING

0.76µm GOLD ON CONTACT AREA

2.0µm MATTE TIN ON TAILS.

NOTES:

1 - HOUSING MAT'L: HIGH TEMPERATURE PLASTIC
FLAME RETARDANT PER UL 94 V-O COLOR: GREY.

2 - TERMINAL MATERIAL: PHOSPHOR BRONZE.

3 - PACKAGING:

OMMIT DIGIT = TUBE

A = TAPE AND REEL

FOR 24 POS: PACKSIZE OF 550 PCS PER REEL.

FOR 30 POS: PACKSIZE OF 680 PCS PER REEL.

4 - RoHS COMPATIBLE PRODUCT SPECIFICATIONS

a - PLATING:

- "LF" MEANS THE PRODUCT IS LEAD-FREE,
2µm MINIMUM MATTE TIN OVER 1.27µm
MINIMUM NICKEL UNDERPLATE.


b - MANUFACTURING PROCESS COMPATIBILITY

- THE HOUSING WILL WITHSTAND EXPOSURE TO
260°C PEAK TEMPERATURE FOR 30 SECONDS
MAX IN A CONVECTION, INFRA-RED OR VAPOR
PHASE OR REFLOW OVEN.

c - LABELING:



- MEETS PACKAGING SPECS AS PER GS-14-920

d - LEGAL STATEMENT: SEE GS-47-0004

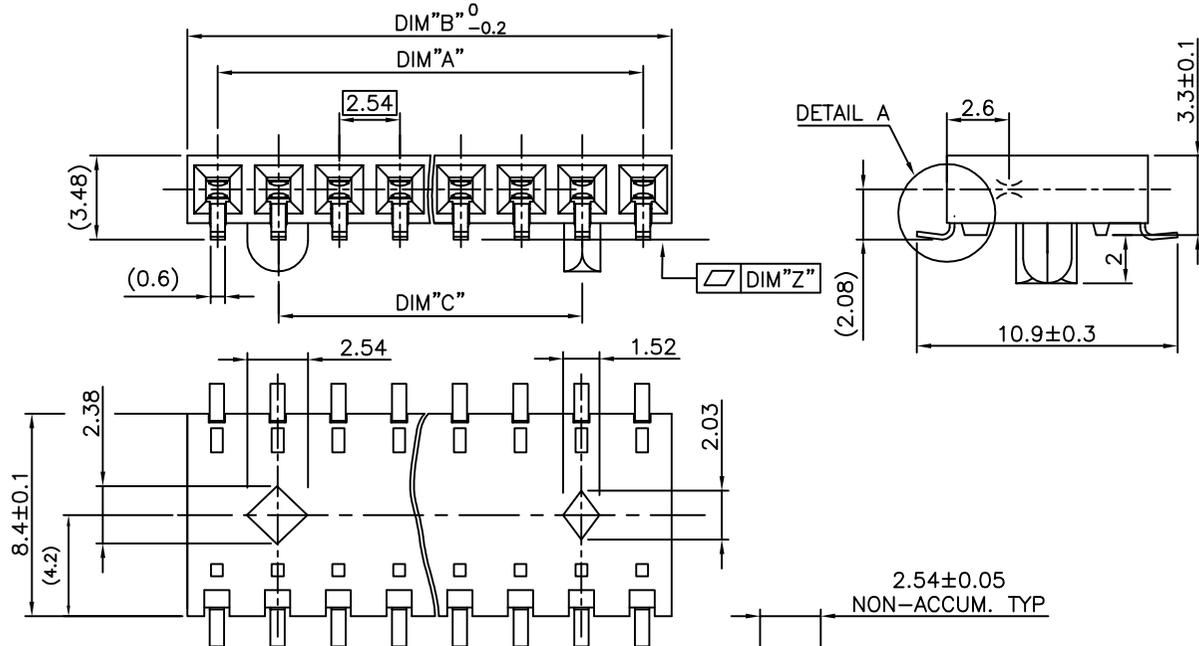

MATING SIDE

DETAIL A
SCALE 20:1

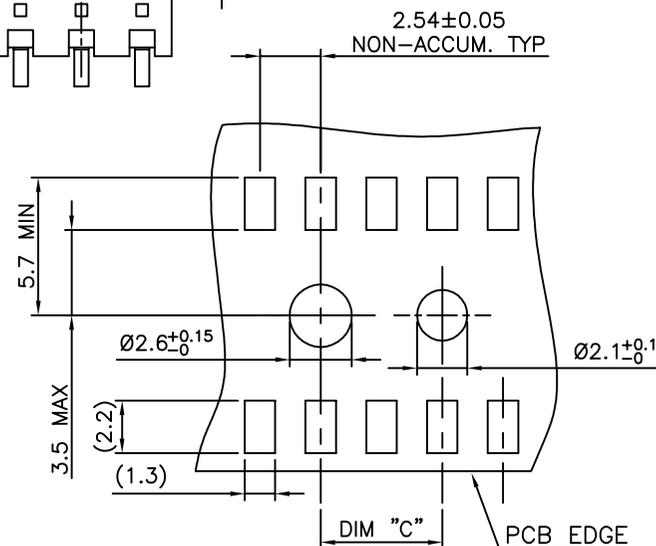

mat'l. code		surface		tolerance		projection		product family	
NOTE 1		ISO 1302		ISO 406 ISO 1101		mm		DUBOX	
ltr	ecn no	dr	date	tolerances unless otherwise specified		mm		title	
A	F12-0040	LMU	12.04.02	angles	linear	.x ±0.3	BtB RECEPT. HORIZ SR SMT		
B	B-15987	JCO	13.10.02			.xx ±0.13	scale 10:1		
C	F-24485	AMA	16.07.12	±2'		.xxx ±0.05	dwg no 10119678 sheet 1 of 1 size A3		
D	F-24995	DDE	16.09.21	dr	LMULIN	12.01.03	type CUSTOMER Drawing		
E	F-25000	DDE	16.09.21	enrg	J COMPAGNON	12.01.04			
				chr	JCO	12.01.03			
				appd	J.PE	12.01.04			
sheet index	revision sheet								



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[10119678-324ALF](#)