

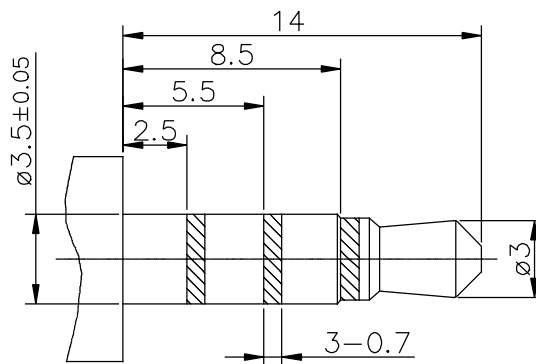
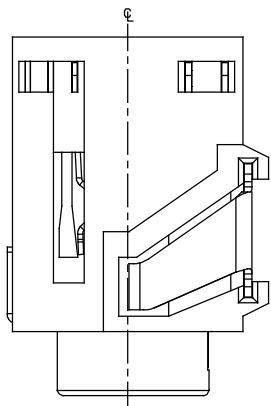


PRODUCT NUMBER

10123764-001XLF

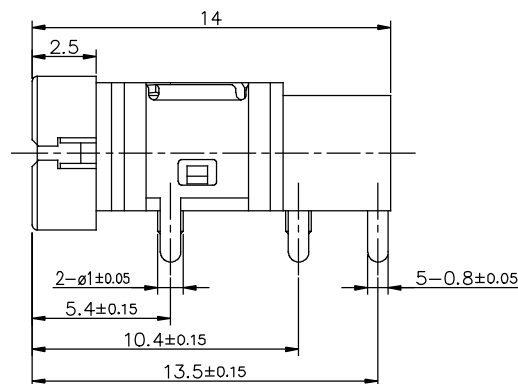


RECOMMENDED PLUG
ø3.5 4-POLE STANDARD PLUG

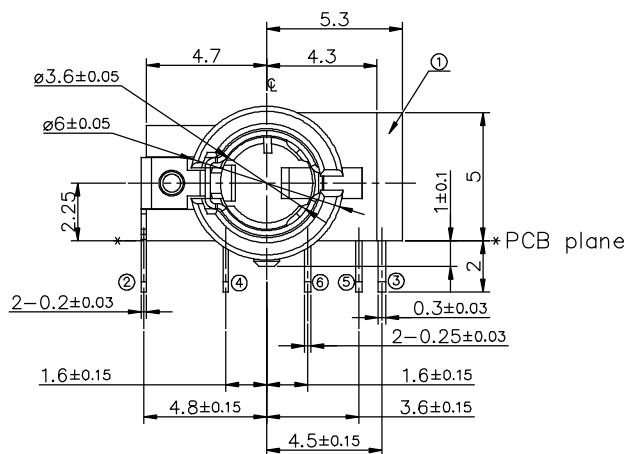


NOTES:

1. MATERIALS & PLATING: SEE MATERIAL TABLE
2. PRODUCT SPECIFICATION: GS-12-1144.
PACKAGE SPECIFICATION: GS-14-2297.
3. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER
COUNTRY REGULATIONS AS DESCRIBED IN GS-47-0004.
4. THE HOUSING WILL WITHSTAND EXPOSURE TO 245°C PEAK
TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDERING APPLICATION.
5. PART NUMBER DEFINITION:
10123764-001XLF

-PACKAGE CODE:
T: TRAY
R: TAPE & REEL

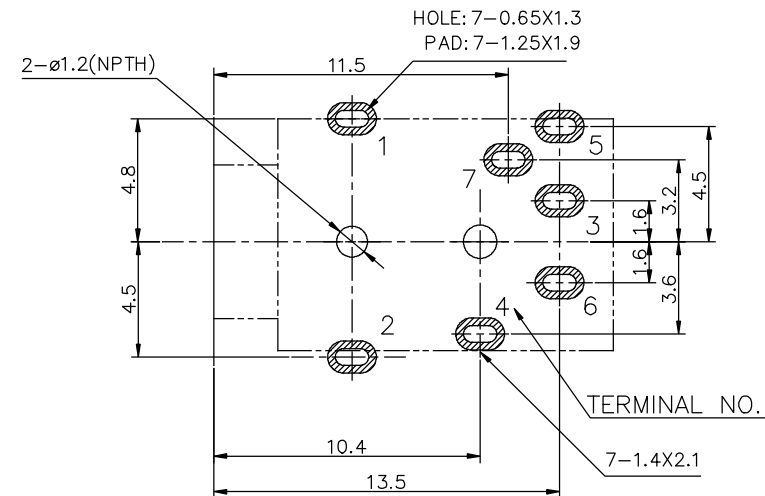

PCB HOLES(THE TOP VIEW) t=1.6mm
NOTE: GENERAL TOLERANCE: $\pm 0.05\text{mm}$

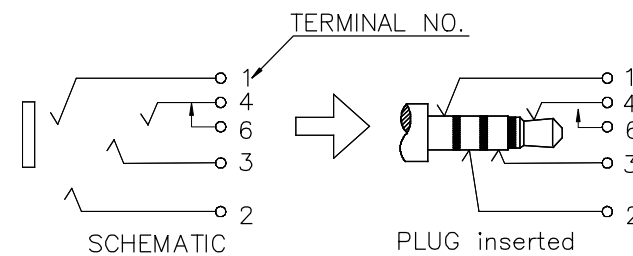

⑥	TERMINAL 6	6	1	COPPER ALLOY t=0.25	Au 1μ"Min
⑤	TERMINAL 4	4	1	COPPER ALLOY t=0.25	Au 1μ"Min
④	TERMINAL 3	3	1	COPPER ALLOY t=0.20	Au 1μ"Min
③	TERMINAL 2	2	1	COPPER ALLOY t=0.30	Au 1μ"Min
②	TERMINAL 1	1	1	COPPER ALLOY t=0.20	Au 1μ"Min
①	HOUSING		1	PBT UL94 V-0	BLACK
NO.	PART NAME	TER'NO.	QTY.	MATERIAL	REMARK

mat'l. code				surface ☒		tolerance ASME Y14.5		projection 		product family			
ltr	ecn	no	dr	date		tolerances unless otherwise specified				title			
A			TAI	2013-05-08		angles	lineal	16<L≤63 ±0.4		3.5mm AUX JACK, 4 SEGMENTS			
B	ELX-T	15747	TAI	2013-09-06				4<L≤16 ±0.3					
								L≤4 ±0.2					
						X±5*		scale					
				dr	KENNY TAI	2012-12-17				dwg no		sheet 1 of 1	size
				enr	KENNY TAI	2012-12-17				10123764			A
				chr	KENNY TAI	2013-04-10							
				appd	PM ZHENG	2013-05-10							
sheet index		revision sheet		B	1								