


UNIT:mm

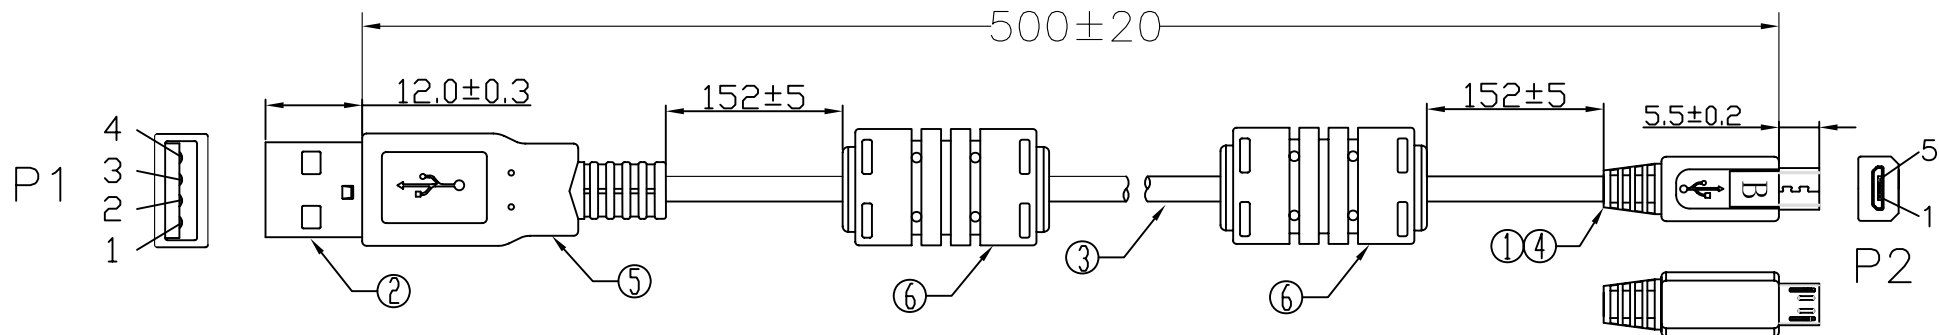

PIN ASSIGNMENT


P1		P2
1	红色	1
2	白色	2
3	绿色	3
4	黑色	5
铁壳	地线+编织	铁壳

Electrical test:

- 100% short, open, miswire test
- Conduct resistance: 5 Ohm(max)
- Insulation resistance: 10Mohm(min)
- dielectric test: DC 300V

NOTE:


1.小PE袋/大PE袋对应料号.包袋数量及时间印刷样式:



印客人产品料号

印对应的装袋数量

表示15周16年(按每次产品生产周期印)

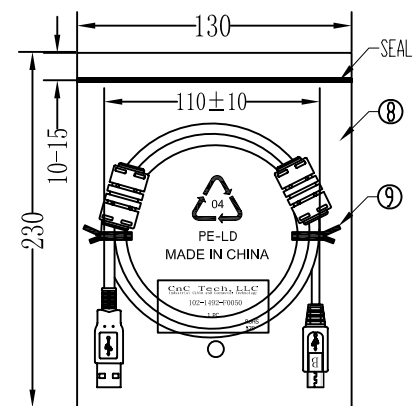

⑩	扎带	2	黑色 L=80mm
⑩	大PE袋	1/10	透明PE袋大小尺寸: 280*330*0.05mm 印刷黑色"MADE IN CHINA"+"10PCS"及印生产周期,有透气孔.
⑨	小PE袋	1	透明PE袋: 130*230*0.05mm 印刷黑色"MADE IN CHINA"+"1PC"及印生产周期,有透气孔.
⑧	外模	15g	黑色 45P PVC (MOULD NO: CH003)
⑦	铁粉芯	2	铁粉芯 OD12*5.6*L20
⑥	外模	5g	黑色 PVC-45P (MOULD NO:WM-40)
⑤	内模	0.35g	透明LD-PE (MOULD NO: NM-86)
④	外模	4.5g	黑色 PVC-45P (MOULD NO: WM-116)
③	线材	1	USB2.0 UL2725 (28AWG*1P+24AWG*2C)+AEB(48B ALMG) L=500±10MM 外被: 黑色 OD:4.5mm
②	接头	1set	USB A公刺破式 一体式长铁壳镀镍 中线夹,铁壳厚度0.3白胶芯白后盖,0.9*1.1端子青铜镀金
①	接头	1	MICRO USB 5P B公 PIN G/F 外壳镀镍 黑胶芯
NO.	NAME	Q'TY	SPECIFICATION

CnC Tech, LLC
Industrial Cable and Connector Technology

DRAWN BY	LYNDON	DRAWING NO	VG/LJQ-094-XXX
CHECKED BY		CUSTOMER	CNC
APPROVAL BY		ITEM NO.	102-1492-F0050
DECIDED BY		DATE	2016-04-21
VERSIONS/EDITEON	A/0	PROJECTION	