



U 1160

Features:

- reed greenglass housing
- hermetically sealed
- vertical and horizontal light incidence

Application:

- flame detectors in oil burner control devices
- contrast control in TV sets
- twilight switching for outdoor application

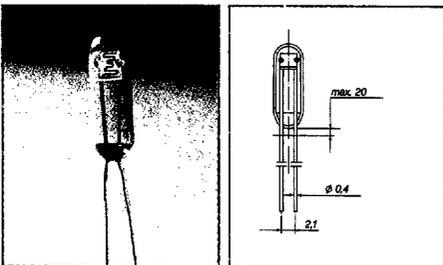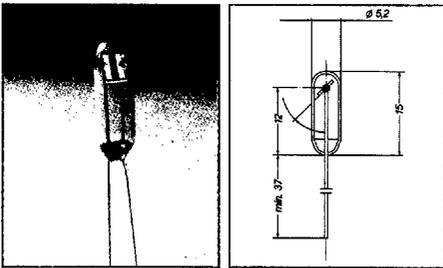

| TYP | R ₁₀ [kΩ] | R ₀₁ [kΩ] | R ₀₅ [kΩ] | V _{max} [V] | P _{max} [mW] | t _{on} [ms] | t _{off} [ms] | TK [%K] |
|-----------|-------------------------|-------------------------|-------------------------|-------------------------|--------------------------|-------------------------|--------------------------|------------|
| U 1160 11 | 20 | 40 | 120 | 150 | 50 | 60 | 35 | 0,3 |
| 1160 12 | 35 | 120 | 360 | 150 | 50 | 50 | 30 | 0,35 |
| 1160 13 | 82 | 380 | 1.150 | 150 | 50 | 35 | 28 | 0,4 |
| 1160 14 | 510 | 6.000 | 15.000 | 150 | 50 | 20 | 25 | 0,5 |
| U 1160 31 | 100 | 340 | 1.020 | 400 | 50 | 60 | 35 | 0,3 |
| 1160 32 | 190 | 1.000 | 3.000 | 400 | 50 | 50 | 30 | 0,35 |
| 1160 33 | 675 | 3.000 | 9.000 | 400 | 50 | 35 | 28 | 0,4 |

