


W 9960

Features:

- epoxy-coated low profile cell
- high reliable power dissipation

Application:

- automatic light switching

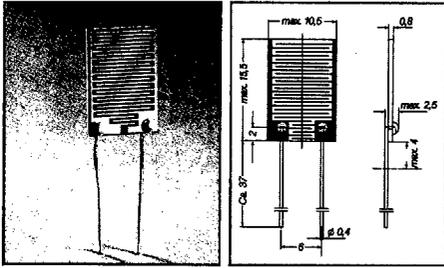

TYP	R ₁₀ [kΩ]	R ₀₁ [kΩ]	R ₀₅ [kΩ]	V _{max} [V]	P _{max} [mW]	t _{on} [ms]	t _{off} [ms]	TK [%/K]
W 9960 11	1,1	5	15	250	350	60	35	0,3
9960 12	1,8	15	45	250	350	50	30	0,35
9960 13	4,5	45	135	250	350	35	28	0,4


C 9860

Features:

- epoxy-coated low profile housing
- high permissible power dissipation
- high operation voltage

Application:

- exposure meters
- automatic street lamp switching
- burner controls

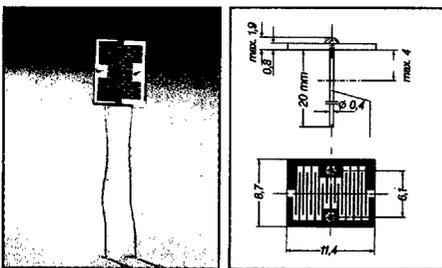

TYP	R ₁₀ [kΩ]	R ₀₁ [kΩ]	R ₀₅ [kΩ]	V _{max} [V]	P _{max} [mW]	t _{on} [ms]	t _{off} [ms]	TK [%/K]
C 9860 23	6,0	90	270	175	400	35	28	0,4

