


Dimensions: mm (in.)

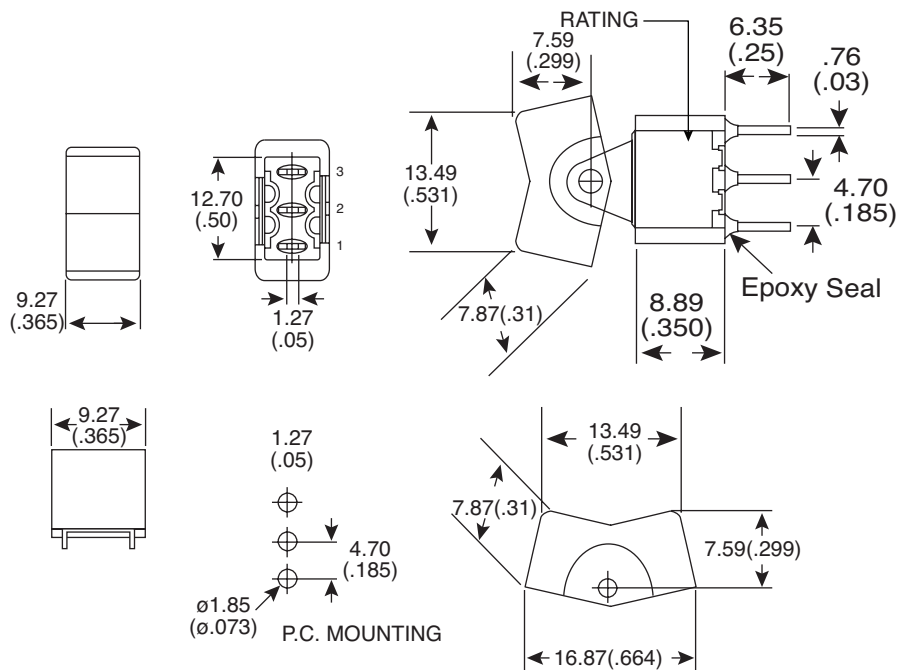

POS. 1	POS. 2	POS. 3
MOM	OFF	MOM
2-3		2-1
Comm. 2-1-3	OPEN	Comm. 2-1-3

Electrical Specifications:

- Rating: 2 A/250 VAC
5A/120 VAC or 28VDC
- Contact Resistance: 10mΩmax. initial @ 2-4VDC 100mA
- Insulation Resistance: 1,000MΩmin.
- Dielectric Strength: 1,000 V RMS @ sea level

Mechanical Specifications:

- Mechanical Life: 50,000 make-and-break cycles.
- Operating Temperature: -30°C to 85°C

Note:

- RoHS compliant by exemption

Materials:

- Case: dially phthalate (DAP)
- Actuator: nylon, black std.
- Bushing: brass, nickel plated
- Housing: stainless steel
- Switch Support: brass, tin plated
- Terminals / Contact: brass, silver or gold plated

Miniature Rocker Switch
103-7010-EVX

Mountain
Switch

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mountain Switch:](#)

[103-7010-EVX](#)