

10 9 8 7 6 5 4 3 2 1

F

E

D

C

B

A

F







E

D


C

B

A

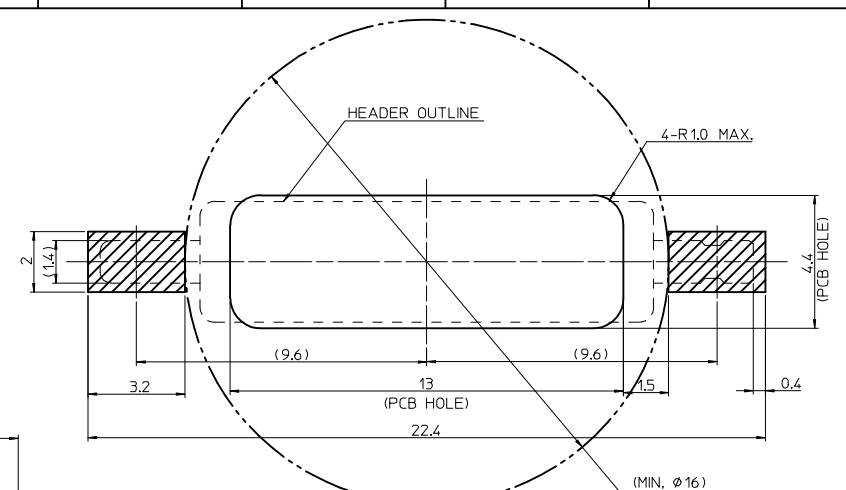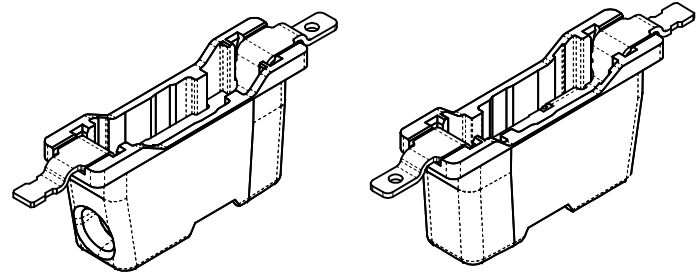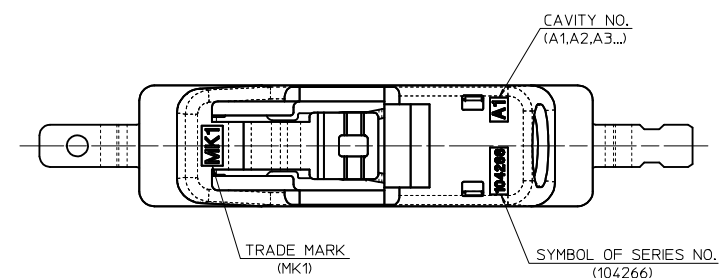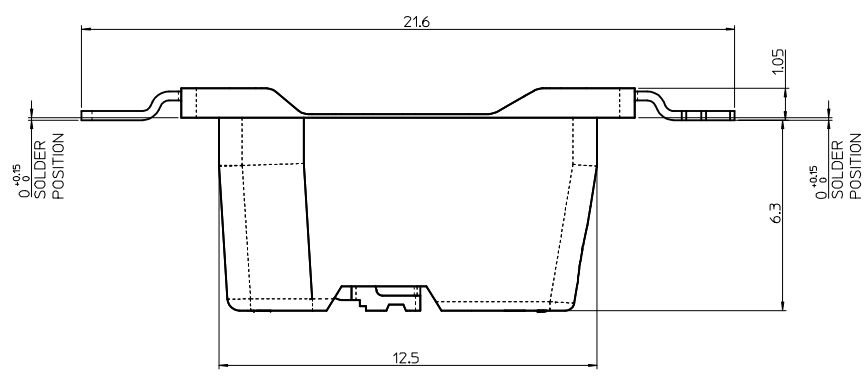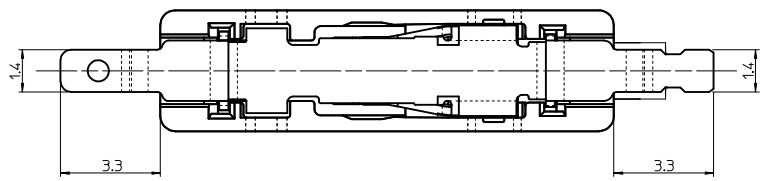

RECOMMENDED PCB LAYOUT
[GENERAL TOLERANCE : ±0.05]
[MINIMUM DIAMETER OF
OPENING IN CHASSIS OR HEATSINK]

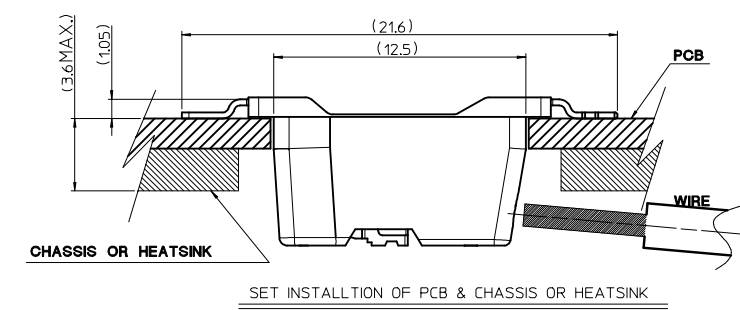

NOTE

- MATERIAL
- HEADER : LCP, GLASS FILLED, UL94V-0
HALOGEN FREE, COLOR OF NATURAL
- CONTACT TERMINAL : COPPER-ALLOY, 0.3mm THICKNESS
- PLATING
- CONTACT TERMINAL : TIN -PLATED
0.84μm MINIMUM TIN PLAINING
- PRODUCT SPECIFICATION : PS-104266-001
- PACKAGING SPECIFICATION : PK-104266-001
- COPLANALITY OF SOLDER TAILS (PEAK TEMP. : 260°C)
BEFORE & AFTER REFLOW : 0.08 MAX.
- APPLICABLE SOLIDE WIRE RANGE :
(OUTSIDE WIRE INSULATION : 2.1mm DIAMETER MAX.)
- SOLID WIRE : AWG #24~#18
- STRAND WIRE : AWG #24~#20

RELEASED EC NO: KOR2016-0078 A	DRAWN: SCHONG3 2016/02/20 CHKD: SHCHU 2016/02/20 APPR: YSKIM02 2016/03/03			QUALITY SYMBOLS ▽=0 ▼=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE 6:1	DESIGN UNITS METRIC		THIRD ANGLE PROJECTION
	DESCRIPTION				mm	INCH	DRAWN BY SCHONG3	DATE 2016/02/20	TITLE LITE TRAP CONN. BOTTOM ENTRY TYPE HEADER ASS'Y 1CKT molex				
		4 PLACES	± ---		± ---	CHECKED BY SHCHU	DATE 2016/02/20						
		3 PLACES	± ---		± ---								
REV				2 PLACES	± 0.15	± ---	APPROVED BY YSKIM02	DATE 2016/03/03	DOCUMENT NO. SD-104266-001 SHEET NO. 1 OF 1				
				1 PLACE	± 0.20	± ---							
				0 PLACE	± ---	± ---							
				ANGULAR ± 1 °		MATERIAL NO. 1042660110							
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

9 8 7 6 5 4 3 2 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[104266-0110](#)