



## MINI PACK

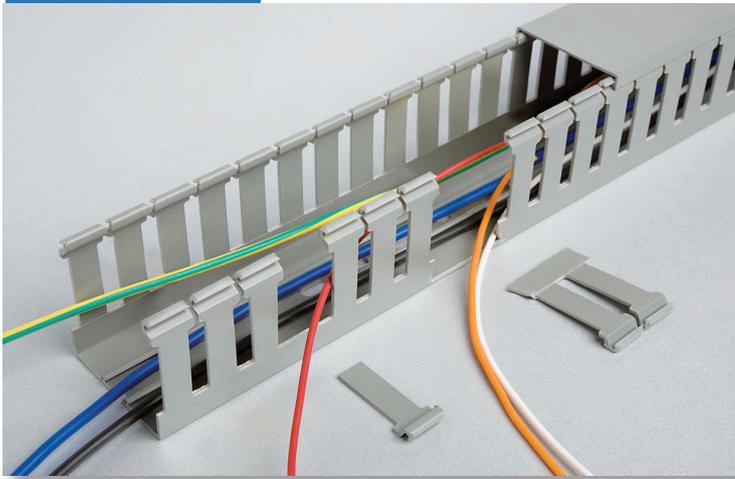


Betaduct PVC metric open slot provides lightweight self-extinguishing cable trunking with excellent rigidity and performance characteristics. A smooth wire entry allows for quick and easy re-routing of wires.

Recommended fixing method - Betaduct rivets. Supplied with a lid. Available in 3 sizes.

### Side Slot Design

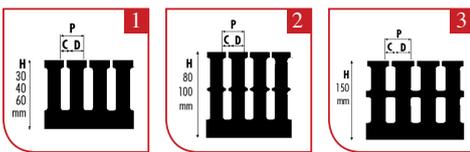

### Base Hole Design

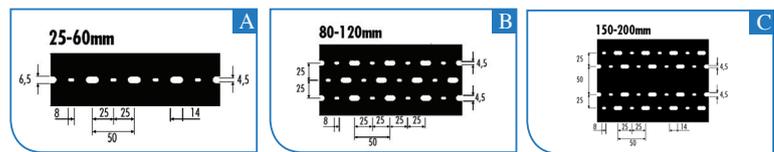

### Specification:

**Material:** Self-extinguishing PVC

**Slot Pitch:** 20mm

**Slot Width:** 8mm

**Webs:** 12mm

**Flammability:** UL94 V-0 Rated material

**Service temperature rating:** 15°C to + 60°C

**Standards:** RoHS 2 compliant, UL94 V-0, A Norme EN50085-2-3, CSA, UR, RINA, CE marked

### Part Numbers:

RS PART NO.	BETADUCT PART NO.	EXTERNAL SIZE WXH (mm)	USABLE SECTION (mm <sup>2</sup> )	BASE HOLE DESIGN	SIDE SLOT DESIGN	C	D	P	PACK QUANTITY METRES
8781158	10430022	25 x 40	760	A	1	8	12	20	4 x 1m
8781151	10430032	40 x 40	1310	A	1	8	12	20	4 x 1m
8781139	10430034	40 x 80	2680		2	8	12	20	4 x 1m