

Distributed by:

**JAMECO**<sup>®</sup>  
ELECTRONICS



**www.Jameco.com ♦ 1-800-831-4242**

The content and copyrights of the attached  
material are the property of its owner.





Jameco Part Number 747868

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
J		EC 0G3C 0712 04		01DEC04	BSV	DLS	

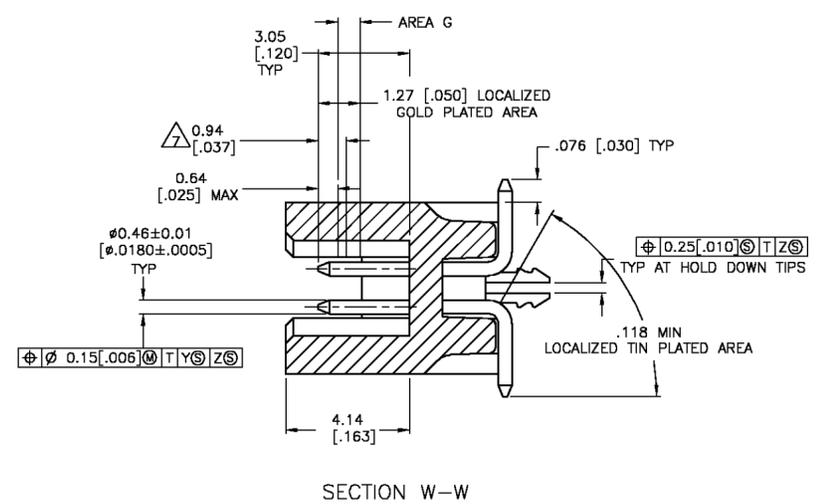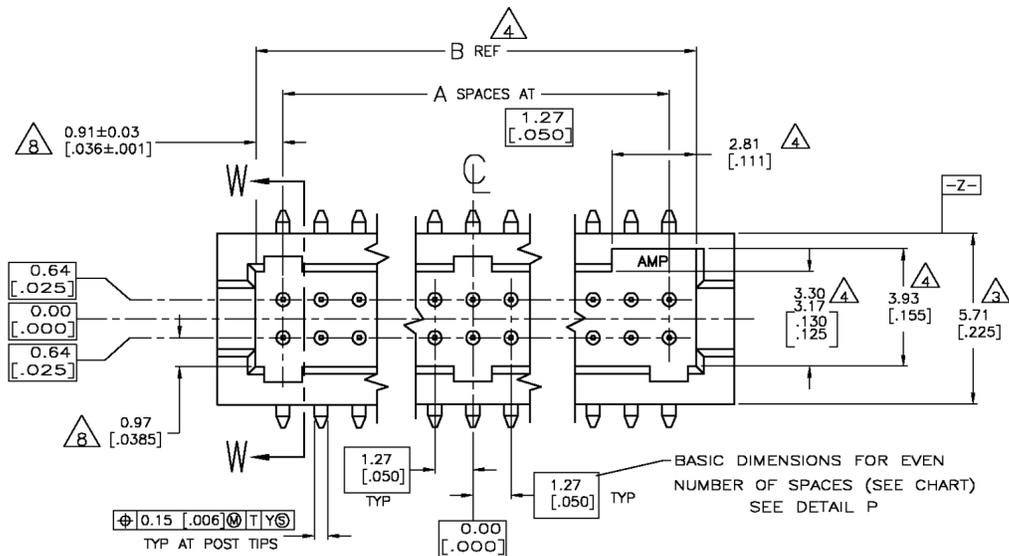

- △ 0.00076[.000030] GOLD AT POINT OF MEASUREMENT, 0.00051[.000020] MIN AT THE END POINTS OF AREA G, (LOCALIZED PLATE AREA), 0.0038[.000150] TIN-LEAD ON LOCALIZED TIN PLATED AREA, ALL OVER 0.0013[.000050] NICKEL.
- △ USE 1.32 ±0.02 [.0520±.0010] DRILLED HOLE (#55 DRILL). FINISH TO BE TIN PLATE OVER 0.02 [.001] MIN COPPER.
- △ DIMENSION APPLIES AT BASE OF SHROUD.
- △ THE NOTED DIMENSIONS APPLY AT THE MATING FACE OF THE HOUSING.
- △ 0.0038 [.000150] TIN-LEAD ON HOLD DOWN, ALL OVER 0.0013 [.000050] NICKEL.
- 6. IF PLANNING TO USE MORE THAN ONE MATING PAIR OF CONNECTORS TO INTERCONNECT 2 BOARDS, PLEASE REFER TO PARA. 3.3 IN THE APPLICATION SPEC, #114-7010
- △ POINT OF MEASUREMENT
- △ DIMENSIONS NOTED APPLY FROM THE BASIC DIMENSION LINE (NOT THE CIRCUIT CAVITY CENTER LINE) TO THE SURFACE INDICATED.
- △ 0.00076(0.000030) GOLD AT POINT OF MEASUREMENT, 0.00051(.000020) MIN AT THE END POINTS OF AREA G, (LOCALIZED PLATE AREA), 0.0038(.000150) TIN ON LOCALIZED TIN PLATED AREA, ALL OVER 0.0013(.000050) NICKEL.
- △ 0.0038 (.000150) TIN ON HOLDDOWN, ALL OVER 0.0013 (.000050) NICKEL.

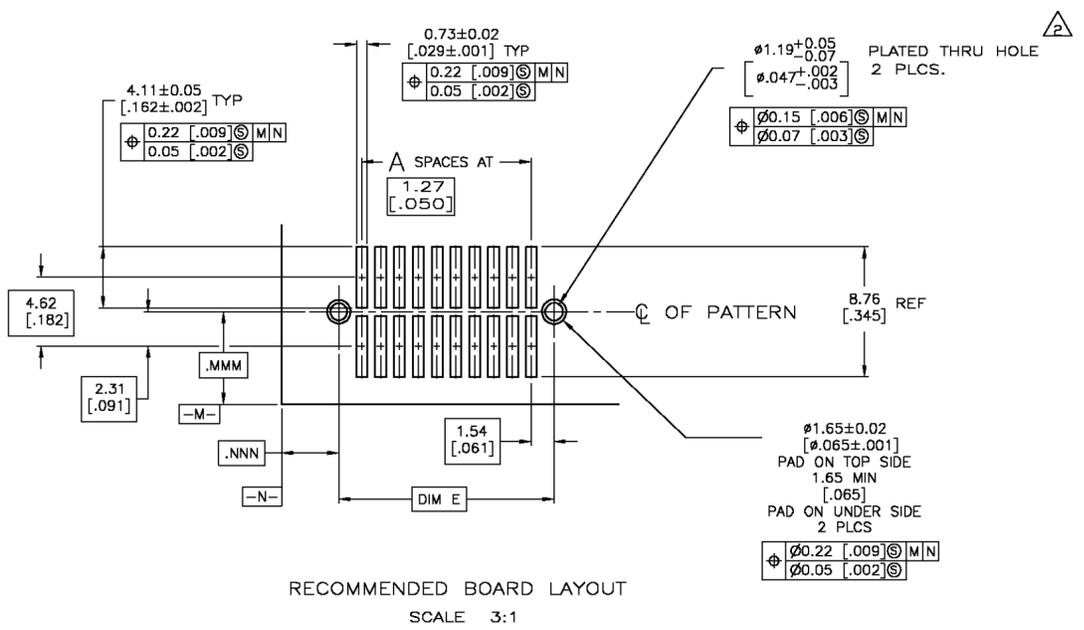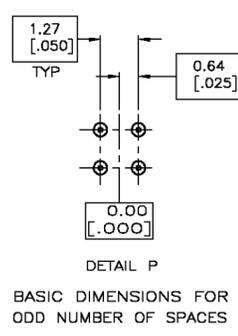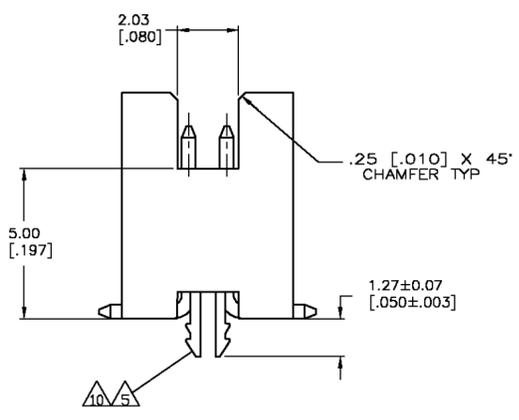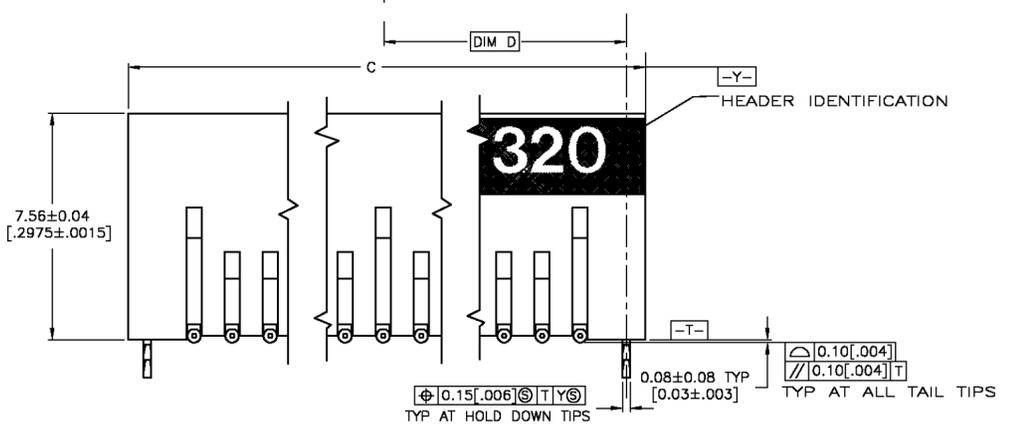

65.33 [2.572]	32.66 [1.286]	66.59 [2.622]	64.05 [2.522]	49	100	△ 6-104656-0
58.98 [2.322]	29.48 [1.161]	60.24 [2.372]	57.70 [2.272]	44	90	△ 5-104656-9
52.63 [2.072]	26.31 [1.036]	53.89 [2.122]	51.35 [2.022]	39	80	△ 5-104656-8
46.28 [1.822]	23.13 [.911]	47.54 [1.872]	45.00 [1.772]	34	70	△ 5-104656-7
39.93 [1.572]	19.96 [.786]	41.19 [1.622]	38.65 [1.522]	29	60	△ 5-104656-6
33.58 [1.322]	16.78 [.661]	34.84 [1.372]	32.30 [1.272]	24	50	△ 5-104656-5
27.23 [1.072]	13.61 [.536]	28.49 [1.122]	25.95 [1.022]	19	40	△ 5-104656-4
20.88 [.822]	10.43 [.411]	22.14 [.872]	19.60 [.772]	14	30	△ 5-104656-3
14.53 [.572]	7.26 [.286]	15.79 [.622]	13.25 [.522]	9	20	△ 5-104656-2
8.18 [.322]	4.08 [.161]	9.44 [.372]	6.90 [.272]	4	10	△ 5-104656-1
65.33 [2.572]	32.66 [1.286]	66.59 [2.622]	64.05 [2.522]	49	100	1-104656-0
58.98 [2.322]	29.48 [1.161]	60.24 [2.372]	57.70 [2.272]	44	90	104656-9
52.63 [2.072]	26.31 [1.036]	53.89 [2.122]	51.35 [2.022]	39	80	104656-8
46.28 [1.822]	23.13 [.911]	47.54 [1.872]	45.00 [1.772]	34	70	104656-7
39.93 [1.572]	19.96 [.786]	41.19 [1.622]	38.65 [1.522]	29	60	104656-6
33.58 [1.322]	16.78 [.661]	34.84 [1.372]	32.30 [1.272]	24	50	104656-5
27.23 [1.072]	13.61 [.536]	28.49 [1.122]	25.95 [1.022]	19	40	104656-4
20.88 [.822]	10.43 [.411]	22.14 [.872]	19.60 [.772]	14	30	104656-3
14.53 [.572]	7.26 [.286]	15.79 [.622]	13.25 [.522]	9	20	104656-2
8.18 [.322]	4.08 [.161]	9.44 [.372]	6.90 [.272]	4	10	104656-1
E	D	C	B	A	NUMBER OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 [.005] 3 PLC ± - 4 PLC ± - ANGLES ± 0° 30'	DWN KATE HELM 08/07/91 CHK D. GORENC 8/12/91 APVD D. GORENC 8/12/91 PRODUCT SPEC - APPLICATION SPEC - WEIGHT -	tyco Electronics Tyco Electronics Corporation Harrisburg, Pa 17105-3608
MATERIAL: HOUSING: LCP, COLOR-BLACK POST: PHOS BRONZE HOLD DOWN: COPPER ALLOY	FINISH 1 5 9 10	NAME D. GORENC PRODUCT SPEC APPLICATION SPEC WEIGHT	SIZE A2 CAGE CODE 00779 DRAWING NO C=104656 RESTRICTED TO -

CUSTOMER DRAWING SCALE 6:1 SHEET 1 OF 1 REV J