


RF Coax Connectors


SMA Connectors (Continued)
Panel Mount, Solder Pot Terminal (Continued)

2 Hole Flange Mount Jack Receptacle

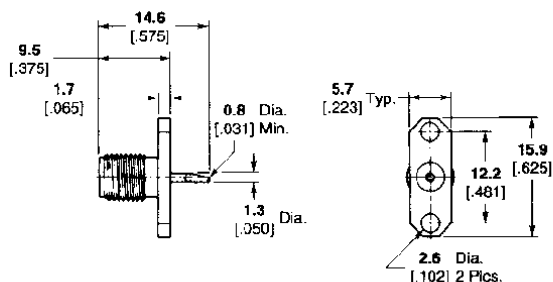


Body Material & Finish	Contact Caplivation	RF Leakage db min.	Temperature Range	M/A-COM Model No.	Part No.
Stainless, Passivated	Epoxy	-(60-1GHz)	-65 to 125° C	2052-1350-02	1052544-1

2 Hole Flange Mount Jack Receptacle

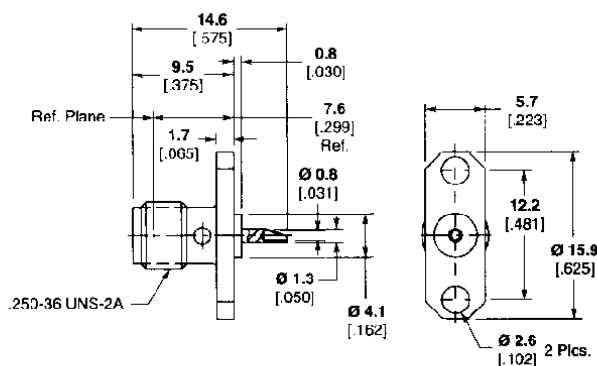

Body Material & Finish	Contact Captivation	RF Leakage db min.	Temperature Range	M/A-COM Model No.	Part No.
Stainless, Passivated	Epoxy	-(60-fGHz)	-65 to 125° C	2052-1300-02	1052534-1

Bulkhead Feedthrough Jack Receptacle

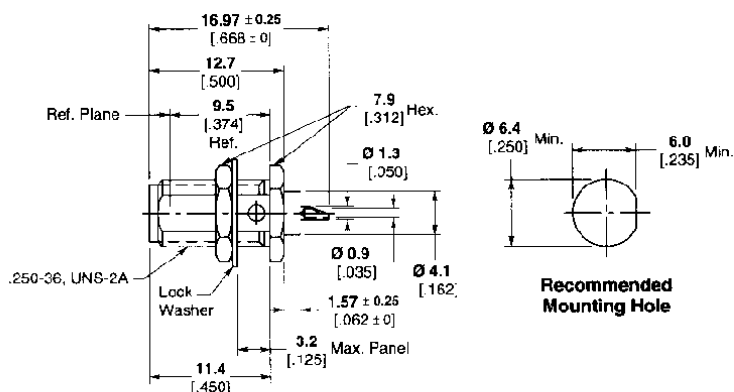

Body Material & Finish	Contact Captiveion	RF Leakage db min.	Temperature Range	M/A-COM Model No.	Part No.
Stainless, Passivated	Epoxy	-(60-1GHz)	-65 to 125° C	2056-0000-02	1053073-1