


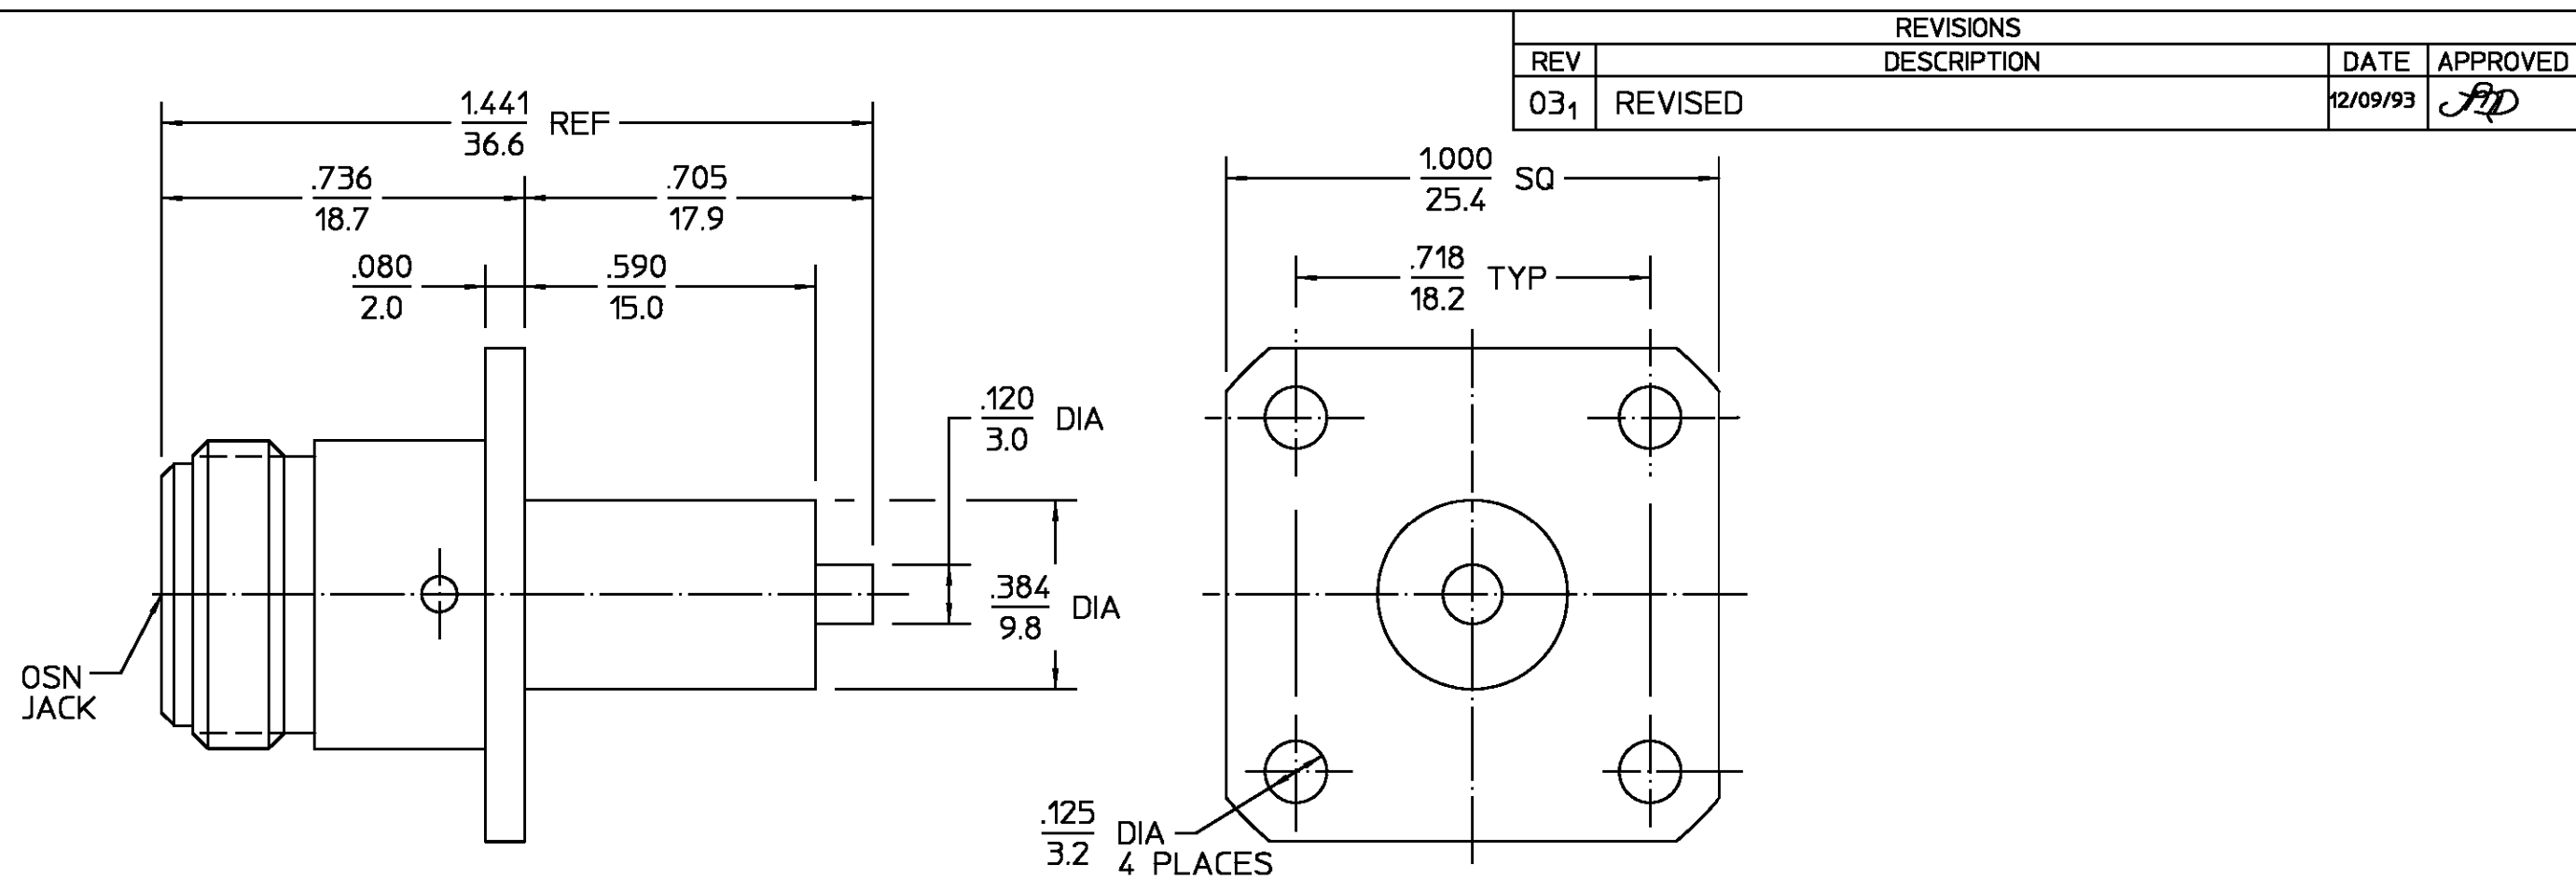

ELECTRICAL	MECHANICAL	ENVIRONMENTAL	HOUSING		BRASS PER ASTM-B-16 COMP. 360, HALF HARD		NICKEL PLATE PER QQ-N-290		
Nominal Impedance (Ohms) 50	Interface Dimensions MIL-STD-348A, Fig. 304.2	Temperature Rating -65°C to +165°C	DIELECTRIC		PTFE FLUOROCARBON PER ASTM-D-1457		N/A		
Frequency Range (GHz) DC to 11	Recommended Mating	Vibration MIL-STD-202, Method 204, Condition B.	CENTER CONTACT		BERYLLIUM COPPER PER ASTM B 196, ALLOY C17300, CONDITION H		GOLD PLATE PER MIL-G-45204 OVER NICKEL PLATE PER QQ-N-290		
Volt Rating (VRMS MAX) @ Sea Level 250	Torque 12 - 15 in-lbs	Shock MIL-STD-202, Method 213, Condition I.	COMPONENT		MATERIAL		FINISH		
VSWR 1.10 + .01 f(GHz)	Mating Characteristics:	Thermal Shock MIL-STD-202, Method 107, Condition B.	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ON		DRAWN BY RMK DATE 11-6-70		AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599		
Insertion Loss (dB MAX) .07 √f(GHz)	Insertion (MAX Lbs) 2.0	Except High Temp 85°C	FRAC. DEC. ANGLES ± 1/64 ±.005 ± 1°		CHECKED BY PRB 11-20-70				
RF Leakage (dB MIN) -[60- f(GHz)]	Withdrawal (MIN Oz) 2.0	Moisture Resistance MIL-STD-202, Method 106	APPROD BY PRB 11-24-70		AMP				
Corona, 70,000 Ft (VRMS MIN) 500	Force to Engage and Disengage (In-Lbs MAX) 6.0	Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray	These drawings and specifications are the property of AMP Incorporated and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.		USE ASS'Y PROCEDURE		TITLE OSN 4 HOLE FLANGE MOUNT JACK RECEPTACLE STRAIGHT TERMINAL		
Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 2,500	Center Contact Captivation	.XXX = in XX.X = mm (REF)	NO. AP. N/A		SIZE B		CODE IDENT NO. 26805	3052-1201-10	REV 03 ₁
Contact Resistance (Milliohms MAX) Center Contact 4.0 Outer Contact 0.2 Cable to Housing N/A	Axial (Lbs) 6.0 Radial (In-Oz) 4.0				SCALE 3 : 1		SHEET 1 OF 1		
RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 1,500	Cable Retention								
I.R.(Megohms MIN) 5,000	Axial Force (Lbs) N/A Torque (In-Oz) N/A								
	Weight (Grams) TBD								

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3052-1201-10](#)