


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
		C	REVISED PER EC OS14-0178-05	07JUN05	BM KW

1. CAPTURED CENTER CONTACT
2. DESIGNED FOR USE WITH .085 SEMI-RIGID CABLE

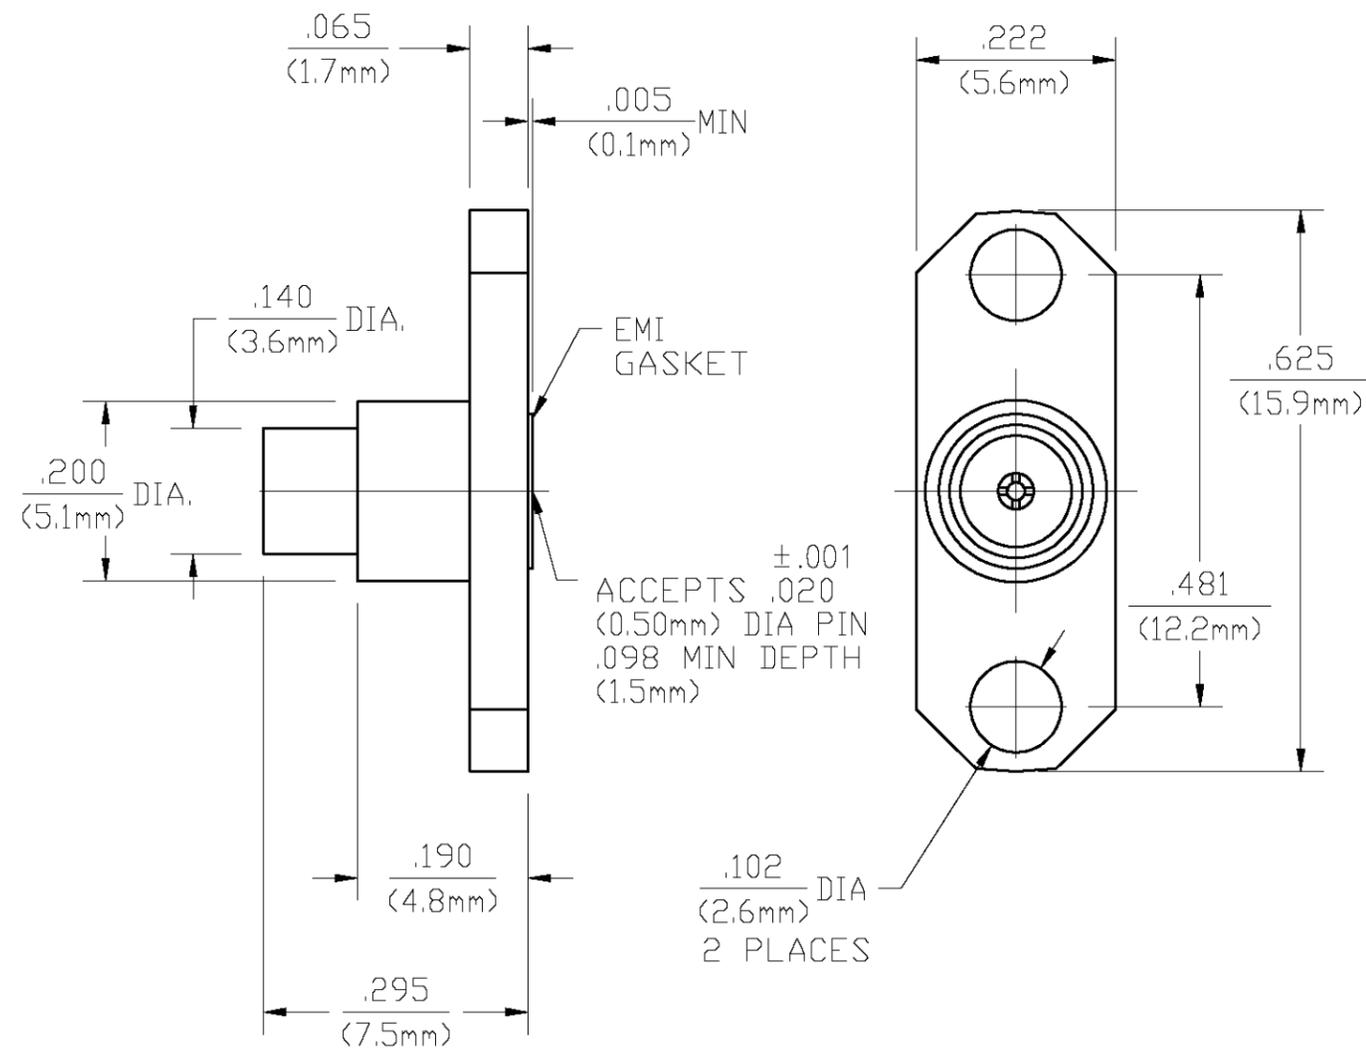

CABLE ENTRY DIAMETERS MINIMUM	
HOUSING	.089
CONTACT	.021

COMPONENT	MATERIAL	FINISH
HOUSING	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	GOLD PLATE PER MIL-G-45204 OVER NICKEL PLATE PER QQ-N-290
DIELECTRIC	TFE FLUOROCARBON ASTM-D-1457	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM B 196, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204 OVER NICKEL PLATE PER QQ-N-290
GASKET	CONDUCTIVE ELASTOMERS PER MIL-G-83528	N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN G.D.D. 9/21/92	Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: INCHES 		CHK -	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .005 4 PLC ± - ANGLES ± 1°		APVD <i>MOD</i> 9/21/92	FIELD REPLACEABLE 2 HOLE FLANGE MOUNT CABLE JACK RECEPTACLE DIRECT SOLDER ATTACHMENT	
MATERIAL -		PRODUCT SPEC -	SIZE A3	CAGE CODE 00779
FINISH -		APPLICATION SPEC -	DRAWING NO C-1063681	RESTRICTED TO -
CUSTOMER DRAWING			WEIGHT -	SCALE 5:1
			SHEET 1 OF 1	REV C