

Hi-Reliability Optically Coupled Isolator



3C91C, 3C92C, 3N243, 3N244, 3N245, 3N261, 3N262, 3N263 (TX, TXV)



Features:

- TO-72 hermetically sealed package
- 1 kVDC electrical isolation
- High current transfer ratio
- TX and TXV devices processed to MIL-PRF-19500

Description:

Each device is a high reliability optically coupled isolator that consists of an infrared emitting diode and a NPN silicon phototransistor which are mounted in a hermetically sealed TO-72 package. The **3C91C** and **3C92C** have a 935 nm wavelength, whereas the **3N243**, **3N244**, **3N245**, **3N261**, **3N262** and **3N263** have an 880 nm wavelength. All devices have 0.50" (12.70 mm) leads. Electrical characteristics vary. The **3N261TX**, **3N262TX** and **3N263TX** devices are similar to JEDEC registered optically coupled isolators.

TX and TXV devices are processed to OPTEK's military screening program patterned after MIL-PRF-19500.

Please refer to Application Bulletins 208 and 210 for additional design information and reliability (degradation) data.


Contact your local representative or OPTEK for more information.

Applications:


- High-voltage isolation between input and output
- Electrical isolation in dirty environments
- Industrial equipment
- Medical equipment
- Office equipment

Part Number	LED Peak Wavelength	Sensor	Isolation Voltage (,000)	CTR Min / Max	I _F (mA) Typ / Max	V _{CE} (V) Typ / Max	Lead Length
3C91C (TX, TXV)	935 nm	Transistor	1	0.3 / 2.0	10 / 50	10 / 50	0.50"
3C92C (TX, TXV)							
3N243 (TX, TXV)	0.15 / NA			3 / 40	10 / 30		
3N244 (TX, TXV)	0.3 / NA						
3N245 (TX, TXV)	0.6 / NA			1 / 40	5 / 30		
3N261 (TX, TXV)	.05 / NA						
3N262 (TX, TXV)	1.0 / 5.0						
3N263 (TX, TXV)	2.0 / 10.0						

Phototransistor Collector is connected to the Header-Base-Case for ALL versions

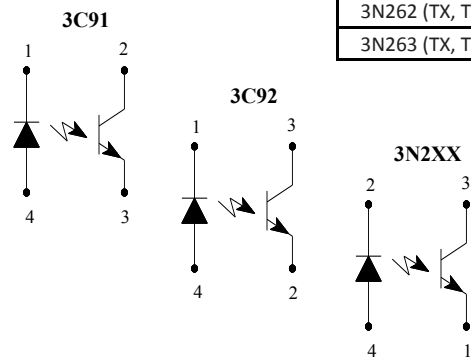

Pin #	3C91	3C92	3N2XX
1	Cathode	Cathode	Emitter
2	Collector	Emitter	Cathode
3	Emitter	Collector	Collector
4	Anode	Anode	Anode

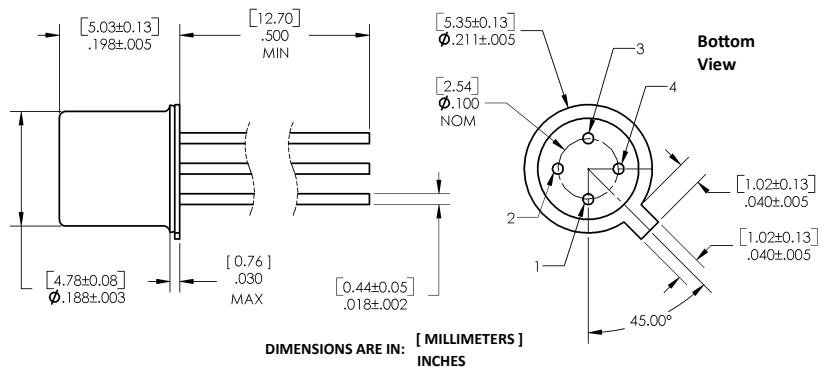

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | Optek Technology, Inc.
1645 Wallace Drive, Ste. 130, Carrollton, TX USA 75006 | Ph: +1 972 323 2200
www.ttelectronics.com | sensors@ttelectronics.com

Hi-Reliability Optically Coupled Isolator



Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Operating Temperature Range	-55°C to $+125^\circ\text{C}$
Storage Temperature Range	-65°C to $+150^\circ\text{C}$
Input to Output Isolation Voltage	$\pm 1\text{ kVDC}^{(1)}$
Lead Soldering Temperature [1/16 inch (1.6 mm) from case for 5 seconds with soldering iron]	$260^\circ\text{C}^{(2)}$

Input Diode


Forward DC Current	40 mA
Reverse Voltage	2.0 V
Power Dissipation	$60\text{ mW}^{(3)}$

Output Phototransistor

Continuous Collector Current	30 mA
Collector-Emitter Voltage	30 V
Emitter-Collector Voltage	5.0 V
Power Dissipation	$200\text{ mW}^{(4)}$

Notes:

1. Measured with input leads shorted together and output leads shorted together.
2. RMA flux is recommended. Duration can be extended to 10 seconds maximum when flow soldering.
3. Derate linearly $2.0\text{ mW}/^\circ\text{C}$ above 25°C .
4. Derate linearly $0.60\text{ mW}/^\circ\text{C}$ above 65°C .

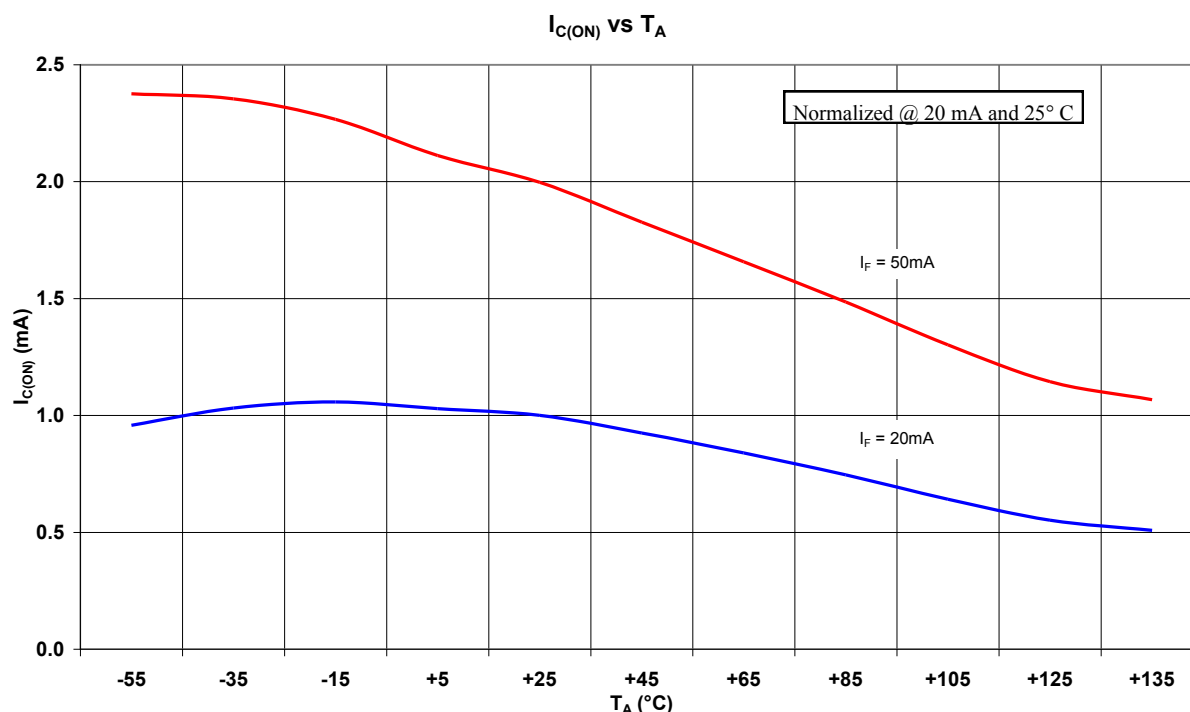

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | Optek Technology, Inc.
1645 Wallace Drive, Ste. 130, Carrollton, TX USA 75006 | Ph: +1 972 323 2200
www.ttelectronics.com | sensors@ttelectronics.com

Hi-Reliability Optically Coupled Isolator



Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
--------	-----------	-----	-----	-----	-------	-----------------

Input Diode

V_F	Forward Voltage					
	3C91C, 3C92C (TX, TXV)	-	-	1.2		$I_F = 2 \text{ mA}$
	3C91C, 3C92C (TX, TXV)	-	-	1.5		$I_F = 50 \text{ mA}$
	3N243, 3N244, 3N245 (TX, TXV)	0.8	-	1.3		$I_F = 10 \text{ mA}$
	3N243, 3N244, 3N245 (TX, TXV)	1.0	-	1.5	V	$I_F = 10 \text{ mA}, T_A = -55^\circ\text{C}$
	3N243, 3N244, 3N245 (TX, TXV)	0.7	-	1.2		$I_F = 10 \text{ mA}, T_A = -100^\circ\text{C}$
	3N261, 3N262, 3N263 (TX, TXV)	0.8	-	1.5		$I_F = 10 \text{ mA}$
	3N261, 3N262, 3N263 (TX, TXV)	1.0	-	1.7		$I_F = 10 \text{ mA}, T_A = -55^\circ\text{C}$
	3N261, 3N262, 3N263 (TX, TXV)	0.7	-	1.3		$I_F = 10 \text{ mA}, T_A = -100^\circ\text{C}$
V_R	Reverse Voltage					
	3C91C, 3C92C (TX, TXV)	7	-	-	V	$I_R = 0.1 \text{ mA}$
I_R	Reverse Current					
	3C91C, 3C92C (TX, TXV)	-	-	1	μA	$V_R = 3.0 \text{ V}$
	3N243, 3N244, 3N245 (TX, TXV)	-	-	100		$V_R = 2.0 \text{ V}$
	3N261, 3N262, 3N263 (TX, TXV)	-	-	100		$V_R = 2.0 \text{ V}$
C_{IN}	Diode Capacitance					
	3C91C, 3C92C (TX, TXV)	-	25	-	pF	$V = 0, f = 1 \text{ MHz}$

Output Phototransistor

$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage					
	3C91C, 3C92C (TX, TXV)	50	-	-	V	$I_C = 10.0 \text{ mA}$
	3N243, 3N244, 3N245 (TX, TXV)	30	-	-		$I_C = 1.0 \text{ mA}$
	3N261, 3N262, 3N263 (TX, TXV)	40	-	-		$I_C = 1.0 \text{ mA}$
$V_{(BR)ECO}$	Emitter-Collector Breakdown Voltage					
	3C91C, 3C92C (TX, TXV)	7	-	-	V	$I_C = 10 \mu\text{A}$
	3N243, 3N244, 3N245 (TX, TXV)	5	-	-		$I_E = 100 \mu\text{A}$
	3N261, 3N262, 3N263 (TX, TXV)	7	-	-		$I_E = 100 \mu\text{A}$
I_{CEO}	Collector Dark Current					
	3C91C, 3C92C (TX, TXV)	-	-	10	nA	$V_{CE} = 5 \text{ V}$
	3C91C, 3C92C (TX, TXV)	-	-	50	nA	$V_{CE} = 50 \text{ V}$
	3N243, 3N244, 3N245 (TX, TXV)	-	-	100	nA	$V_{CE} = 10.0 \text{ V}$
	3N243, 3N244, 3N245 (TX, TXV)	-	-	100	μA	$V_{CE} = 10.0 \text{ V}, T_A = 100^\circ\text{C}$
	3N261, 3N262, 3N263 (TX, TXV)	-	-	100	μA	$V_{CE} = 10.0 \text{ V}$
	3N261, 3N262, 3N263 (TX, TXV)	-	-	100	μA	$V_{CE} = 10.0 \text{ V}, T_A = 100^\circ\text{C}$

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | Optek Technology, Inc.
1645 Wallace Drive, Ste. 130, Carrollton, TX USA 75006 | Ph: +1 972 323 2200
www.ttelectronics.com | sensors@ttelectronics.com

Hi-Reliability Optically Coupled Isolator



Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Coupled						
$I_{C(ON)}$	On-State Collector Current					
	3C91C, 3C92C (TX, TXV)	4.0	-	-		$I_F = 10\text{ mA}$, $V_{CE} = 5\text{ V}$
	3C91C, 3C92C (TX, TXV)	3.0	-	20		$I_F = 10\text{ mA}$, $V_{CE} = 0.4\text{ V}$
	3N243 (TX, TXV)	1.5	-	-		$I_F = 10\text{ mA}$, $V_{CE} = 10.0\text{ V}$
	3N243 (TX, TXV)	0.3	-	-		$I_F = 3\text{ mA}$, $V_{CE} = 10.0\text{ V}$
	3N243 (TX, TXV)	0.5	-	-		$I_F = 10\text{ mA}$, $V_{CE} = 10.0\text{ V}$, $T_A = 55^\circ\text{ C}$
	3N243 (TX, TXV)	0.5	-	-		$I_F = 10\text{ mA}$, $V_{CE} = 10.0\text{ V}$, $T_A = 100^\circ\text{ C}$
	3N244 (TX, TXV)	3.0	-	-		$I_F = 10\text{ mA}$, $V_{CE} = 10.0\text{ V}$
	3N244 (TX, TXV)	0.8	-	-		$I_F = 3\text{ mA}$, $V_{CE} = 10.0\text{ V}$
	3N244 (TX, TXV)	1.0	-	-		$I_F = 10\text{ mA}$, $V_{CE} = 10.0\text{ V}$, $T_A = 55^\circ\text{ C}$
	3N244 (TX, TXV)	1.0	-	-		$I_F = 10\text{ mA}$, $V_{CE} = 10.0\text{ V}$, $T_A = 100^\circ\text{ C}$
	3N245 (TX, TXV)	6.0	-	-		$I_F = 10\text{ mA}$, $V_{CE} = 10.0\text{ V}$
	3N245 (TX, TXV)	1.5	-	-		$I_F = 3\text{ mA}$, $V_{CE} = 10.0\text{ V}$
	3N245 (TX, TXV)	1.5	-	-		$I_F = 10\text{ mA}$, $V_{CE} = 10.0\text{ V}$, $T_A = 55^\circ\text{ C}$
	3N245 (TX, TXV)	1.5	-	-		$I_F = 10\text{ mA}$, $V_{CE} = 10.0\text{ V}$, $T_A = 100^\circ\text{ C}$
	3N261 (TX, TXV)	0.5	-	-		$I_F = 1\text{ mA}$, $V_{CE} = 5.0\text{ V}$
	3N261 (TX, TXV)	0.7	-	-		$I_F = 2.0\text{ mA}$, $V_{CE} = 5.0\text{ V}$, $T_A = 55^\circ\text{ C}$
	3N261 (TX, TXV)	0.5	-	-		$I_F = 2.0\text{ mA}$, $V_{CE} = 5.0\text{ V}$, $T_A = 100^\circ\text{ C}$
	3N262 (TX, TXV)	1.0	-	5		$I_F = 1\text{ mA}$, $V_{CE} = 5.0\text{ V}$
	3N262 (TX, TXV)	1.4	-	-		$I_F = 2.0\text{ mA}$, $V_{CE} = 5.0\text{ V}$, $T_A = 55^\circ\text{ C}$
	3N262 (TX, TXV)	1.0	-	-		$I_F = 2.0\text{ mA}$, $V_{CE} = 5.0\text{ V}$, $T_A = 100^\circ\text{ C}$
	3N263 (TX, TXV)	2.0	-	10		$I_F = 1\text{ mA}$, $V_{CE} = 5.0\text{ V}$
	3N263 (TX, TXV)	2.8	-	-		$I_F = 2.0\text{ mA}$, $V_{CE} = 5.0\text{ V}$, $T_A = 55^\circ\text{ C}$
	3N263 (TX, TXV)	2.0	-	-		$I_F = 2.0\text{ mA}$, $V_{CE} = 5.0\text{ V}$, $T_A = 100^\circ\text{ C}$
$V_{CE(SAT)}$	Collector-Emitter Saturation Voltage					
	3C91C, 3C92C (TX, TXV)	-	-	0.4		$I_F = 50\text{ mA}$, $I_C = 10\text{ mA}$
	3N243, 3N244, 3N245 (TX, TXV)	-	-	0.3		$I_F = 20\text{ mA}$, $I_C = 1.50\text{ mA}$
	3N243, 3N244, 3N245 (TX, TXV)	-	-	0.3		$I_F = 20\text{ mA}$, $I_C = 3.0\text{ mA}$
	3N243, 3N244, 3N245 (TX, TXV) 3N261,	-	-	0.3		$I_F = 20\text{ mA}$, $I_C = 6.0\text{ mA}$
	3N262, 3N263 (TX, TXV)	-	-	0.3		$I_F = 2.0\text{ mA}$, $I_C = 0.50\text{ mA}$
	3N261, 3N262, 3N263 (TX, TXV)	-	-	0.3		$I_F = 2.0\text{ mA}$, $I_C = 1.0\text{ mA}$
	3N261, 3N262, 3N263 (TX, TXV)	-	-	0.3		$I_F = 2.0\text{ mA}$, $I_C = 2.0\text{ mA}$
t_{ON}	Turn-on Time 3C91C, 3C92C (TX, TXV)	-	-	9	μs	$V_{CC} = 5\text{ V}$, $I_C = 2\text{ mA}$, $R_L = 100\ \Omega$
t_{IOFF}	Turn-off Time 3C91C, 3C92C (TX, TXV))	-	-	6	μs	$V_{CC} = 5\text{ V}$, $I_C = 2\text{ mA}$, $R_L = 100\ \Omega$

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | Optek Technology, Inc.
1645 Wallace Drive, Ste. 130, Carrollton, TX USA 75006 | Ph: +1 972 323 2200
www.ttelectronics.com | sensors@ttelectronics.com

Hi-Reliability Optically Coupled Isolator





Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Coupled						
C_{IO}	Input-to-Output Capacitance 3C91C, 3C92C (TX, TXV) 3N243, 3N244, 3N245 (TX, TXV) 3N261, 3N262, 3N263 (TX, TXV)	-	2	2.5	pF	$f = 1\text{ MHz}$ $V_{IO} = 0\text{ V}, f = 1.00\text{ MHz}^{(1)}$ $V_{IO} = 0\text{ V}, f = 1.00\text{ MHz}^{(1)}$
I_{IO}	Leakage Input -to-Output 3N243, 3N244, 3N245 (TX, TXV) 3N261, 3N262, 3N263 (TX, TXV)	-	-	100	nA	$V_{IO} = \pm 1.00\text{ kVDC}^{(1)}$ $V_{IO} = \pm 1.00\text{ kVDC}^{(1)}$
R_{IO}	Isolation Resistance 3C91C, 3C92C (TX, TXV)	10^9	-	-	Ω	$V_{IO} = +1\text{ kV}$
t_r	Output Rise Time 3N243, 3N244, 3N245 (TX, TXV) 3N261, 3N262 (TX, TXV) 3N263 (TX, TXV)	-	-	10 20 25	μs	$V_{CC} = 10.0\text{ V}, I_F = 10.0\text{ mA}, R_L = 100\ \Omega^{(2)}$ $V_{CC} = 10.0\text{ V}, I_F = 5.0\text{ mA}, R_L = 100\ \Omega^{(2)}$ $V_{CC} = 10.0\text{ V}, I_F = 5.0\text{ mA}, R_L = 100\ \Omega^{(2)}$
t_f	Output Fall Time 3N243, 3N244, 3N245 (TX, TXV) 3N261, 3N262 (TX, TXV) 3N263 (TX, TXV)	-	-	10 10 25	μs	$V_{CC} = 10.0\text{ V}, I_F = 10.0\text{ mA}, R_L = 100\ \Omega^{(2)}$ $V_{CC} = 10.0\text{ V}, I_F = 5.0\text{ mA}, R_L = 100\ \Omega^{(2)}$ $V_{CC} = 10.0\text{ V}, I_F = 5.0\text{ mA}, R_L = 100\ \Omega^{(2)}$

Notes:

- Measured with input leads shorted together and output leads shorted together.
- The input waveform is supplied by a generator with the following characteristics: $Z_{OUT} = 50\ \Omega$, $t_r \leq 15\text{ ns}$, duty cycle $\sim 1\%$, pulse width $\sim 100\text{ ms}$

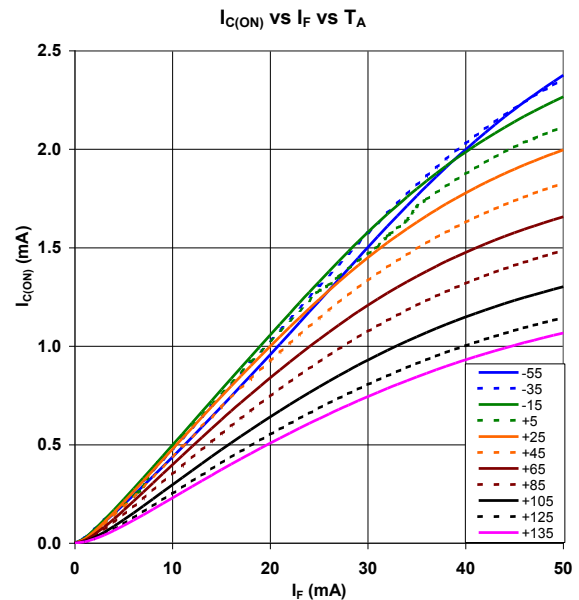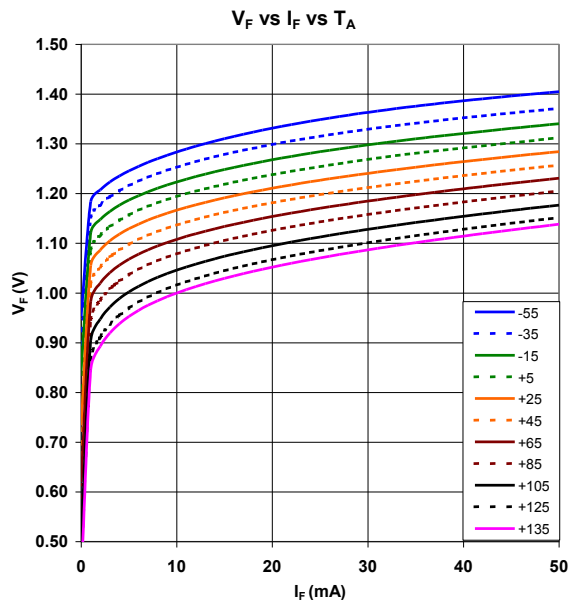

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | Optek Technology, Inc.
1645 Wallace Drive, Ste. 130, Carrollton, TX USA 75006 | Ph: +1 972 323 2200
www.ttelectronics.com | sensors@ttelectronics.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TT Electronics:](#)

[3N261](#) [3N244](#) [3N263](#) [3N245](#) [3C91C](#) [3N262](#) [3N243](#) [3C92C](#) [3C92CTX](#) [3N263TX](#)